
ADELS contact

Screw Connectors

1000 K/ 7 DS

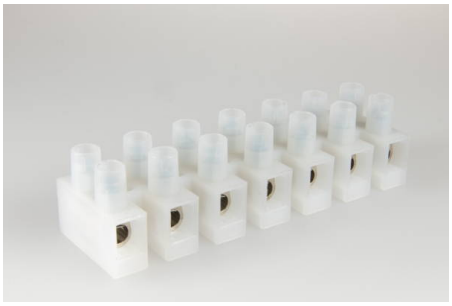

Terminal Block, 7 pole, Insulating Material: PA 6, Cross-Section: 6.0 mm², Pin Spacing: 12.0 mm, Wire Protector (DS): yes, Fixing: Screw, Voltage Rating: 500 V, Current Rating: 41 A

Order Info

Reference Number (ref. no.)	125707
Applications	Lighting, Installation, Electrical Appliances, Transformers
PU	250

Type

Type	Terminal Block
Number of poles	7 pole
Clamping Units per Pole	1
Colour	natural
Cross-Section	6.0 mm²
Connection Type	Screw
Wire Protector (DS)	yes

Technical Data

Voltage Rating	500 V
Current Rating	41 A
Insulating Material	PA 6
Contact Material	Brass
Core Cross-Section min.	0.5 mm²
Core Cross-Section max.	6.0 mm²
Flammability Rating	V-2
max. Ambient Temperature Operation	85 °C
Type of Conductor Solid	yes
Type of Conductor Flexible	yes
Type of Conductor Stranded	yes
Stripping Length	7.5-8.0 mm
Assembly Contact Screw	0.8x4.0 / ↻ 0.8 Nm
Pin Spacing	12.0 mm
Fixing	Screw
Approbation EN60998	1000_EN60998_20070806_20160412_VDE_ENEC_40021747_web.p
Approbation UL	500_1000_19770222_20071007_UL_E63492_1-01_Description_wet
Approbation CSA	Schraub_Steck_Schraubenlos_SI_Klemmen_20160429_CSA_700765

Accessories

1000 BZ/ 7	191407
ABK 406/ 7	193307
ZEL 110	196420