

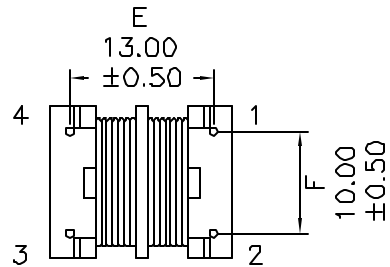
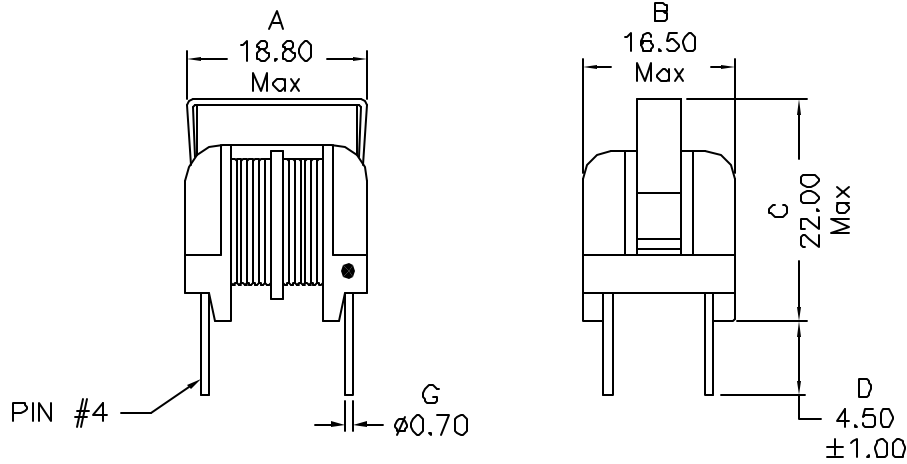


1. Mechanical Dimensions:

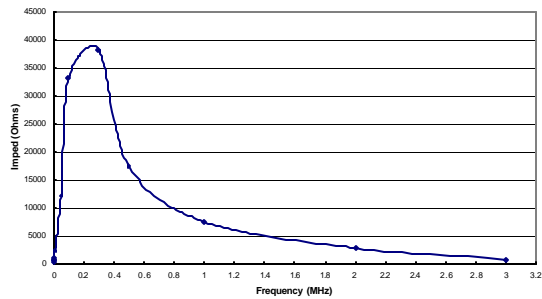


(BOTTOM VIEW)

MARKING: (ON TOP OF CLIP)



DOC REV: A/6

2. Schematic:

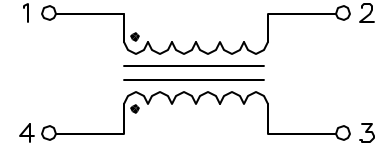

3. Electrical Specifications:

- OCL: 20mH Min @1KHz 0.1V, Each Wdg
- Q: 6 Min @1KHz 0.1V, Each Wdg
- LL: Pins 1-2 550uH Max @100KHz 0.1V, Tie 3&4
- DCR: 3.00 Ohms Max, Each Wdg
- Cw/w: Pins 1-4 5.60pF Max @100KHz 0.1v
- Hipot: 3000VAC for 1 second, Wdg to Wdg
- Insulation Resistance: 100 MOhms Min.
- Rated Current: 500mArms
- Rated Voltage: 300V

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +120°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRS Inc www.XFMRS.com	Title: LINE FILTER	
	P/N: XF0203-00U3	REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	DWN.	Xianyí
	CHK.	YK Liao
SHEET 1 OF 1	APP.	Joe Huff
		Sep-08-08