FEATURES

- **Max. propagation delay of 1500ps**
- **I_{EE} min. of –120mA**
- **Industry standard 100K ECL levels**
- **Extended supply voltage option: V_{EE} = –4.2V to –5.5V**
- **Voltage and temperature compensation for improved noise immunity**
- **Internal 75kΩ input pull-down resistors**
- **120% faster than Fairchild**
- **Approximately 40% lower power than Fairchild**
- **Function and pinout compatible with Fairchild F100K**
- **Available in 28-pin PLCC packages**


DESCRIPTION

The SY100S366 is an ultra-fast 9-bit magnitude comparator designed for use in high-performance ECL systems. The device compares the arithmetic value of two 9-bit words and indicates whether one word is greater than or equal to the other. The inputs on the device have 75kΩ pull-down resistors.

PIN NAMES

Pin	Function
A_0 – A_8	A Data Inputs
B_0 – B_8	B Data Inputs
A > B	A Greater Than B Output
B > A	B Greater Than A Output
$\overline{A = B}$	Complement A Equal to B Output (Active LOW)
V_{EES}	V_{EE} Substrate
V_{CCA}	V_{CCO} for ECL Outputs

PACKAGE/ORDERING INFORMATION

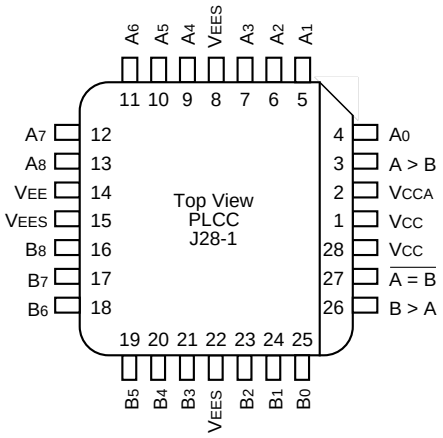

28-Pin PLCC (J28-1)


Ordering Information

Part Number	Package Type	Operating Range	Package Marking	Lead Finish
SY100S366JC	J28-1	Commercial	SY100S366JC	Sn-Pb
SY100S366JCTR[1]	J28-1	Commercial	SY100S366JC	Sn-Pb
SY100S366JZ[2]	J28-1	Commercial	SY100S366JZ with Pb-Free bar-line indicator	Matte-Sn
SY100S366JZTR[1, 2]	J28-1	Commercial	SY100S366JZ with Pb-Free bar-line indicator	Matte-Sn

Notes:

1. Tape and Reel.
2. Pb-Free package is recommended for new designs.

BLOCK DIAGRAM

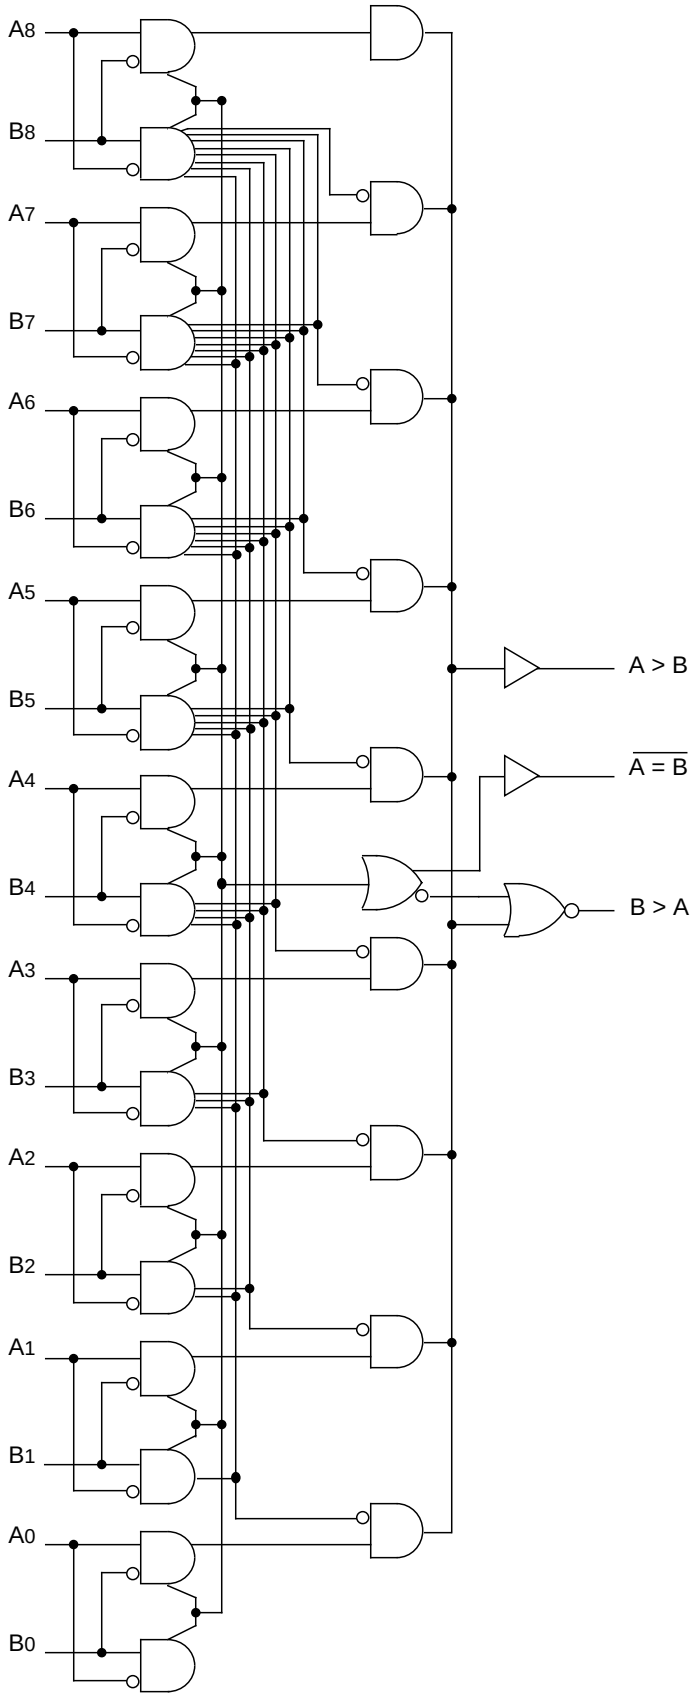

TRUTH TABLE[1]

Inputs									Outputs		
A_8B_8	A_7B_7	A_6B_6	A_5B_5	A_4B_4	A_3B_3	A_2B_2	A_1B_1	A_0B_0	A > B	B > A	$\overline{A = B}$
H L L H $A_8 = B_8$	H L L H								H L H L	L H L H	H H H H
$A_8 = B_8$ $A_8 = B_8$ $A_8 = B_8$ $A_8 = B_8$	$A_7 = B_7$ $A_7 = B_7$ $A_7 = B_7$ $A_7 = B_7$	H L L H $A_6 = B_6$ $A_6 = B_6$	H L L H						H L H L	L H L H	H H H H
$A_8 = B_8$ $A_8 = B_8$ $A_8 = B_8$ $A_8 = B_8$	$A_7 = B_7$ $A_7 = B_7$ $A_7 = B_7$ $A_7 = B_7$	$A_6 = B_6$ $A_6 = B_6$ $A_6 = B_6$ $A_6 = B_6$	$A_5 = B_5$ $A_5 = B_5$ $A_5 = B_5$ $A_5 = B_5$	H L L H $A_4 = B_4$ $A_4 = B_4$	H L L H				H L H L	L H L H	H H H H
$A_8 = B_8$ $A_8 = B_8$ $A_8 = B_8$ $A_8 = B_8$	$A_7 = B_7$ $A_7 = B_7$ $A_7 = B_7$ $A_7 = B_7$	$A_6 = B_6$ $A_6 = B_6$ $A_6 = B_6$ $A_6 = B_6$	$A_5 = B_5$ $A_5 = B_5$ $A_5 = B_5$ $A_5 = B_5$	$A_4 = B_4$ $A_4 = B_4$ $A_4 = B_4$ $A_4 = B_4$	$A_3 = B_3$ $A_3 = B_3$ $A_3 = B_3$ $A_3 = B_3$	H L L H $A_2 = B_2$ $A_2 = B_2$	H L L H		H L H L	L H L H	H H H H
$A_8 = B_8$ $A_8 = B_8$ $A_8 = B_8$	$A_7 = B_7$ $A_7 = B_7$ $A_7 = B_7$	$A_6 = B_6$ $A_6 = B_6$ $A_6 = B_6$	$A_5 = B_5$ $A_5 = B_5$ $A_5 = B_5$	$A_4 = B_4$ $A_4 = B_4$ $A_4 = B_4$	$A_3 = B_3$ $A_3 = B_3$ $A_3 = B_3$	$A_2 = B_2$ $A_2 = B_2$ $A_2 = B_2$	$A_1 = B_1$ $A_1 = B_1$ $A_1 = B_1$	H L L H $A_0 = B_0$	H L L	L H H	H H H

Note:

1. H = HIGH Voltage Level, L = LOW Voltage Level, Blank = X = Don't Care

DC ELECTRICAL CHARACTERISTICS

V_{EE} = –4.2V to –5.5V unless otherwise specified; $V_{CC} = V_{CCA}$ = GND


Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
I_{IH}	Input HIGH Current, All Inputs	—	—	200	µA	$V_{IN} = V_{IH}$ (Max.)
I_{EE}	Power Supply Current	–120	–86	–60	mA	Inputs Open

AC ELECTRICAL CHARACTERISTICS

V_{EE} = –4.2V to –5.5V unless otherwise specified; $V_{CC} = V_{CCA}$ = GND

Symbol	Parameter	$T_A = 0°C$		$T_A = +25°C$		$T_A = +85°C$		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.		
t_{PLH} t_{PHL}	Propagation Delay Data to Output	400	1500	400	1500	400	1500	ps	
t_{TLH} t_{THL}	Transition Time 20% to 80%, 80% to 20%	300	900	300	900	300	900	ps	

TIMING DIAGRAM

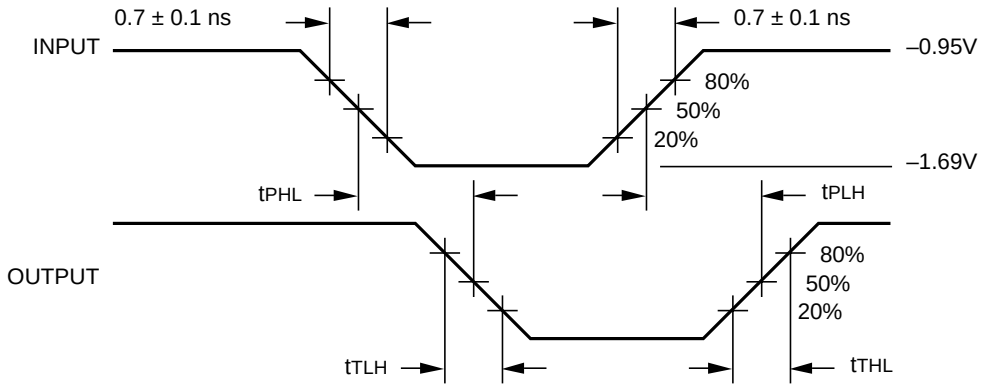


Propagation Delay and Transition Times

Note:

V_{EE} = –4.2V to –5.5V unless otherwise specified; V_{CC} = V_{CCA} = GND

28-PIN PLCC (J28-1)

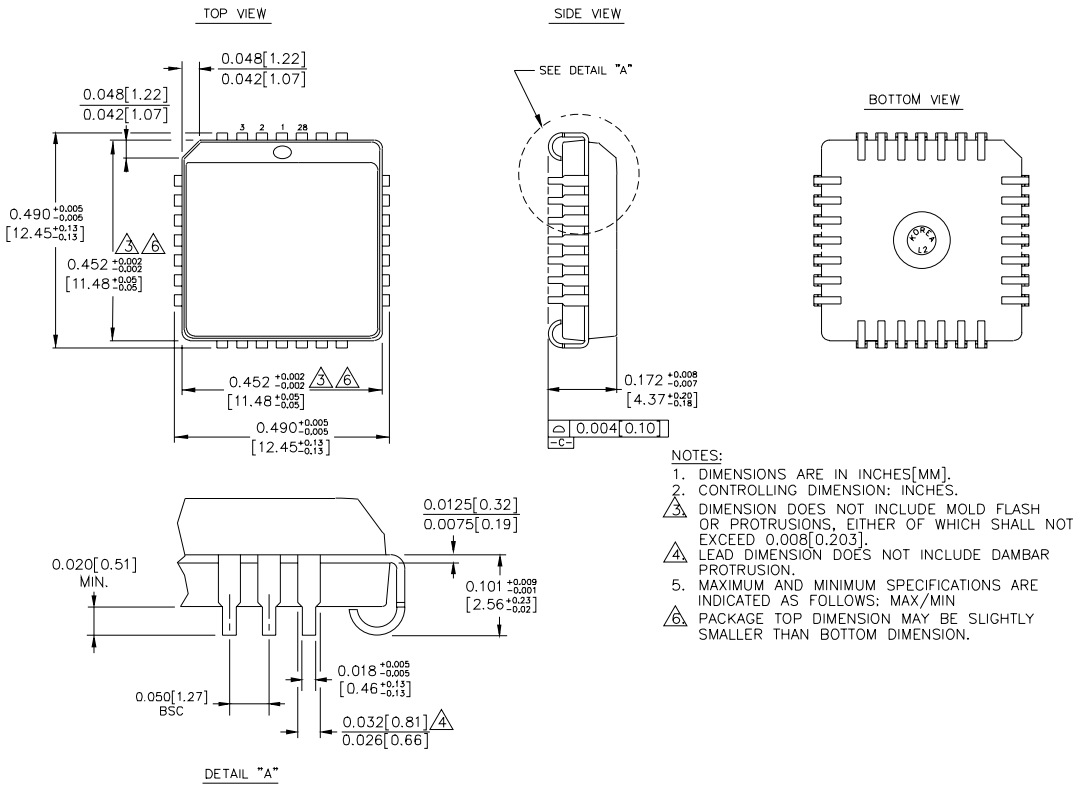

NOTES:
1. DIMENSIONS ARE IN INCHES[MM].
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.008[0.203].
4. LEAD DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION.
5. MAXIMUM AND MINIMUM SPECIFICATIONS ARE INDICATED AS FOLLOWS: MAX/MIN
6. PACKAGE TOP DIMENSION MAY BE SLIGHTLY SMALLER THAN BOTTOM DIMENSION.

Rev. 03

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.