

Basic terminal block - PI-EX-MB-DI/16/FLK14/PLC/KD-S1 - 2835985

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Ex i motherboard to accept 16 x PI-Ex i NAMUR repeater power supplies (PI-EX-NAM...), FLK pin strips for connection to S7-300 digital in cards using system cables, disconnect plug terminal blocks for the field side, assembly on NS 32, or NS 35/7.5.



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 909130
GTIN	4017918909130

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	260 mm
Height	127.5 mm
Depth	92 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 75 °C

General

Nom. voltage	20 V DC ... 35 V DC
Nominal current I_N	60 mA (max. current consumption)
Housing insulation material	Polyamide PA non-reinforced, polycarbonate PC
Flammability rating according to UL 94	V0
Color	green
Conformance	CE-compliant

Basic terminal block - PI-EX-MB-DI/16/FLK14/PLC/KD-S1 - 2835985

Technical data

General

ATEX	# II (1) GD [EEx ia] IIC
------	--------------------------

Standards and Regulations


Flammability rating according to UL 94	V0
Conformance	CE-compliant
ATEX	# II (1) GD [EEx ia] IIC

Environmental Product Compliance


REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

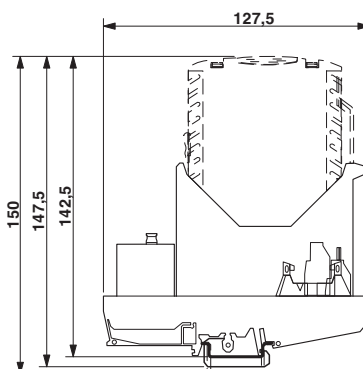

Dimensional drawing

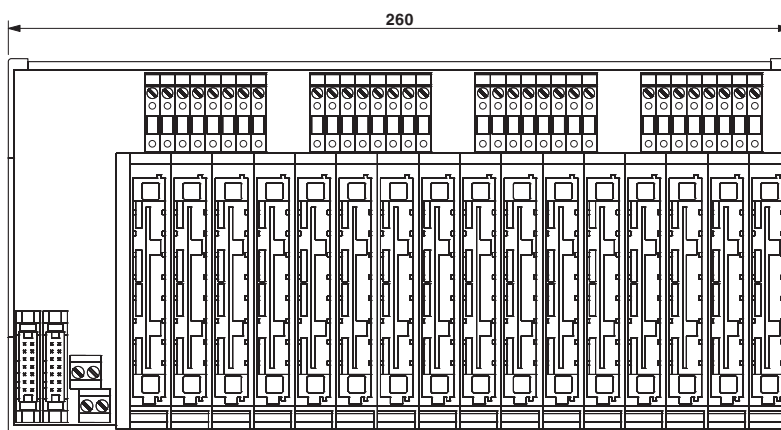

Approvals

Approvals

Basic terminal block - PI-EX-MB-DI/16/FLK14/PLC/KD-S1 - 2835985

Approvals

Approvals

EAC

Ex Approvals

ATEX

Approval details

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>