



SURFACE MOUNT HIGH VOLTAGE SWITCHING DIODE ARRAY

This device features two series-connected diode pairs which can be connected to form a full-wave bridge. It is housed in a very small SOT-23 6L surface mount package.


FEATURES

- High Reverse Voltage Rating
- Fast Switching Speed
- Low Capacitance
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

APPLICATIONS

- Power Supplies
- High Speed Rectification

Marking Code: B34

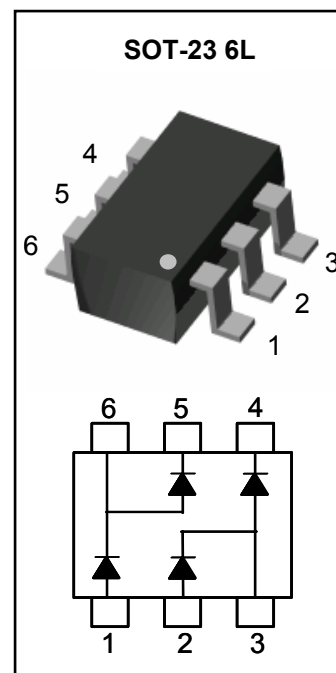

MAXIMUM RATINGS (Per Diode) $T_J = 25^{\circ}\text{C}$ Unless otherwise noted

Rating	Symbol	Value	Units
Repetitive Peak Reverse Voltage	V_{RRM}	350	V
Continuous Reverse Voltage	V_R	300	V
RMS Reverse Voltage	V_{RMS}	212	V
Continuous Forward Current (Note 1)	I_F	225	mA
Peak Repetitive Forward Current (Note 1)	I_{FRM}	625	mA
Non-repetitive Peak Forward Current, $t = 1\text{sec}$, Square Wave	I_{FSM}	1.0	A
Total Power Dissipation (Note 1)	P_{tot}	350	mW
Operating Junction Temperature Range	T_J	-55 to +150	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Units
Thermal Resistance, Junction to Ambient (Note 1)	R_{thja}	357	$^{\circ}\text{C/W}$

Note 1. FR-5 Board 1.0 x 0.75 x 0.062 in.



ELECTRICAL CHARACTERISTICS (Per Diode) $T_J = 25^\circ\text{C}$ Unless otherwise noted

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Breakdown Voltage (Note 1)	V_{BR}	$I_{BR} = 150\mu\text{A}$	350	-	-	V
Forward Voltage (Note 1)	V_F	$I_F = 20\text{mA}$	-	0.82	0.87	V
		$I_F = 100\text{mA}$	-	0.95	1.0	
		$I_F = 200\text{mA}$	-	1.0	1.25	
Reverse Leakage Current (Note 1)	I_R	$V_R = 240\text{V}$	-	0.02	0.1	μA
		$V_R = 240\text{V}$ $T_J = 150^\circ\text{C}$	-	0.5	100	
Total Capacitance	C_T	0Vdc Bias, $f = 1\text{MHz}$	-	1.7	5.0	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 30\text{mA}$, $I_{RR} = 3\text{mA}$ $R_L = 100\text{ohms}$	-	-	50	ns

Note 1. Short duration pulse test to avoid self-heating effect

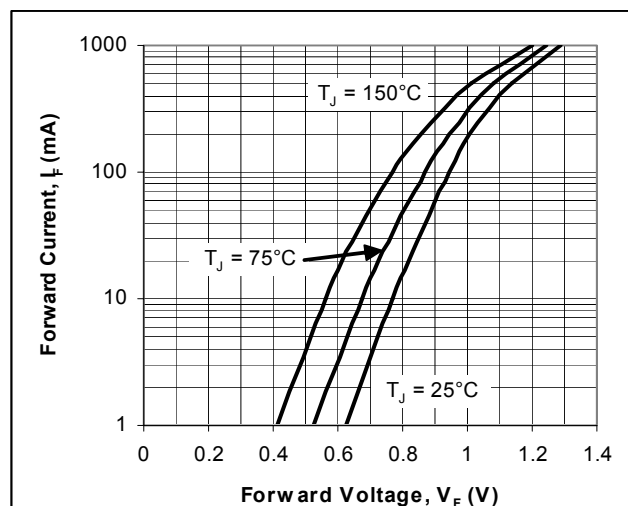


Fig. 1. Typical Forward Characteristics

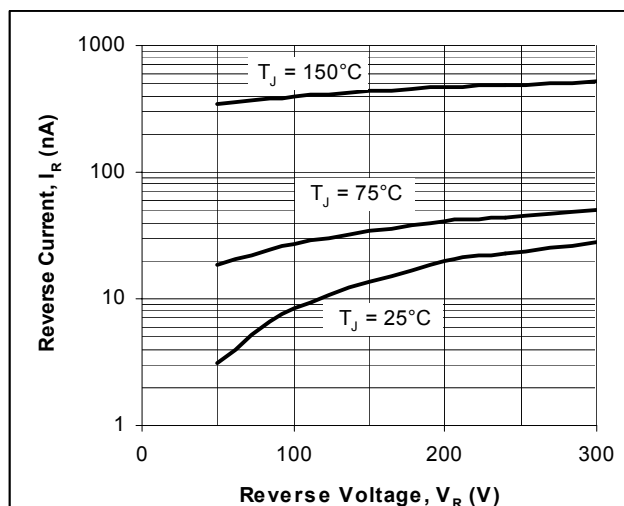


Fig. 2. Typical Reverse Characteristics



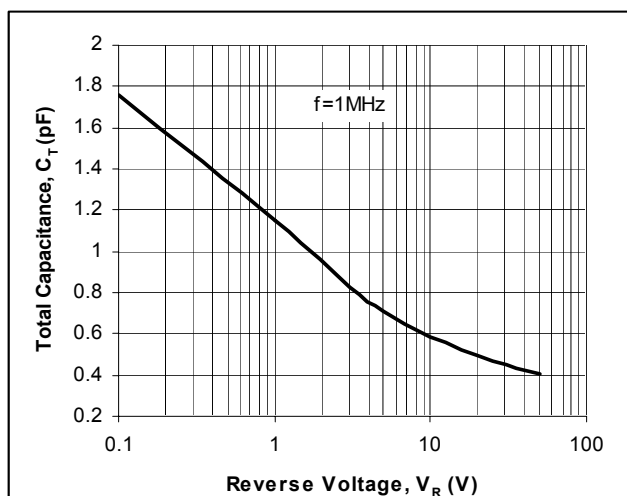


Fig. 3. Typical Capacitance

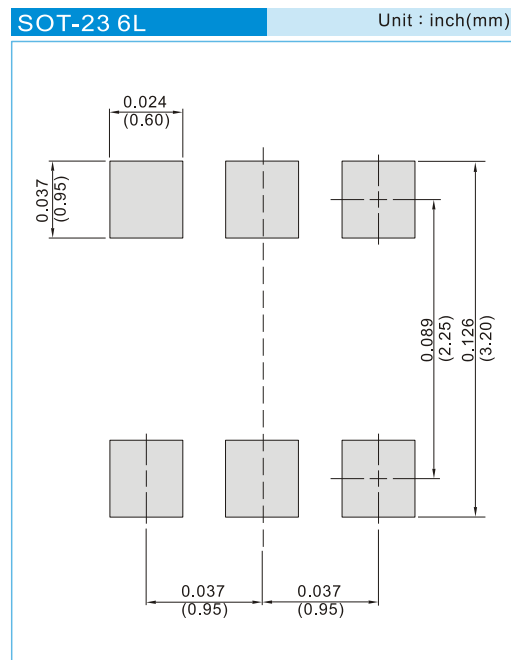

PACKAGE LAYOUT AND SUGGESTED PAD DIMENSIONS

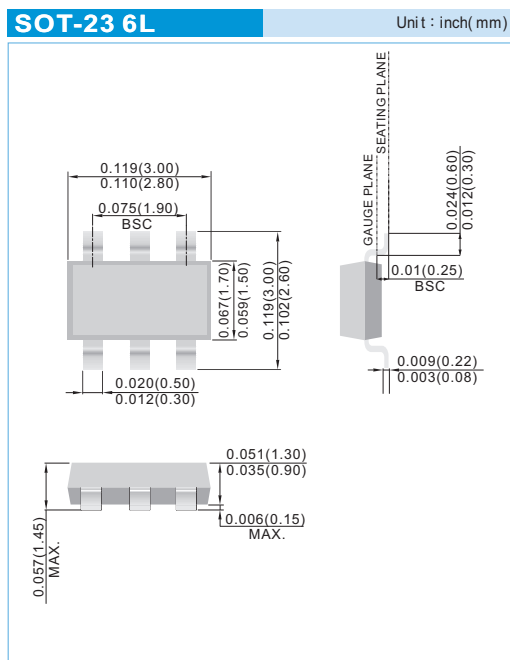

ORDERING INFORMATION

MMBD3004BRM T/R7 - 7" reel, 3K units per reel. Pin 1 towards tape sprocket holes

MMBD3004BRM T/R7R - 7" reel, 3K units per reel. Pin 1 away from tape sprocket holes

MMBD3004BRM T/R13 - 13" reel, 10K units per reel. Pin 1 towards tape sprocket holes

MMBD3004BRM T/R13R - 13" reel, 10K units per reel. Pin 1 away from tape sprocket holes



MMBD3004BRM

Part No_packing code_Version

MMBD3004BRM_R1_00001

MMBD3004BRM_R2_00001

MMBD3004BRM_S1_00001

MMBD3004BRM_S2_00001

For example :

RB500V-40 - **R2** - **00001**

Part No.

Serial number

Version code means HF

Packing size code means 13"

Packing type means T/R

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



MMBD3004BRM

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.