



CIRCUIT: SPDT
CONTACT CONFIGURATION


SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	OPEN	2-1

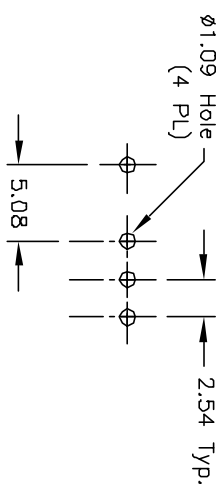

RECOMMENDED P.C.B. LAYOUT

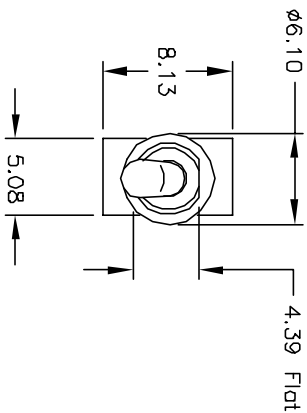

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING: 3A @120VAC OR 28VDC, 1A @250VAC
 5. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
 6. INSULATION RESISTANCE: 1,000 M ohm min.
 7. DIELECTRIC STRENGTH: 1,000 V RMS @sed level.
 8. OPERATING TEMP. -30°C to 85°C
 9. DESIGNATE MAJOR DIMENSION ▲

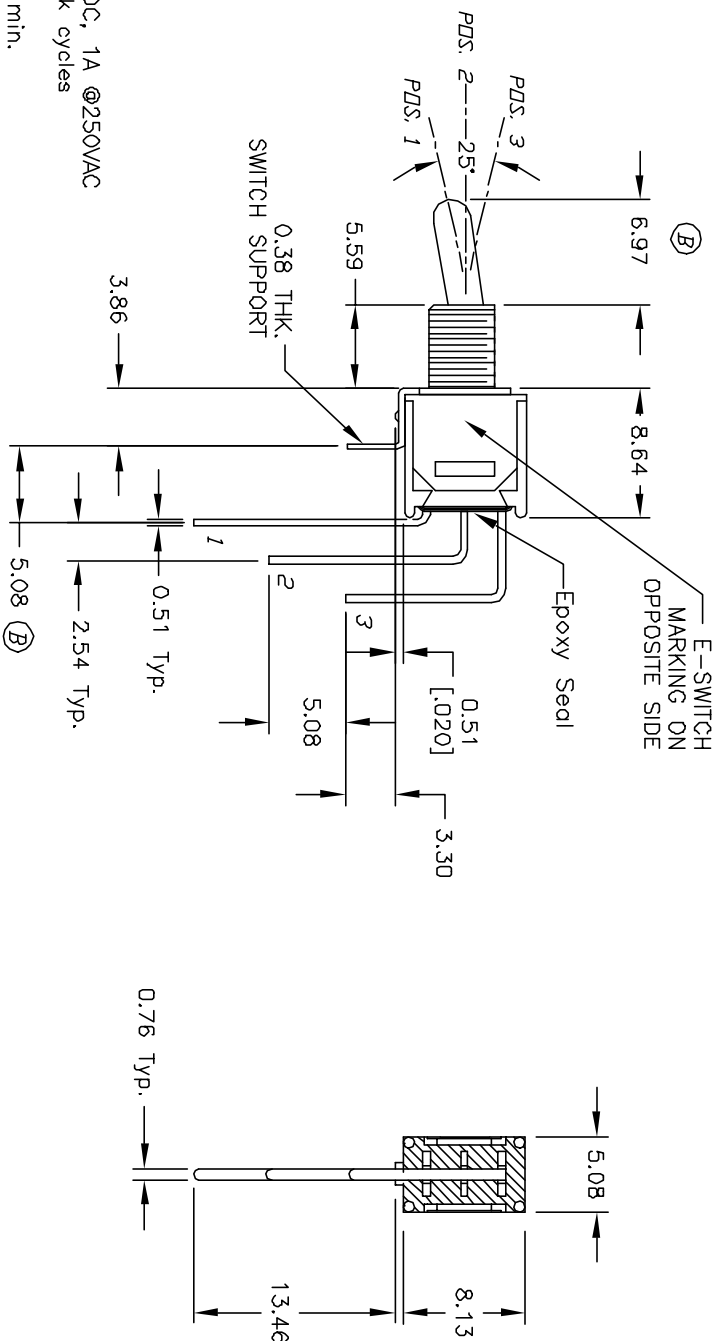

TITLE			
200 MSP-1 T3 B1 M7 Q E			
E-SWITCH®			
REV.	ECN NO.	REVISION DESCRIPTION	DATE
B		REVISED ACTUATOR LENGTH	4/13/01
		DESCRIPTION	DATE
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED	CHKD
SCALE		DATE	DR
2:1		4/2/01	CJB
		DWG	REV
		T211070	B