Elektronische Bauelemente

SRS3080


Voltage 80V 30.0 Amp
Trench Barrier Schottky Rectifier

RoHS Compliant Product
A suffix of "-C" specifies halogen free

FEATURES

- Trench Barrier Schottky technology
- Low forward voltage drop
- Low reverse current
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction


TO-220

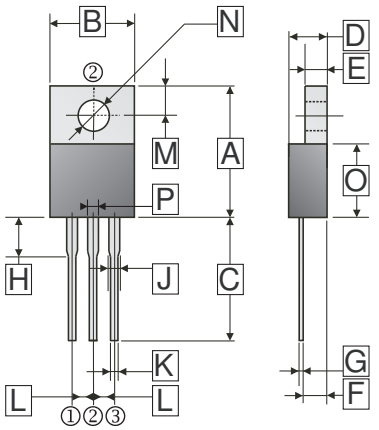

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.22	16.51	J	0.7	1.78
B	9.65	10.67	K	0.38	1.02
C	12.50	14.75	L	2.39	2.69
D	3.56	4.90	M	2.50	3.43
E	0.51	1.45	N	3.10	4.09
F	2.03	2.92	O	8.38	9.65
G	0.31	0.76	P	0.89	1.45
H	3.5	4.5			

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.98 g (Approximate)



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25℃ ambient temperature unless otherwise s pecified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter		Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	80	V
Working Peak Reverse Voltage		V_{RSM}	80	V
Maximum DC Blocking Voltage		V_{DC}	80	V
Maximum Average Forward Rectified Current	(Per Leg)	I_F	15	A
	(Per Device)		30	
Peak Forward Surge Current, 8.3 ms single half sine-wave		I_{FSM}	150	A
Voltage Rate of Chance (Rated V_R)		dv/dt	10000	V / μs
Typical Thermal Resistance		$R_{\theta JC}$	2	℃ /W
Operating and Storage Temperature Range		T_J,T_{STG}	-40~150	℃


ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V_F	0.6	0.63	V	I_F = 10A, T_J = 25℃
		0.66	0.69		I_F = 15A, T_J = 25℃
		0.64	-		I_F = 15 A, T_J = 100℃
Maximum DC Reverse Current at Rated DC Blocking Voltage [2]	I_R	-	0.2	mA	T_J=25℃
		-	20		T_J=100℃
Typical Junction Capacitance [1]	C_J	750	-	pF	


NOTES:
1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Pulse Test：Pulse Width = 300 μs, Duty Cycle ≦ 2.0%.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

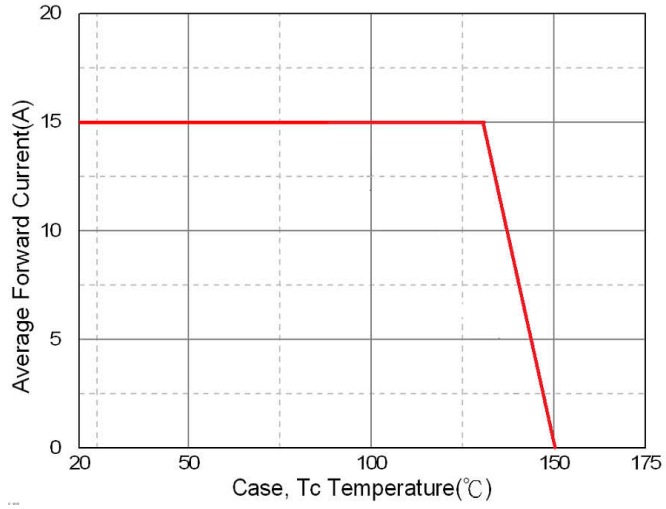


Typical Forward Characteristic

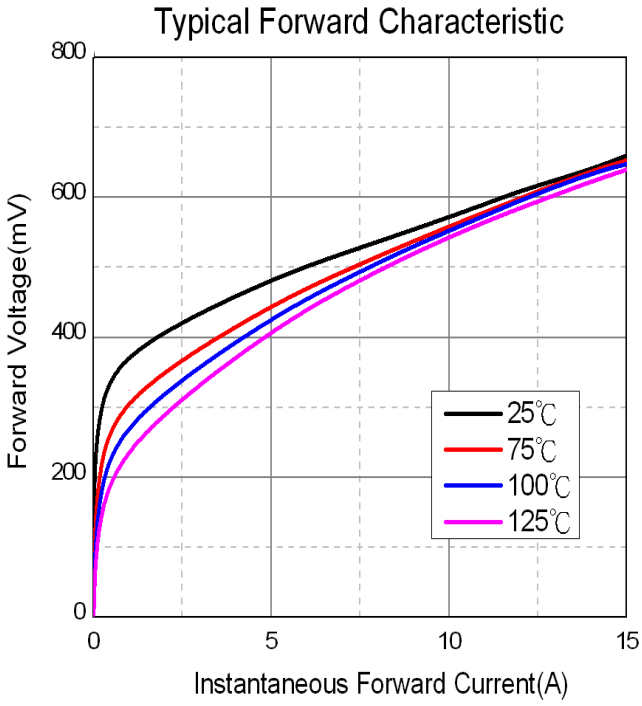

Typical Junction Capacitance

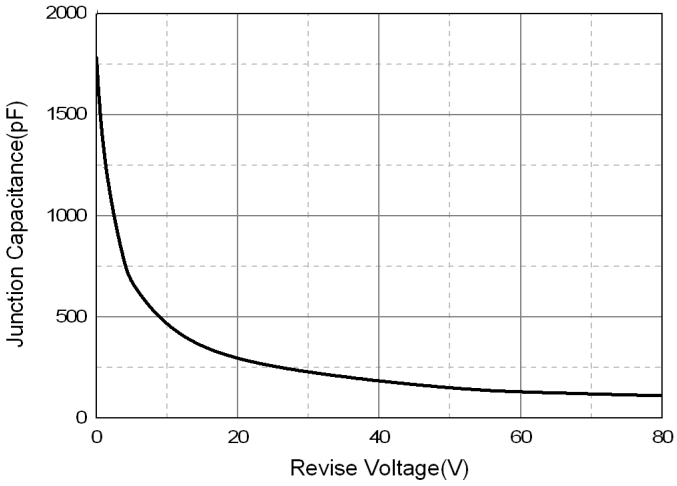

Typical Reverse Characteristic

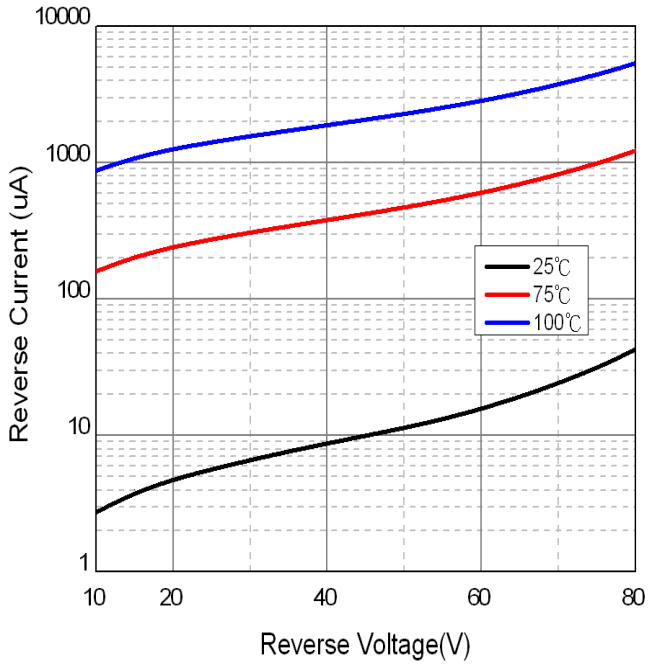

Maximum Non-Repetitive Forward Surge Current

