
LAST UPDATED: March 12, 2001


L1932 MINIATURE BARRIER STRIP

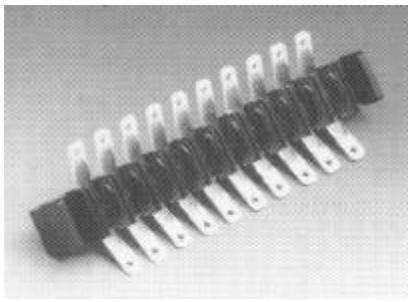

A ten way barrier type terminal block which can easily be sub-divided if required. It has two rows of solder or solderless snap-on connextors (2.8mm x 0.61mm).

CURRENT RATING:	**5A**
TEMPERATURE RANGE:	**-55°C to +100°C (ambient)**
VOLTAGE PROOF:	**2 KV a.c. rms**
INSULATION RESISTANCE:	**≥100 megohms**
MATERIALS:	**Insulator : Polycarbonate resin** **Contacts : Brass, silver plated**
WEIGHT (AVERAGE):	**7.7g**
APPROVALS	**None**

ORDERING REFERENCE: L1932

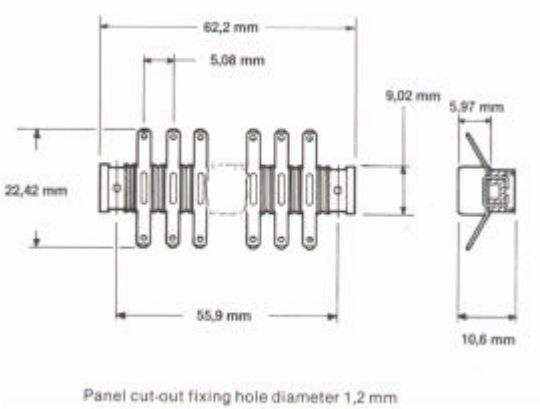

Panel cut-out fixing hole diameter 1,2 mm

BLP reserve the right to change without prior notice the information contained within this leaflet

BLP Components Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com http://www.blpcomp.com