


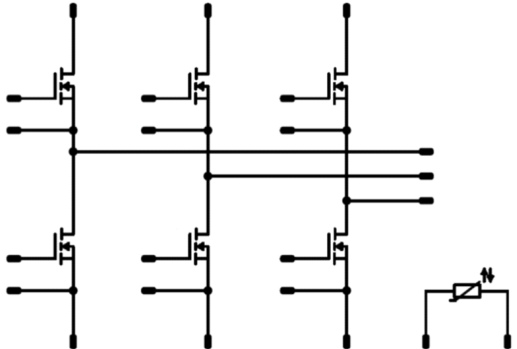

Vincotech

flowPACK 1 SiC		900 V / 35 mΩ	
Features • Wolfspeed(Cree)TM Silicon Carbide Power MOSFET, C2MTM MOSFET Technology • Sixpack with three separated legs • Solderless Press-fit Mounting Technology		flow 1 12mm housing 	
Target applications • Power Supply		Schematic 	
Types • 10-PY096PA035ME-L224F18Y			

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
Inverter Switch				
Drain-source voltage	V_{DS}		900	V
Drain current	I_D	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	44	A
Peak drain current	I_{DM}	t_p limited by T_{jmax}	180	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	63	W
Gate-source voltage	V_{GS}		-8/+18	V
Maximum Junction Temperature	T_{jmax}		150	°C



Vincotech

10-PY096PA035ME-L224F18Y
target datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
-----------	--------	-----------	-------	------

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...(T_{jmax} - 25)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage $t_p = 2\text{ s}$	4000	V
Creepage distance			min. 12,7	mm
Clearance			12,01	mm
Comparative Tracking Index	CTI		> 200	



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
			V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max	

Inverter Switch

Static

Drain-source on-state resistance	$r_{DS(on)}$		15		40	25 150		33 45	39	mΩ
Gate-source threshold voltage	$V_{GS(th)}$	$V_{GS} = V_{DS}$			0,01	25	1,8	2,1	4	V
Gate to Source Leakage Current	I_{GSS}		15	0		25			500	nA
Zero Gate Voltage Drain Current	I_{DSS}		0	900		25			200	μA
Internal gate resistance	r_g							2,35		Ω
Gate charge	Q_g	-4/15	400	40	25			60,8		nC
Gate to source charge	Q_{GS}							15		
Gate to drain charge	Q_{GD}							24		
Short-circuit input capacitance	C_{iss}	$f = 1$ MHz	0	600	25			1320		pF
Short-circuit output capacitance	C_{oss}							120		
Reverse transfer capacitance	C_{rss}							8		

Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	phase-change material $\lambda = 3,4$ W/mK						1,12		K/W
-------------------------------------	---------------	---	--	--	--	--	--	------	--	-----

Reverse Diode Static

Diode Forward Voltage	V_{SD}		-4		20	25		4,8		V
-----------------------	----------	--	----	--	----	----	--	-----	--	---

Thermistor


Rated resistance	R					25		22		kΩ
Deviation of R_{100}	$\Delta_{R/R}$	$R_{100} = 1484$ Ω				100	-5		5	%
Power dissipation	P					25		5		mW
Power dissipation constant						25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. ± 1 %				25		3962		K
B-value	$B_{(25/100)}$	Tol. ± 1 %				25		4000		K
Vincotech NTC Reference									I	





Vincotech

10-PY096PA035ME-L224F18Y

target datasheet

Ordering Code & Marking									
Version			Ordering Code						
without thermal paste 12mm housing with Press-fit pins			10-PY096PA035ME-L224F18Y						
NN-NNNNNNNNNNNNNN TTTTTTVV WWYY UL VIN LLLLL SSSS 			Text		Name	Date code	UL & VIN	Lot	Serial
					NN-NNNNNNNNNNNNNN-TTTTTTV	WWYY	UL VIN	LLLLL	SSSS
			Datamatrix	Type&Ver	Lot number	Serial	Date code		
				TTTTTTTVV	LLLLL	SSSS	WWYY		


Outline							
Pin table [mm]				Pin table [mm]			
Pin	X	Y	Function	Pin	X	Y	Function
1	52,2	2,7	DC-3	30	39	28,2	PH3
2	52,2	0	DC-3	31	42	26,7	S16
3	45,5	12	G15	32	45	25,7	G16
4	42,5	13	S15				
5	41,2	0	DC+3				
6	38,5	0	DC+3				
7	33,1	0	DC+2				
8	30,4	0	DC+2				
9	25	10	G13				
10	22	11	S13				
11	19,4	0	DC-2				
12	16,7	0	DC-2				
13	13,7	0	DC-1				
14	11	0	DC-1				
15	8,7	12	G11				
16	5,7	13	S11				
17	0	0	DC+1				
18	0	2,7	DC+1				
19	14,3	15,6	THERM2				
20	16,1	12,6	THERM1				
21	0	28,2	PH1				
22	2,7	28,2	PH1				
23	5,7	26,7	S12				
24	8,7	25,7	G12				
25	19,4	28,2	PH2				
26	22,1	28,2	PH2				
27	23,1	25,2	S14				
28	26,1	24,2	G14				
29	36,3	28,2	PH3				

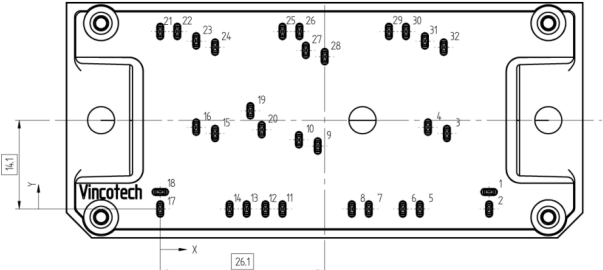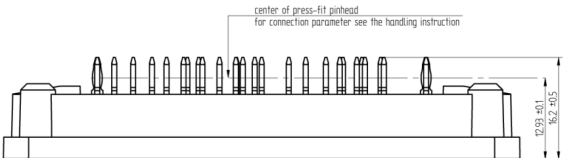

Tolerance of pinpositions: ±0,5mm at the end of pins
Dimension of coordinate axis is only offset without tolerance



Vincotech

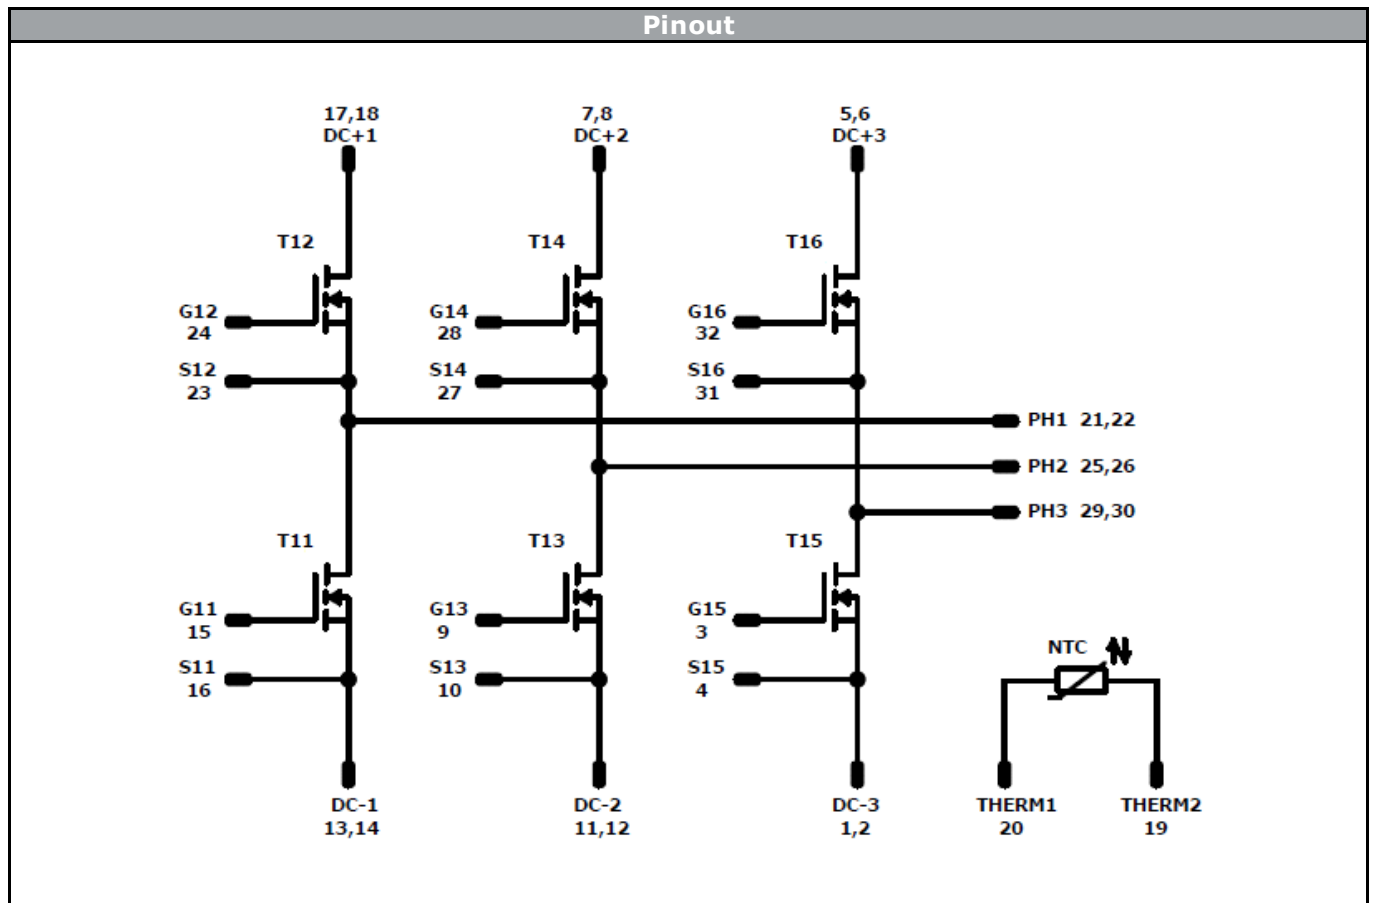

Identification					
ID	Component	Voltage	Current	Function	Comment
T11,T12,T13 T14,T15,T16	MOSFET	900 V	35 mΩ	Inverter Switch	
NTC	Thermistor			Thermistor	



Vincotech

10-PY096PA035ME-L224F18Y
target datasheet

Packaging instruction			
Standard packaging quantity (SPQ)	100	>SPQ	Standard
		<SPQ	Sample

Handling instruction
Handling instructions for <i>flow 1</i> packages see vincotech.com website.

Package data
Package data for <i>flow 1</i> packages see vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website.



Document No.:	Date:	Modification:	Pages
10-PY096PA035ME-L224F18Y-T1-14	18 Oct. 2016		

Product status definition		
Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.