

EDA100 SERIES

AC-DC ENCLOSED SWITCHING POWER SUPPLY



FEATURES

- UNIVERSAL INPUT 88~264VAC
- SHORT CIRCUIT PROTECTION
- INTERNAL INPUT FILTER
- 3 YEARS WARRANTY
- HIGH EFFICIENCY UP TO 89%
- HIGH AVERAGE EFFICIENCY MEET ErP (except 5V model)
- LOW STANDBY POWER CONSUMPTION
- BUILT IN ACTIVE PFC



MODEL LIST

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	EFF. (avg.)
Single Output Models							
EDA100-05	88~264 VAC	80 WATTS	+ 5 VDC	16000 mA	78%	80%	80%
EDA100-12	88~264 VAC	102 WATTS	+ 12 VDC	8500 mA	85%	87%	87%
EDA100-15	88~264 VAC	105 WATTS	+ 15 VDC	7000 mA	86%	88%	87%
EDA100-24	88~264 VAC	108 WATTS	+ 24 VDC	4500 mA	87%	89%	88%

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL						
Characteristics	Conditions		min.	typ.	max.	unit
Switching frequency	Vi nom, Io nom		60		75	KHz
Isolation voltage	Input-Output		3,000 / 4,242			VAC / VDC
	Input-FG		1,500 / 2,121			VAC / VDC
	Output-FG		500 / 710			VAC / VDC
Isolation resistance	Input-Output, @ 500VDC		100			MΩ
Ambient temperature	Operating at Vi nom		-40		+ 71	°C
Derating (see derating curve)	Vi nom, from 56°C to + 71°C				2.5	% / °C
Storage temperature	Non operational		-40		+ 85	°C
Relative humidity	Vi nom, Io nom		20		95	% RH
Temperature coefficient	Vi nom, Io min				± 0.03	% / °C
MTBF	Bellcore Issue 6 @40°C, GB	5V		470,000		Hours
		12V & 15V		521,000		Hours
		24V		545,000		Hours
Altitude during operation	IEC 60068-2-13				4,850	m
			L 158 x W97 x H38			
Cooling	Free air convection					

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

INPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Rated input voltage	Io nom	100		240	VAC
Absolute input max. range	AC in	88		264	VAC
	DC in	120		375	VDC
Input current	Vi : 115 / 230 VAC , Io nom		1,060 / 530		mA
Rated input current	Vi : 88 VAC, Io nom			1,500	mA
Line frequency	Vi nom, Io nom	47		63	Hz
Inrush current	Vi : 115 / 230 VAC , Io nom			35 / 60	A
Power dissipation	Vi : 230 VAC, Io nom				
	5V		20		W
	12V		15		W
	15V		12		W
	24V		10		W
Leakage current	Input-Output			0.25	mA
	Input-FG			3.5	mA
Standby power consumption	Vi nom, Io=0A			0.8	W
	12V, 15V & 24V			0.5	W
Power factor (Active)	Vi : 115/230VAC, Io nom		0.99 / 0.96		

OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy (Adjusted before shipment)	Vi nom, Io max	0		+ 1	%
Minimum load	Vi nom	0			%
Line regulation	Io nom, Vi min ...Vi max			± 0.5	%
Load regulation	Vi nom, Io min ...Io nom			± 1	%
Voltage trim range	Vi nom, 0.8 Io nom				
	5V	4.75		5.5	VDC
	12V	10.8		13.2	VDC
	15V	13.5		16.5	VDC
Rated continuous loading	Vi nom				
	5V	16 A @ 5Vdc / 1.4 A @ 5.5 Vdc			
	12V	8.5 A @ 12Vdc / 7.6 A @ 13.2 Vdc			
	15V	7.0 A @ 15Vdc / 6.0 A @ 16.5 Vdc			
	24V	4.5 A @ 24Vdc / 3.6 A @ 27.6 Vdc			
Hold up time	Vi : 115 / 230 VAC , Io nom	10 / 70			ms
Turn on time	Vi nom, Io nom			1,500	ms
	Vi nom, Io nom → 5V, 12V & 15V models : with 7000 μ F CAP 24V model : with 3500 μ F CAP			2,000	ms
Rise time	Vi nom, Io nom			150	ms
	Vi nom, Io nom → 5V, 12V & 15V models : with 7000 μ F CAP 24V model : with 3500 μ F CAP			500	ms
Fall time	Vi nom, Io nom			150	ms
Transient recovery time	Vi nom, I ~ 0.5 Io nom			2	ms
Ripple & noise	Vi nom, Io nom, BW = 20MHz			100	mV
Power back immunity	Vi nom, Io nom				
	5V	7.5			VDC
	12V	18			VDC
	15V	22			VDC
Capacitor load	Vi nom, Io nom			7,000	μ F
	5V, 12V & 15V			3,500	μ F
Efficiency	Vi nom, Io nom, Po / Pi	Up to 89%, See model list and typ efficiency curve			

CONTROL AND PROTECTION

Characteristics	Conditions	min.	typ.	max.	unit
Input fuse		T3.15A / 250VAC internal			
Internal surge voltage protection	IEC 61000-4-5	Varistor			
Rated over load protection	Vi nom (see typ current limited curve)	130		160	%

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

CONTROL AND PROTECTION

Characteristics	Conditions	min.	typ.	max.	unit
Over voltage protection	Vi nom, 0.8 Io nom (Auto Recovery)	5V			
		5.75		6.75	VDC
		12V	13.8	16.2	VDC
		15V	17.25	20.25	VDC
		24V	28.8	32.4	VDC
Output short circuit		Hiccup mode			

APPROVALS AND STANDARDS


UL / cUL	UL 60950-1 Recognized
TUV	EN 60950-1
CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024 EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8 EN 61000-4-11, ENV 50204, EN 61204-3
Vibration resistance	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 Faces, 3 times for each Face)

PHYSICAL CHARACTERISTICS

Case size	158 x 97 x 38 mm (6.22 x 3.82 x 1.50 inches)
Case material	Metal
Weight	520 g
Packing	0.57kg ; 24pcs / 14.5kg / 1.01CUFT

MECHANISM & PIN CONFIGURATION

mm [inch]

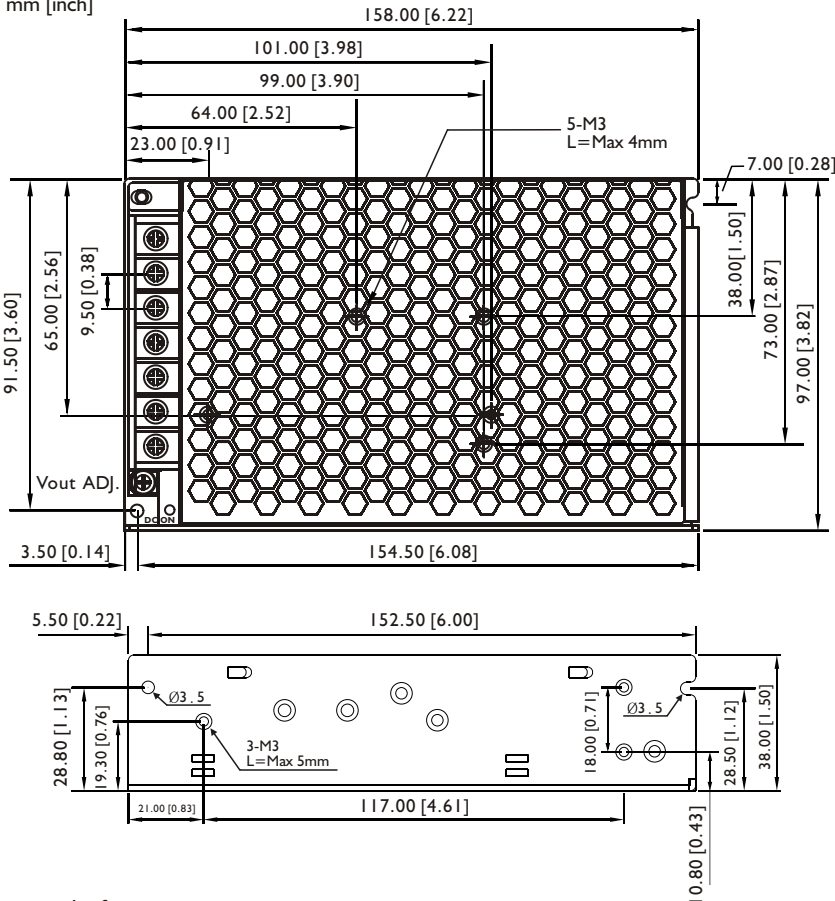


INSTALLATION

Ventilation / Cooling
Normal convection
Connector size range
AWG22-14 (0.2~2mm²) flexible / solid cable,
connector can withstand torque at maximum
12 pound-inches.

GENERAL TOLERANCE

0.00[0.00] - 30.00[1.18]	±0.30[0.01]
30.00[1.18] - 120.00[4.72]	±0.50[0.02]
120.00[4.72] - 400.00[15.75]	±0.80[0.03]

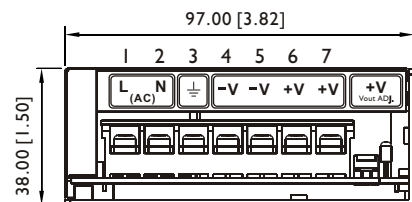


PIN ASSIGNMENT


PIN NO.	Designation		Description
1	IN	L	Input terminals (phase conductor, no polarity at DC input)
2		N	Input terminals (neutral conductor, no polarity at DC input)
3		⊕	Ground this terminal to minimize high-frequency emissions
4, 5	OTHER OUT	V -	Negative output terminal
6, 7		V +	Positive output terminal
		Vout ADJ.	Trimmer-potentiometer for Vout adjustment
		DC ON	Operation indicator LED

CIRCUIT SCHEMATIC


• Block diagram for EDA100 series

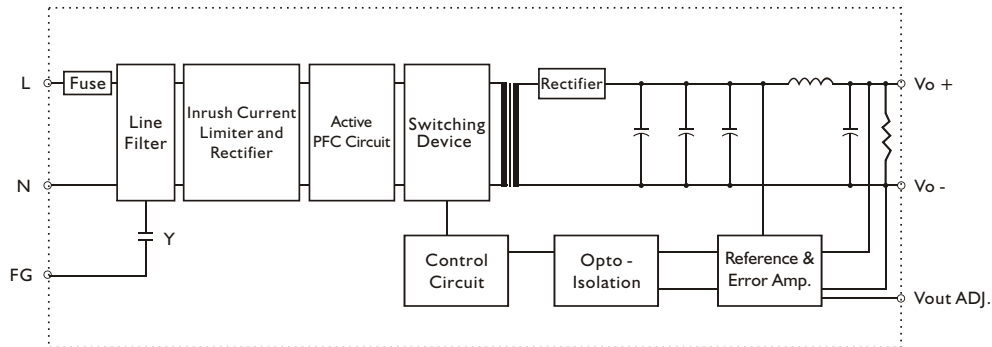

DERATING CURVE

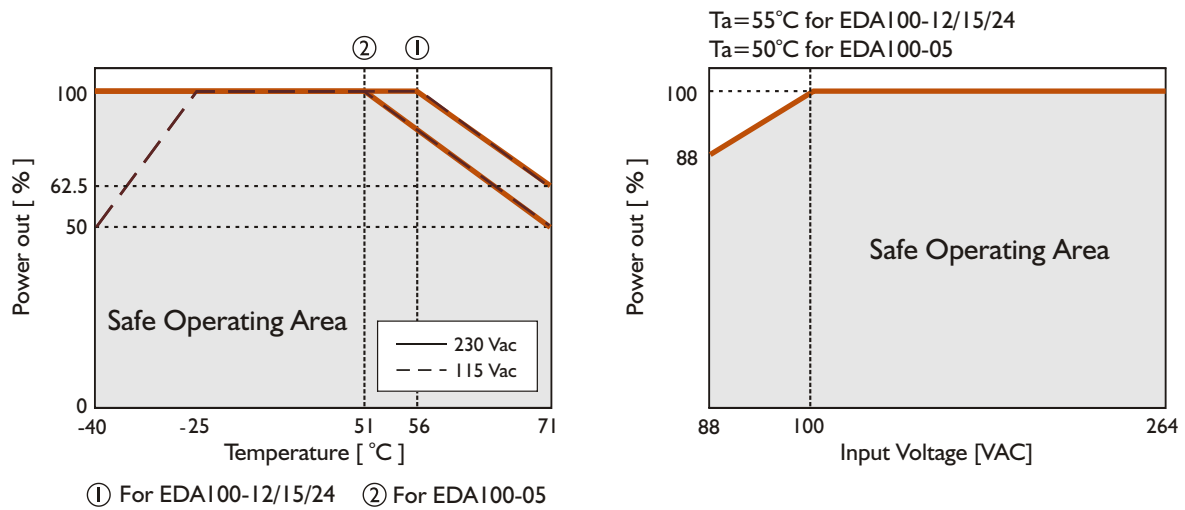

TYP. CURRENT LIMITED CURVE

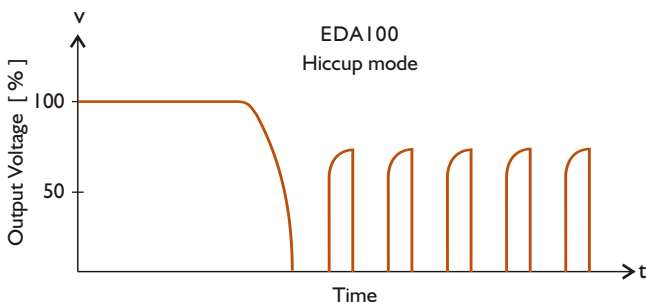

TYP. EFFICIENCY CURVE

