EM2785 Series
EuroMag Terminal Blocks
45° Entry; Screwless; Modular; 5.00 Centers




EM278505

SPECIFICATIONS

Rating: 8A, 300V
Center Spacing: 0.197" (5.00mm)
Wire Range: #14-22 AWG
Housing Material: UL rated 94V0 Thermoplastic
Contact Material: Tin-Plated Brass
Spring Material: Stainless Steel
Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.
Recommended PCB Hole Diameters: 0.051" (1.30mm)
Construction: Modular design features dovetails for interlocking to achieve longer lengths
Agency Information: c UL us File E62622; CE Certified

Dimensions - mm (in)

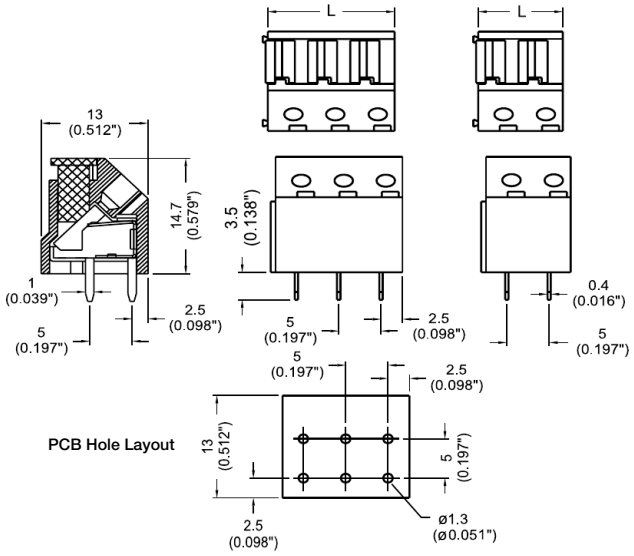

Poles	L (mm)	Poles	L (mm)
2	10.0	14	70.0
3	15.0	15	75.0
4	20.0	16	80.0
5	25.0	17	85.0
6	30.0	18	90.0
7	35.0	19	95.0
8	40.0	20	100.0
9	45.0	21	105.0
10	50.0	22	110.0
11	55.0	23	115.0
12	60.0	24	120.0
13	65.0		

To convert to inches, divide by 25.4

Part Numbering System

Series	# of Poles
EM2785	☐☐

02 to **24**