

**Models 6854  
XLR (F) 5-pin Rectangular Flanged Panel Mount**



Model 6854 XLR (F) 5-pin rectangular flanged mount

Protect contacts and absorb vibrations in your audio applications.

**Features**


- 3-pin XLR panel mount with sturdy all metal one piece design.
- Solder cup terminations.
- Low contact resistance.
- Front mountable.

**Materials**

- Housing is die cast zinc alloy with tarnish resistant nickel plating.
- Contacts are bronze with tin finish (Ground tab is steel).

**Ordering Information**

Model: 6854.

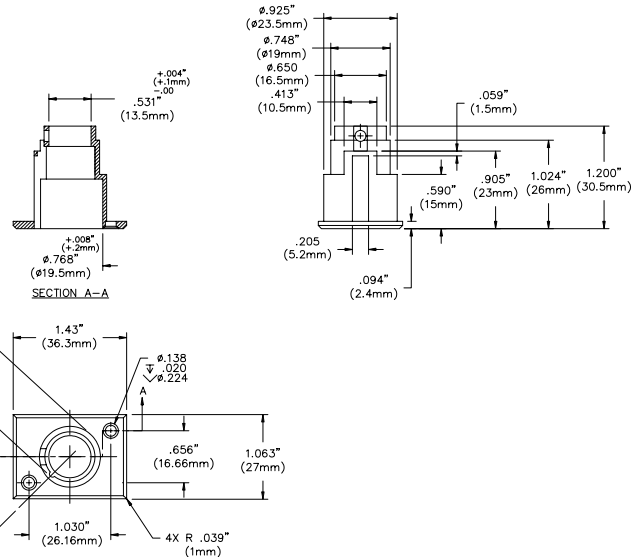

**Specifications**

|                     |                                    |
|---------------------|------------------------------------|
| Number of contacts  | 5                                  |
| Contact resistance  | < 5 mΩ                             |
| Dielectric strength | 1500 V dc                          |
| Wire size (AWG)     | 18 AWG (2.0 mm <sup>2</sup> ) max. |

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 International: 425-446-5500

e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ± .02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.