




X1049A

NPN SILICON TRANSISTOR

HIGH GAIN TRANSISTOR

■ FEATURES

- * $V_{CEV} = 80V$
- * High Gain
- * 20 Amps pulse current

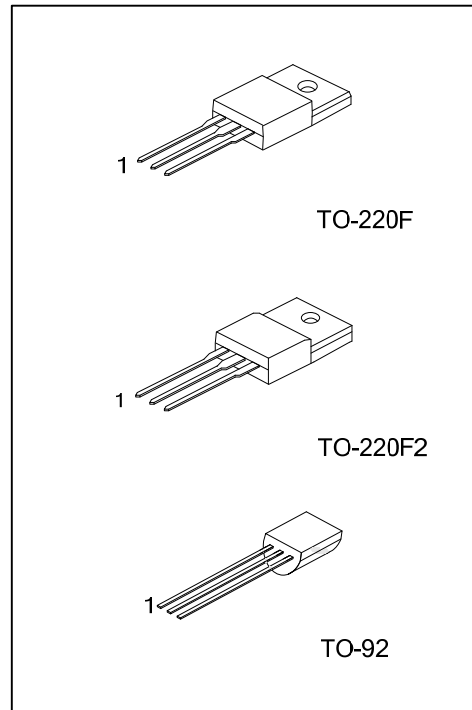

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
X1049AL-TF3-T	X1049AG-TF3-T	TO-220F	B	C	E	Tube
X1049AL-TF2-T	X1049AG-TF2-T	TO-220F2	B	C	E	Tube
X1049AL-T92-B	X1049AG-T92-B	TO-92	E	B	C	Tape Box
X1049AL-T92-K	X1049AG-T92-K	TO-92	E	B	C	Bulk

<p>X1049AL-TF3-T</p>	<p>(1) T: Tube, B: Tape Box, K: Bulk (2) TF3: TO-220F, TF2: TO-220F2, T92: TO-92 (3) L: Lead Free, G: Halogen Free</p>
----------------------	--

■ MARKING

TO-220F / TO-220F2	TO-92

■ ABSOLUTE MAXIMUM RATING ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V_{CBO}	80	V
Collector-Emitter Voltage		V_{CEO}	25	V
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current	DC	I_C	4	A
	Pulse		20	A
Base Current		I_B	500	mA
Power Dissipation ($T_A=25^\circ\text{C}$)	TO-220F	P_D	2	W
	TO-220F2		2.1	
	TO-92		1	
Junction Temperature		T_J	125	$^\circ\text{C}$
Operating Temperature		T_{OPR}	-20 ~ +85	$^\circ\text{C}$
Storage Temperature		T_{STG}	-40 ~ +150	$^\circ\text{C}$







Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)



PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	V_{CBO}	$I_C=100\mu\text{A}$	80	120		V
Collector-Emitter Breakdown Voltage	V_{CEO}	$I_C=10\text{mA}$	25	35		V
Collector-Emitter Breakdown Voltage	V_{CES}	$I_C=100\mu\text{A}$	80	120		V
Collector-Emitter Breakdown Voltage	V_{CEV}	$I_C=100\mu\text{A}, V_{EB}=1\text{V}$	80	120		V
Emitter-Base Breakdown Voltage	V_{EBO}	$I_E=100\mu\text{A}$	5	8.75		V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=50\text{V}$		0.3	10	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=4\text{V}$		0.3	10	nA
Collector Emitter Cut-Off Current	I_{CES}	$V_{CES}=50\text{V}$		0.3	10	nA
Collector-Emitter Saturation Voltage (Note)	$V_{CE(SAT)}$	$I_C=0.5\text{A}, I_B=10\text{mA}$		30	70	mV
		$I_C=1\text{A}, I_B=10\text{mA}$		60	130	
		$I_C=2\text{A}, I_B=10\text{mA}$		125	280	
		$I_C=4\text{A}, I_B=50\text{mA}$		155	400	
Base-Emitter Saturation Voltage (Note)	$V_{BE(SAT)}$	$I_C=4\text{A}, I_B=50\text{mA}$		890	980	mV
Base-Emitter Turn-On Voltage (Note)	$V_{BE(ON)}$	$I_C=4\text{A}, V_{CE}=2\text{V}$		820	920	mV
DC Current Gain (Note)	h_{FE}	$I_C=10\text{mA}, V_{CE}=2\text{V}$	250	430		
		$I_C=0.5\text{A}, V_{CE}=2\text{V}$	300	450		
		$I_C=1\text{A}, V_{CE}=2\text{V}$	300	450	1200	
		$I_C=4\text{A}, V_{CE}=2\text{V}$	200	350		
		$I_C=20\text{A}, V_{CE}=2\text{V}$	7			
Transition Frequency	f_T	$I_C=50\text{mA}, V_{CE}=10\text{V}, f=50\text{MHz}$		180		MHz
Output Capacitance	C_{OBO}	$V_{CB}=10\text{V}, f=1\text{MHz}$		45	60	pF
Turn-On Time	t_{ON}	$I_C=4\text{A}, I_B=40\text{mA}, V_{CC}=10\text{V}$		125		ns
Turn-Off Time	t_{OFF}	$I_C=4\text{A}, I_B=\pm 40\text{mA}, V_{CC}=10\text{V}$		380		ns

Note: Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

TYPICAL CHARACTERISTICS

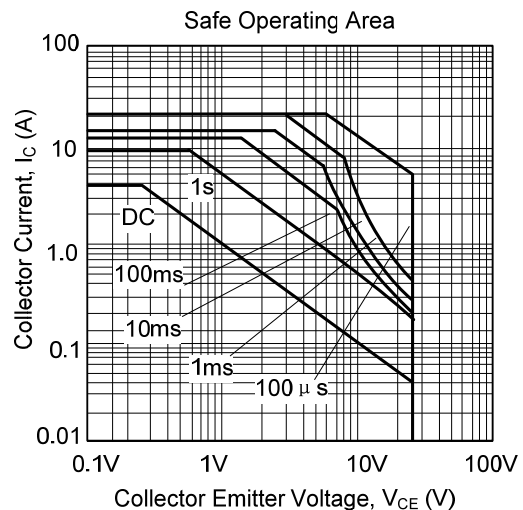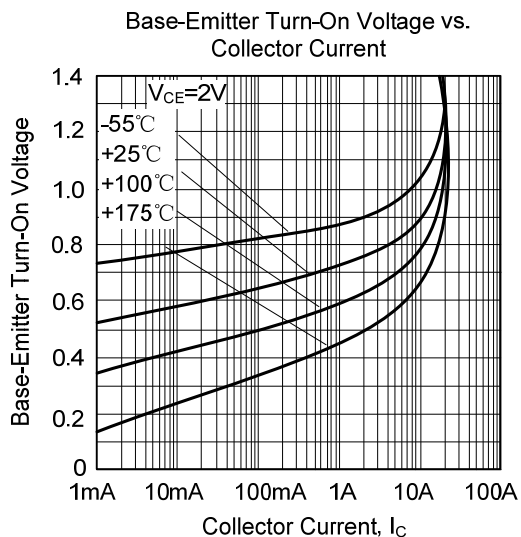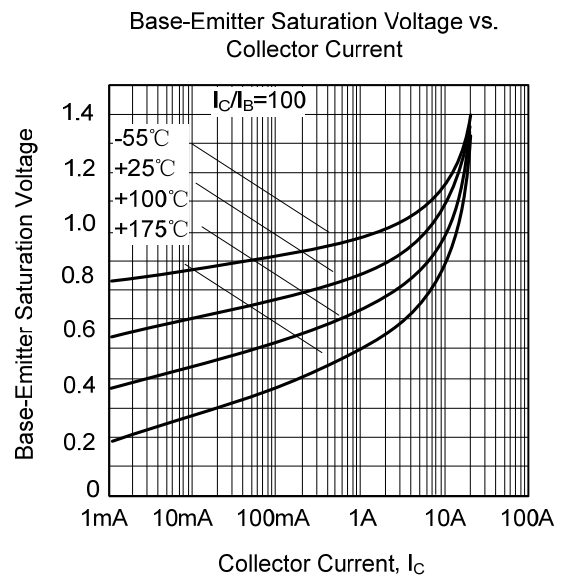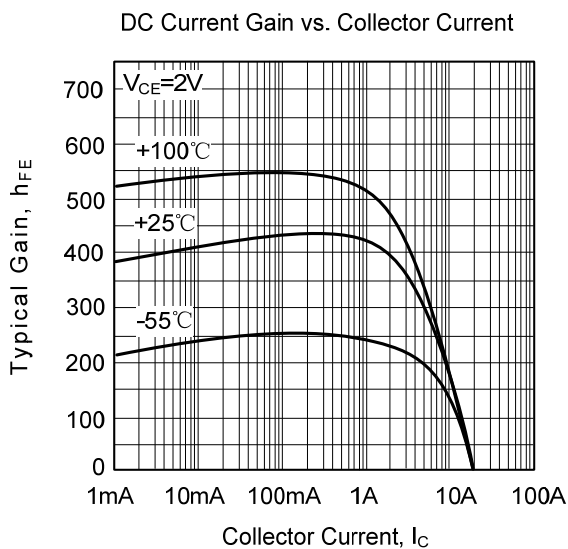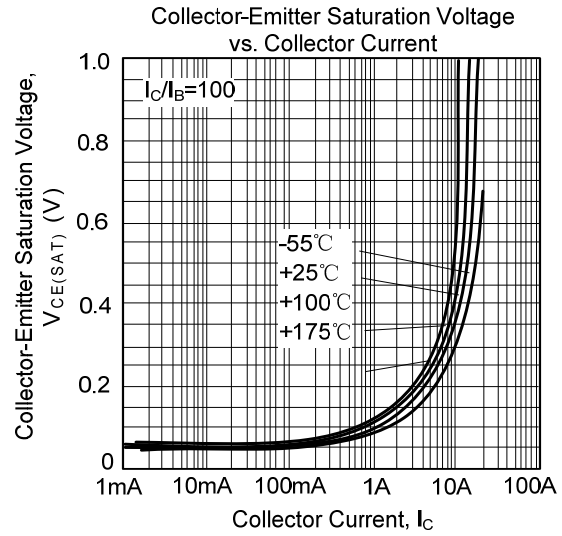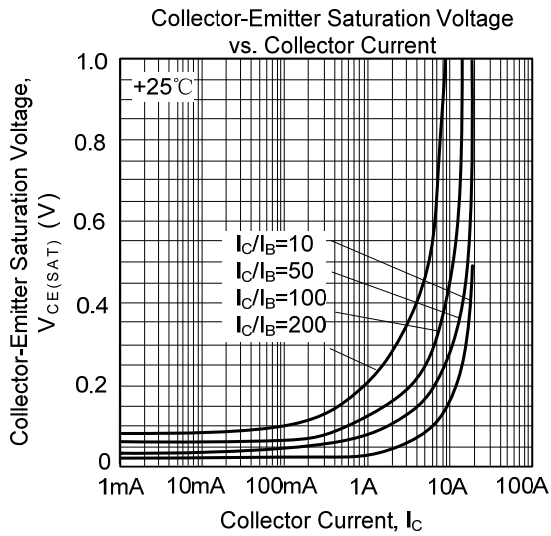

■ TYPICAL CHARACTERISTICS(Cont.)

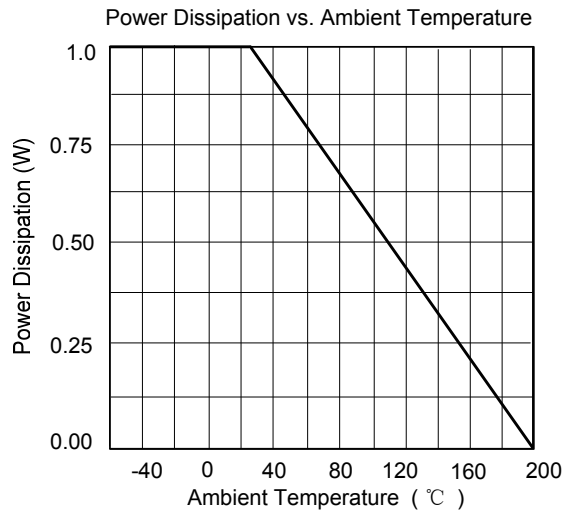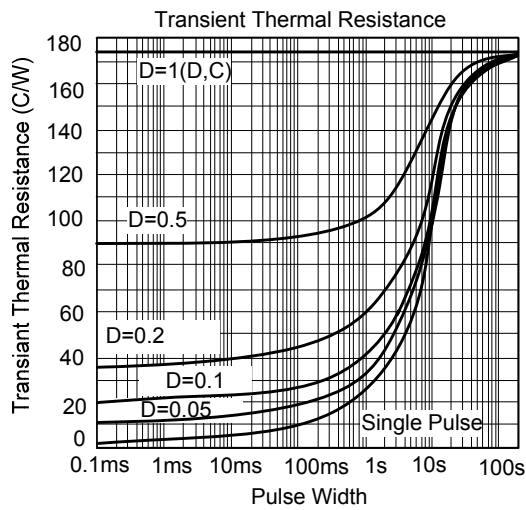

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.