FT6163/FT6163L

Ultra High Speed 8K x 9 Static Cmos Rams

FEATURES

- Full CMOS, 6T Cell
- High Speed (Equal Access and Cycle Times)
  - 25/35ns (Commercial)
  - 25/35/45ns (Military)
- Low Power Operation (Commercial/Military)
- Output Enable and Dual Chip Enable Control Functions
- Single 5V±10% Power Supply
- Data Retention with 2.0V Supply, 10 µA Typical Current (FT6163L Military)
- Common I/O
- Fully TTL Compatible Inputs and Outputs
- Standard Pinout (JEDEC Approved)
  - 28-Pin 300 mil DIP, SOJ
  - 28-Pin 350 x 550 mil LCC
  - 28-Pin CERPACK


DESCRIPTION

The FT6163 and FT6163L are 73,728-bit ultra high-speed static RAMs organised as 8K x 9. The CMOS memories require no clocks or refreshing and have equal access and cycle times. Inputs are fully TTL-compatible. The RAMs operate from a single 5V±10% tolerance power supply. With battery backup, data integrity is maintained for supply voltages down to 2.0V. Current drain is 10 µA from a 2.0V supply.


Access times as fast as 25 nanoseconds are available, permitting greatly enhanced system operating speeds. CMOS is used to reduce power consumption in both active and standby modes.

The FT6163 and FT6163L are available in 28-pin 300 mil DIP and SOJ, 28-pin 350 x 550 mil LCC, and 28-pin CERPACK packages providing excellent board level densities.

FUNCTIONAL BLOCK DIAGRAM

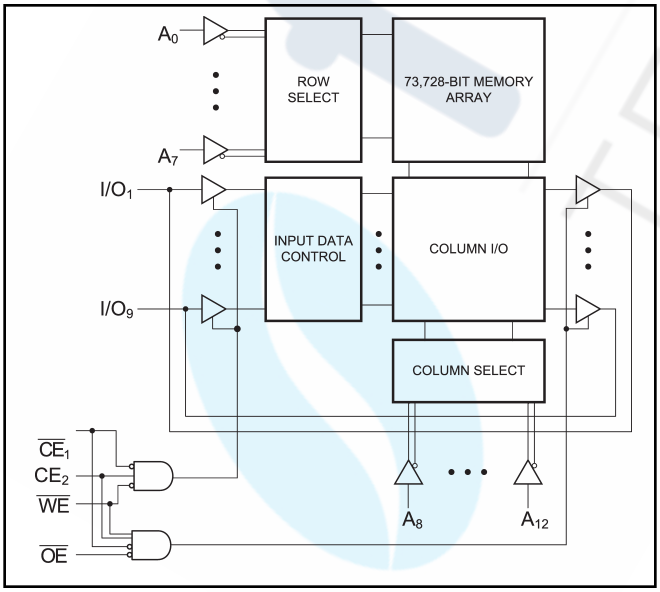

PIN CONFIGURATIONS

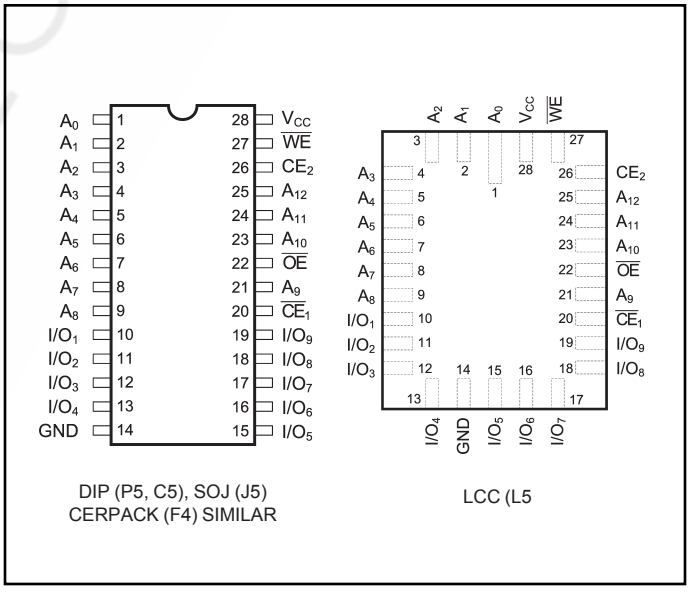

DIP (P5, C5), SOJ (J5)
CERPACK (F4) SIMILAR

LCC (L5

Download from alldatasheet.com

MAXIMUM RATINGS[1]

Symbol	Parameter	Value	Unit
V_{CC}	Power Supply Pin with Respect to GND	–0.5 to +7	V
V_{TERM}	Terminal Voltage with Respect to GND (up to 7.0V)	–0.5 to V_{CC} +0.5	V
T_A	Operating Temperature	–55 to +125	°C

Symbol	Parameter	Value	Unit
T_{BIAS}	Temperature Under Bias	–55 to +125	°C
T_{STG}	Storage Temperature	–65 to +150	°C
P_T	Power Dissipation	1.0	W
I_{OUT}	DC Output Current	50	mA

RECOMMENDED OPERATING TEMPERATURE AND SUPPLY VOLTAGE

Grade[2]	Ambient Temperature	GND	V_{CC}
Military	–55 to +125°C	0V	5.0V ± 10%

Grade[2]	Ambient Temperature	GND	V_{CC}
Commercial	0°C to +70°C	0V	5.0V ± 10%

DC ELECTRICAL CHARACTERISTICS

Over recommended operating temperature and supply voltage[2]

Symbol	Parameter	Test Conditions	FT6163		FT6163L		Unit
			Min	Max	Min	Max	
V_{IH}	Input High Voltage		2.2	V_{CC}+0.5	2.2	V_{CC}+0.5	V
V_{IL}	Input Low Voltage		–0.5[3]	0.8	–0.5[3]	0.8	V
V_{HC}	CMOS Input High Voltage		V_{CC}–0.2	V_{CC}+0.5	V_{CC}–0.2	V_{CC}+0.5	V
V_{LC}	CMOS Input Low Voltage		–0.5[3]	0.2	–0.5[3]	0.2	V
V_{CD}	Input Clamp Diode Voltage	V_{CC} = Min., I_{IN} = –18 mA		–1.2		–1.2	V
V_{OL}	Output Low Voltage (TTL Load)	I_{OL} = +8 mA, V_{CC} = Min.		0.4		0.4	V
V_{OLC}	Output Low Voltage (CMOS Load)	I_{OLC} = +100 µA, V_{CC} = Min.		0.2		0.2	V
V_{OH}	Output High Voltage (TTL Load)	I_{OH} = –4 mA, V_{CC} = Min.	2.4		2.4		V
V_{OHC}	Output High Voltage (CMOS Load)	I_{OHC} = –100 µA, V_{CC} = Min.	V_{CC}–0.2		V_{CC}–0.2		V
I_{LI}	Input Leakage Current	V_{CC} = Max., V_{IN} = GND to V_{CC} Mil. / Com'l.	–10 / –5	+10 / +5	–5 / N/A	+5 / N/A	µA
I_{LO}	Output Leakage Current	V_{CC} = Max., $\overline{CE}$ = V_{IH}, V_{OUT} = GND to V_{CC} Mil. / Com'l.	–10 / –5	+10 / +5	–5 / N/A	+5 / N/A	µA

CAPACITANCES[4]

(V_{CC} = 5.0V, T_A = 25°C, f = 1.0MHz)

Symbol	Parameter	Conditions	Typ.	Unit
C_{IN}	Input Capacitance	V_{IN} = 0V	5	pF

Symbol	Parameter	Conditions	Typ.	Unit
C_{OUT}	Output Capacitance	V_{OUT} = 0V	7	pF

Notes:

1. Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to MAXIMUM rating conditions for extended periods may affect reliability.
2. Extended temperature operation guaranteed with 400 linear feet per minute of air flow.
3. Transient inputs with V_{IL} and I_{IL} not more negative than –3.0V and –100mA, respectively, are permissible for pulse widths up to 20 ns.
4. This parameter is sampled and not 100% tested.

Download from alldatasheet.com

POWER DISSIPATION CHARACTERISTICS

Over recommended operating temperature and supply voltage(2)

Symbol	Parameter	Test Conditions		FT6163 Min	FT6163 Max	FT6163L Min	FT6163L Max	Unit
I_{CC}	Dynamic Operating Current – 25	V_{CC} = Max., f = Max., Outputs Open	Mil.	—	145	—	145	mA
			Com'l.	—	125	—	N/A	
I_{CC}	Dynamic Operating Current – 35, 45	V_{CC} = Max., f = Max., Outputs Open	Mil.	—	120	—	120	mA
			Com'l.	—	95	—	N/A	
I_{SB}	Standby Power Supply Current (TTL Input Levels)	$\overline{CE_1} \geq V_{IH}$ or $CE_2 \leq V_{IL}$, V_{CC} = Max., f = Max., Outputs Open	Mil.	—	40	—	40	mA
			Com'l.	—	35	—	N/A	
I_{SB1}	Standby Power Supply Current (CMOS Input Levels)	$\overline{CE_1} \geq V_{HC}$ or $CE_2 \leq V_{LC}$, V_{CC} = Max., f = 0, Outputs Open, $V_{IN} \leq V_{LC}$ or $V_{IN} \geq V_{HC}$	Mil.	—	20	—	1	mA
			Com'l.	—	18	—	N/A	


n/a = Not Applicable

DATA RETENTION CHARACTERISTICS (FT6163L, Military Temperature Only)

Symbol	Parameter	Test Condition	Min	Typ.* V_{CC}= 2.0V	Typ.* V_{CC}= 3.0V	Max V_{CC}= 2.0V	Max V_{CC}= 3.0V	Unit
V_{DR}	V_{CC} for Data Retention	$\overline{CE_1} \geq V_{CC}$ – 0.2V or $CE_2 \leq 0.2V$, $V_{IN} \geq V_{CC}$ – 0.2V or $V_{IN} \leq 0.2V$	2.0					V
I_{CCDR}	Data Retention Current			10	15	200	300	µA
t_{CDR}	Chip Deselect to Data Retention Time		0					ns
t_R†	Operation Recovery Time		t_{RC}§					ns

*T_A = +25°C
§t_{RC} = Read Cycle Time
†This parameter is guaranteed but not tested.

DATA RETENTION WAVEFORM

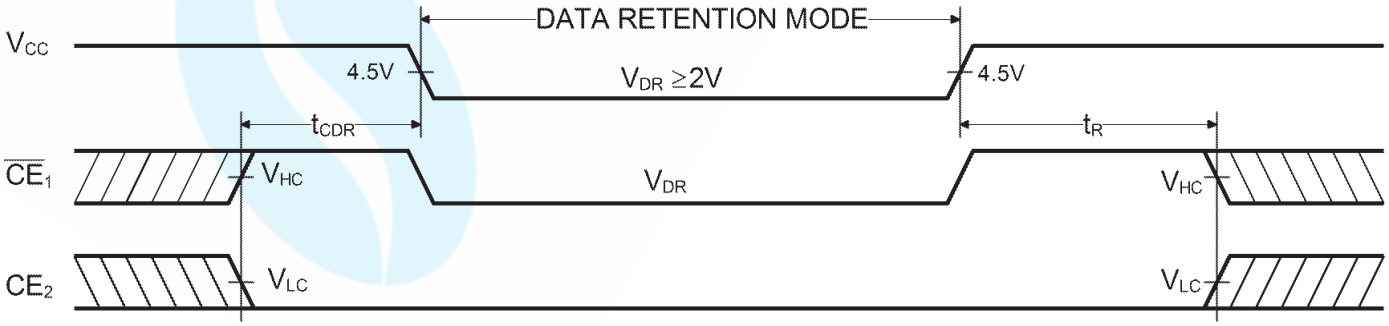


Download from alldatasheet.com

AC ELECTRICAL CHARACTERISTICS—READ CYCLE

(V_{CC} = 5V ± 10%, All Temperature Ranges)[2]

Symbol	Parameter	-25		-35		-45		Unit
		Min	Max	Min	Max	Min	Max	
t_{RC}	Read Cycle Time	25		35		45		ns
t_{AA}	Address Access Time		25		35		45	ns
t_{AC}	Chip Enable Access Time		25		35		45	ns
t_{OH}	Output Hold from Address Change	3		3		3		ns
t_{LZ}	Chip Enable to Output in Low Z	3		3		3		ns
t_{HZ}	Chip Disable to Output in High Z		10		15		20	ns
t_{OE}	Output Enable Low to Data Valid		13		18		20	ns
t_{OLZ}	Output Enable Low to Low Z	3		3		3		ns
t_{OHZ}	Output Enable High to High Z		12		15		20	ns
t_{PU}	Chip Enable to Power Up Time	0		0		0		ns
t_{PD}	Chip Disable to Power Down Time		20		20		25	ns


READ CYCLE NO. 1 ($\overline{OE}$ CONTROLLED)[5]

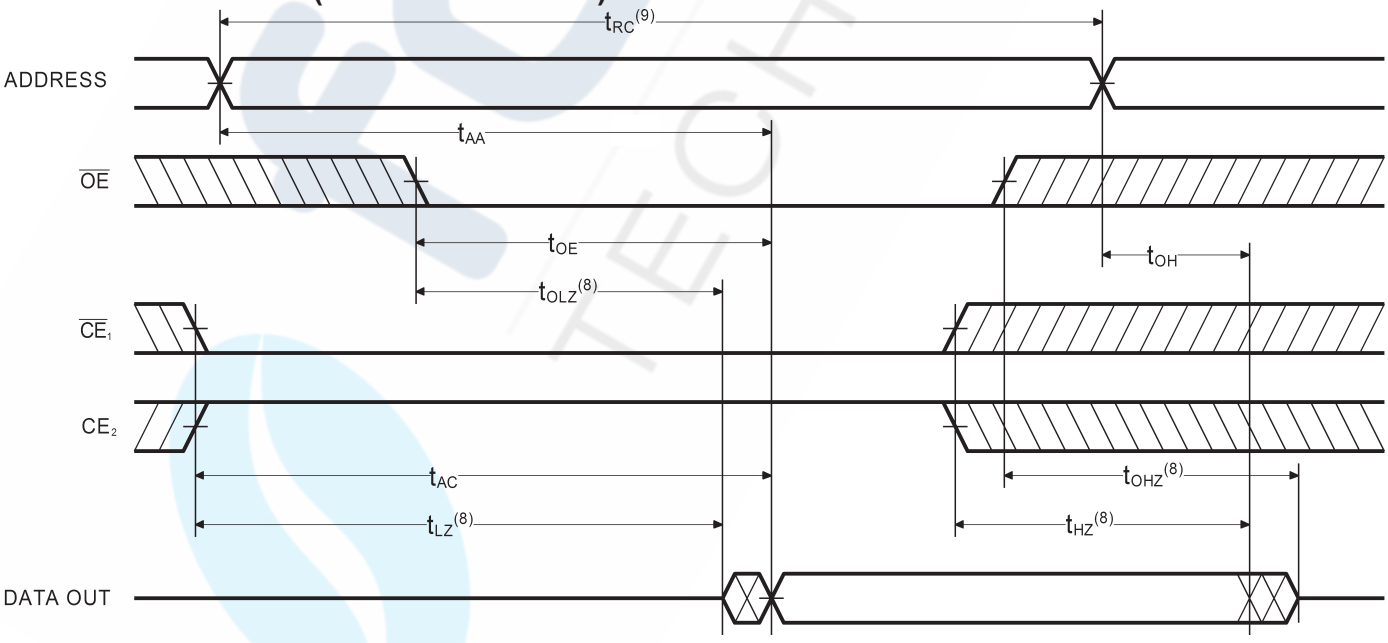


Notes:
5. $\overline{WE}$ is HIGH for READ cycle.
6. $\overline{CE}_1$ is LOW, CE_2 is HIGH and $\overline{OE}$ is LOW for READ cycle.
7. ADDRESS must be valid prior to, or coincident with $\overline{CE}_1$ transition LOW and CE_2 transition HIGH.
8. Transition is measured ± 200mV from steady state voltage prior to change, with loading as specified in Figure 1. This parameter is sampled and not 100% tested.

Download from alldatasheet.com

READ CYCLE NO. 2 (ADDRESS CONTROLLED)[5,6]

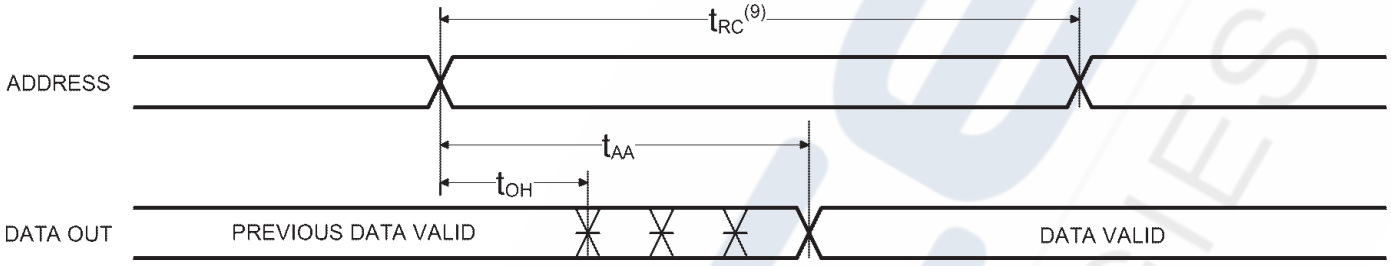

READ CYCLE NO. 3 ($\overline{CE}_1$, CE_2 CONTROLLED)[5,7,10]

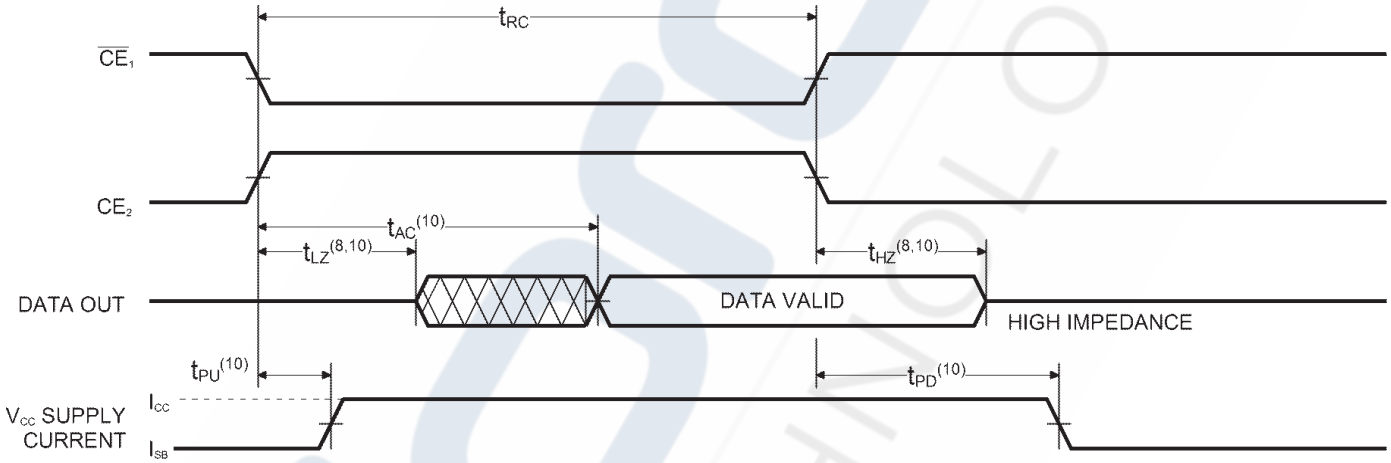

Notes:

9. READ Cycle Time is measured from the last valid address to the first transitioning address.
10. Transitions caused by a chip enable control have similar delays irrespective of whether $\overline{CE}_1$ or CE_2 causes them.


Download from alldatasheet.com

AC CHARACTERISTICS—WRITE CYCLE

(V_{CC} = 5V ± 10%, All Temperature Ranges)[2]

Symbol	Parameter	-25		-35		-45		Unit
		Min	Max	Min	Max	Min	Max	
t_{WC}	Write Cycle Time	25		35		45		ns
t_{CW}	Chip Enable Time to End of Write	18		25		33		ns
t_{AW}	Address Valid to End of Write	18		25		33		ns
t_{AS}	Address Set-up Time	0		0		0		ns
t_{WP}	Write Pulse Width	18		20		25		ns
t_{AH}	Address Hold Time	0		0		0		ns
t_{DW}	Data Valid to End of Write	13		15		20		ns
t_{DH}	Data Hold Time	0		0		0		ns
t_{WZ}	Write Enable to Output in High Z		10		14		18	ns
t_{OW}	Output Active from End of Write	3		5		5		ns

WRITE CYCLE NO. 1 ($\overline{WE}$ CONTROLLED)[11]

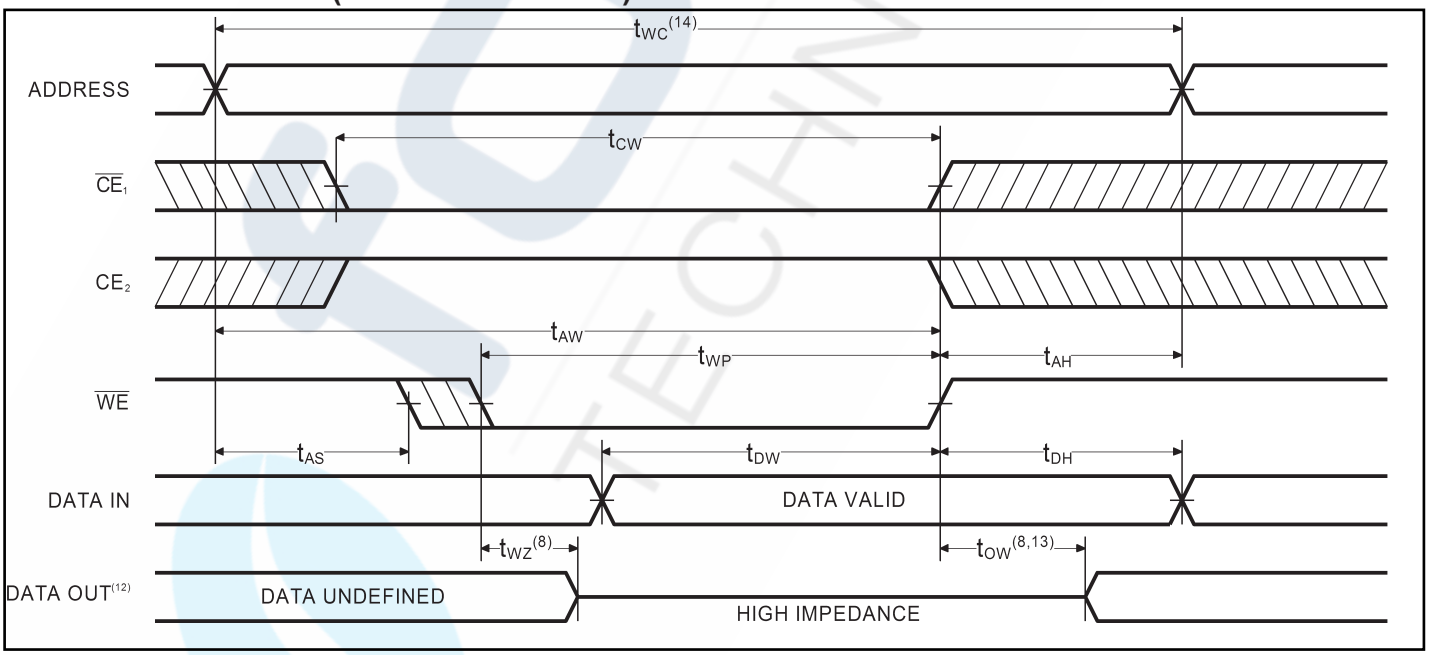


Notes:

11. $\overline{CE}_1$ and $\overline{WE}$ must be LOW, and CE_2 HIGH for WRITE cycle.
12. $\overline{OE}$ is LOW for this WRITE cycle to show t_{WZ} and t_{OW}.
13. If $\overline{CE}_1$ goes HIGH, or CE_2 goes LOW, simultaneously with $\overline{WE}$ HIGH, the output remains in a low impedance state.
14. Write Cycle Time is measured from the last valid address to the first transitioning address.

Download from alldatasheet.com

TIMING WAVEFORM OF WRITE CYCLE NO. 2 ($\overline{CE}$ CONTROLLED)(11)

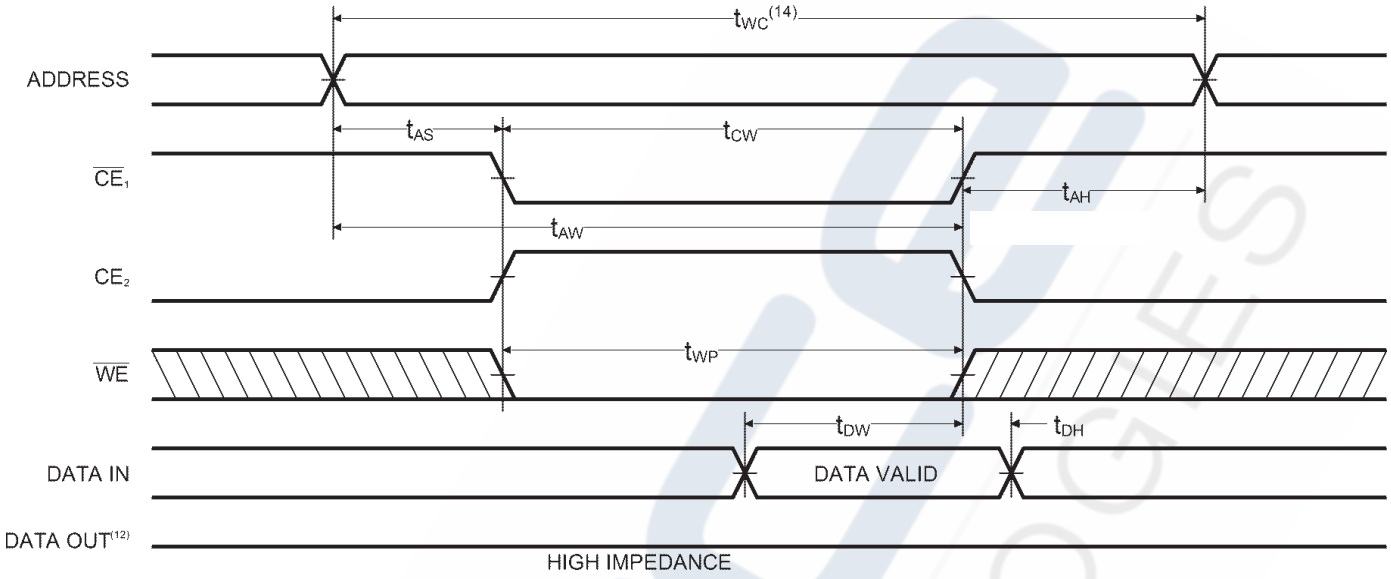

AC TEST CONDITIONS

Input Pulse Levels	GND to 3.0V
Input Rise and Fall Times	3ns
Input Timing Reference Level	1.5V
Output Timing Reference Level	1.5V
Output Load	See Figures 1 and 2

TRUTH TABLE

Mode	$\overline{CE_1}$	CE_2	$\overline{OE}$	$\overline{WE}$	I/O	Power
Standby	H	X	X	X	High Z	Standby
Standby	X	L	X	X	High Z	Standby
D_{OUT} Disabled	L	H	H	H	High Z	Active
Read	L	H	L	H	D_{OUT}	Active
Write	L	H	X	L	D_{IN}	Active

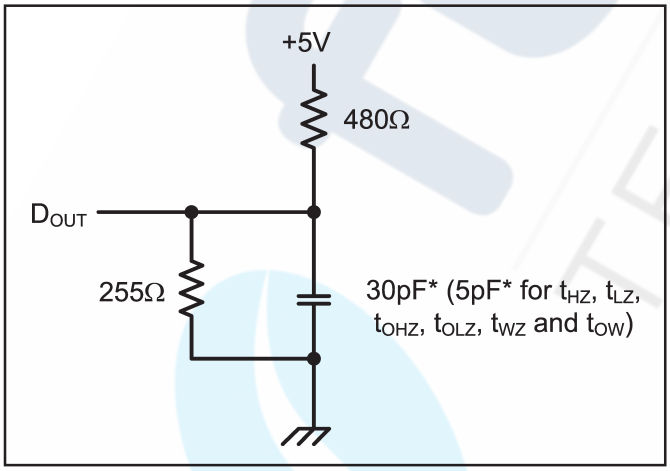


Figure 1. Output Load

* including scope and test fixture.


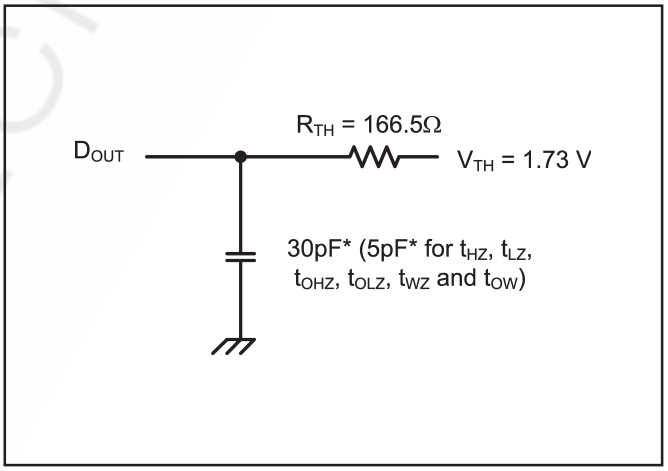


Figure 2. Thevenin Equivalent

Note:
Because of the ultra-high speed of the FT6163/L, care must be taken when testing this device; an inadequate setup can cause a normal functioning part to be rejected as faulty. Long high-inductance leads that cause supply bounce must be avoided by bringing the V_{CC} and ground planes directly up to the contactor fingers. A 0.01 µF high frequency capacitor is also required between V_{CC} and ground. To avoid signal reflections, proper termination must be used; for example, a 50Ω test environment should be terminated into a 50Ω load with 1.73V (Thevenin Voltage) at the comparator input, and a 116Ω resistor must be used in series with D_{OUT} to match 166Ω (Thevenin Resistance).

Download from alldatasheet.com

ORDERING INFORMATION

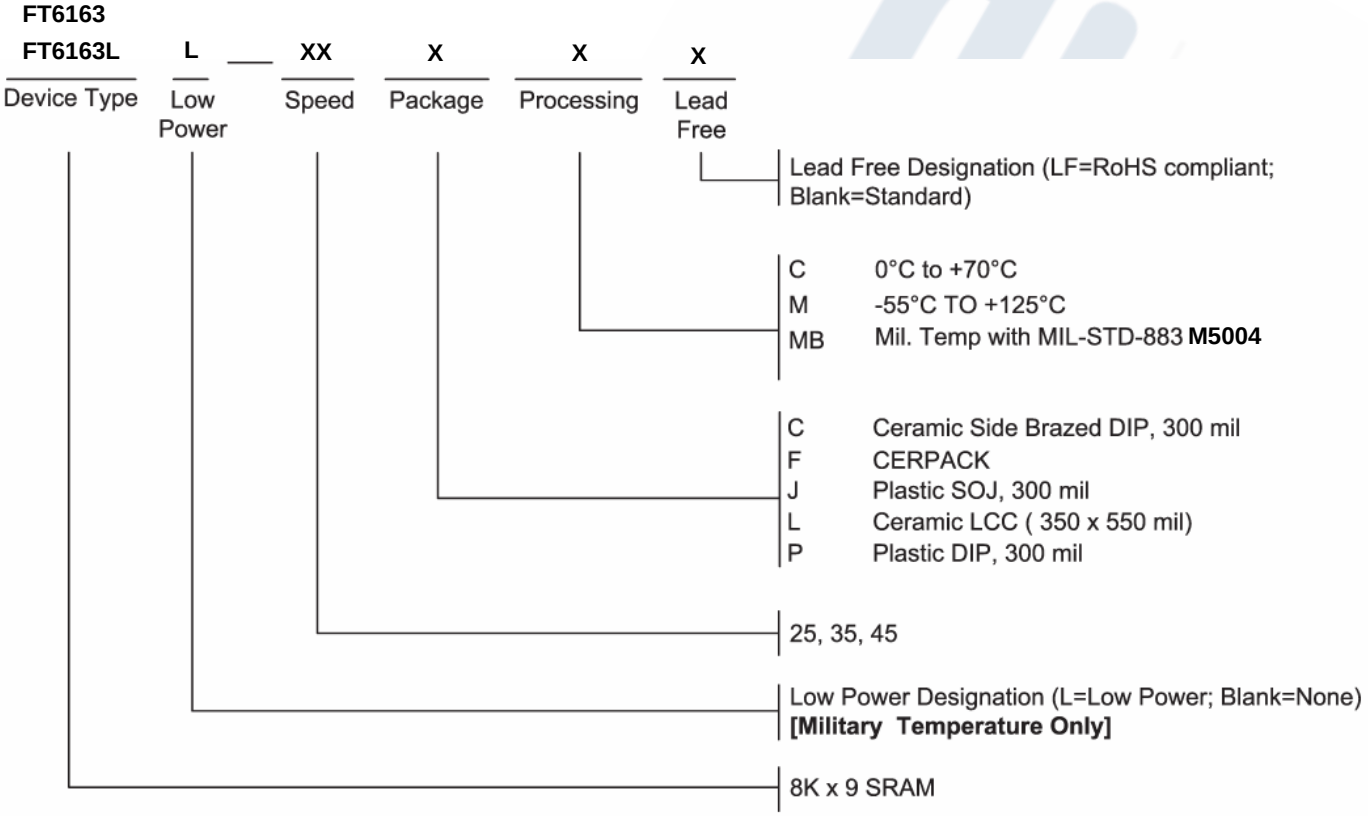

SELECTION GUIDE

The FT6163/L is available in the following temperature, speed and package options. The FT6163L is only available over the military temperature range.


Temperature Range	Package	Speed		
		25	35	45
Commercial	Plastic DIP	-25PC	-35PC	N/A
	Plastic SOJ	-25JC	-35JC	N/A
Miliitary Temperature	Side Brazed DIP	-25CM	-35CM	-45CM
	LCC	-25LM	-35LM	-45LM
	CERPACK	-25FM	-35FM	-45FM
Military Processed*	Side Brazed DIP	-25CMB	-35CMB	-45CMB
	LCC	-25LMB	-35LMB	-45LMB
	CERPACK	-25FMB	-35FMB	-45FMB

* Military temperature range with MIL-STD-883 M5004
N/A = Not available

Download from alldatasheet.com


Pkg #	J5	
# Pins	28 (300 mil)	
Symbol	**Min**	**Max**
A	0.120	0.148
A1	0.078	-
b	0.014	0.020
C	0.007	0.011
D	0.700	0.730
e	0.050 BSC	
E	0.335 BSC	
E1	0.292	0.300
E2	0.267 BSC	
Q	0.025	-

SOJ SMALL OUTLINE IC PACKAGE

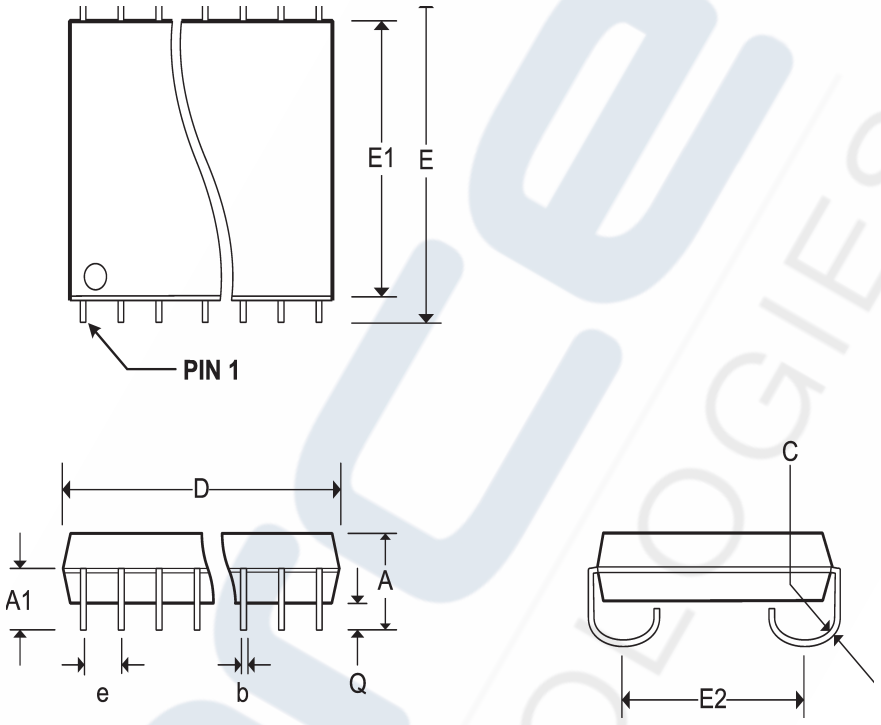

Pkg #	L5	
# Pins	28	
Symbol	**Min**	**Max**
A	0.060	0.075
A1	0.050	0.065
B1	0.022	0.028
D	0.342	0.358
D1	0.200 BSC	
D2	0.100 BSC	
D3	-	0.358
E	0.540	0.560
E1	0.400 BSC	
E2	0.200 BSC	
E3	-	0.558
e	0.050 BSC	
h	0.040 REF	
j	0.020 REF	
L	0.045	0.055
L1	0.045	0.055
L2	0.075	0.095
ND	5	
NE	9	


RECTANGULAR LEADLESS CHIP CARRIER

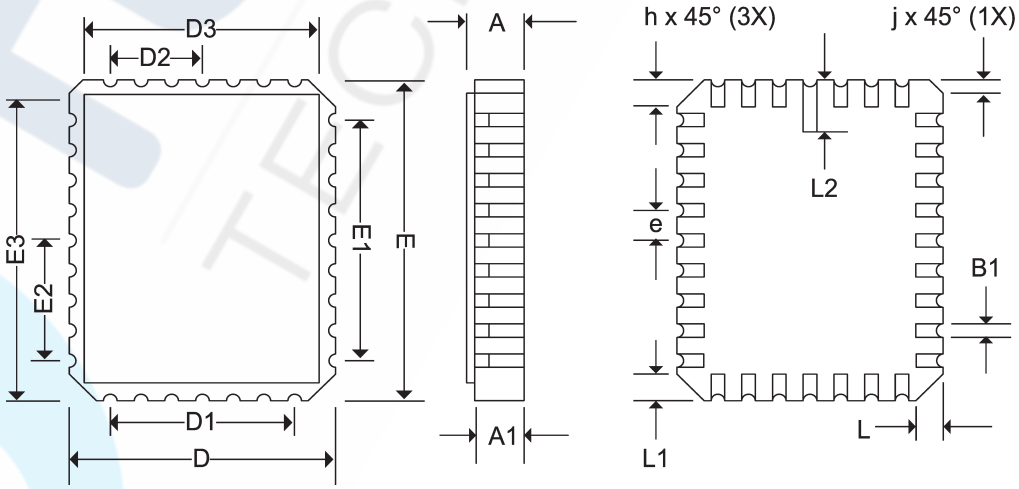

Download from alldatasheet.com


Pkg #	C5	
# Pins	28 (300 mil)	
Symbol	Min	Max
A	-	0.225
b	0.014	0.026
b2	0.045	0.065
C	0.008	0.018
D	-	1.485
E	0.240	0.310
eA	0.300 BSC	
e	0.100 BSC	
L	0.125	0.200
Q	0.015	0.070
S1	0.005	-
S2	0.005	-

SIDE BRAZED DUAL IN-LINE PACKAGE

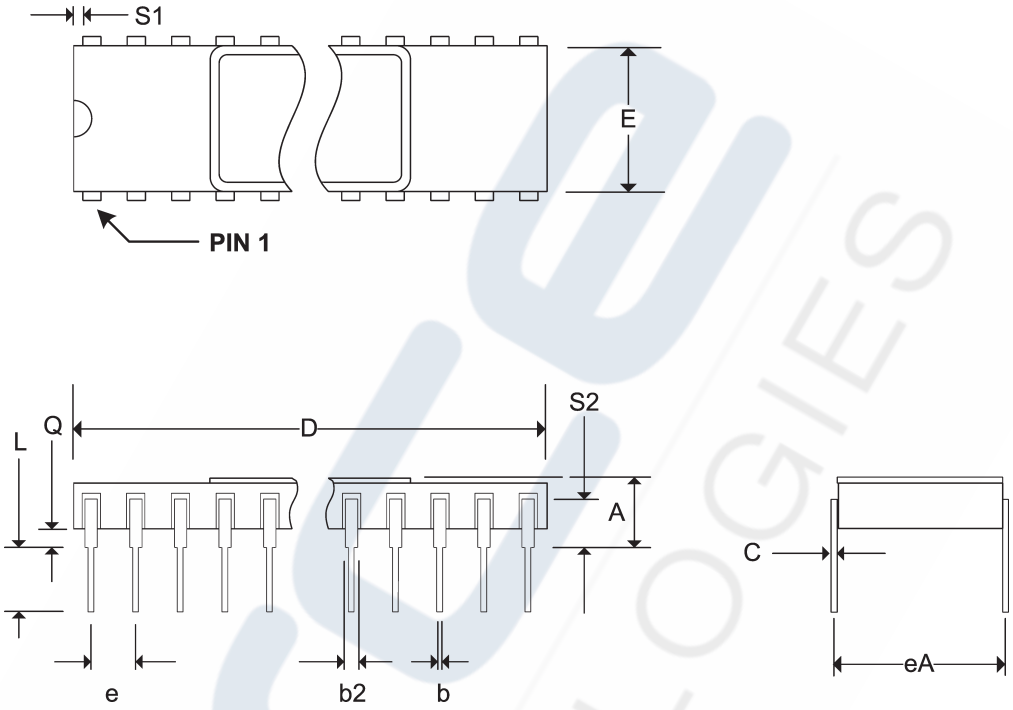

Pkg #	F4	
# Pins	28	
Symbol	Min	Max
A	0.060	0.090
b	0.015	0.022
c	0.004	0.009
D	-	0.730
E	0.330	0.380
e	0.050 BSC	
k	0.005	0.018
L	0.250	0.370
Q	0.026	0.045
S	-	0.085
S1	0.005	-


CERPACK CERAMIC FLAT PACKAGE

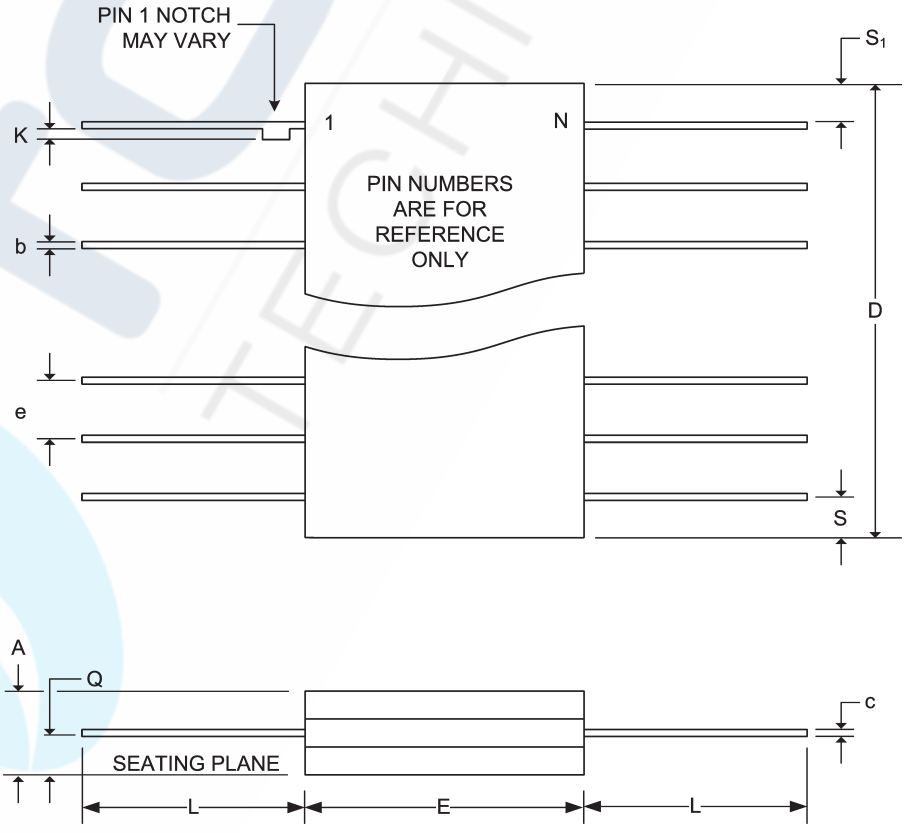

Download from alldatasheet.com

Pkg #	P5	
# Pins	28 (300 mil)	
Symbol	**Min**	**Max**
A	-	0.210
A1		-
b	0.014	0.023
b2	0.045	0.070
C	0.008	0.014
D	1.345	1.400
E1	0.270	0.300
E	0.300	0.380
e	0.100 BSC	
eB	-	0.430
L	0.115	0.150
α	0°	15°

PLASTIC DUAL IN-LINE PACKAGE

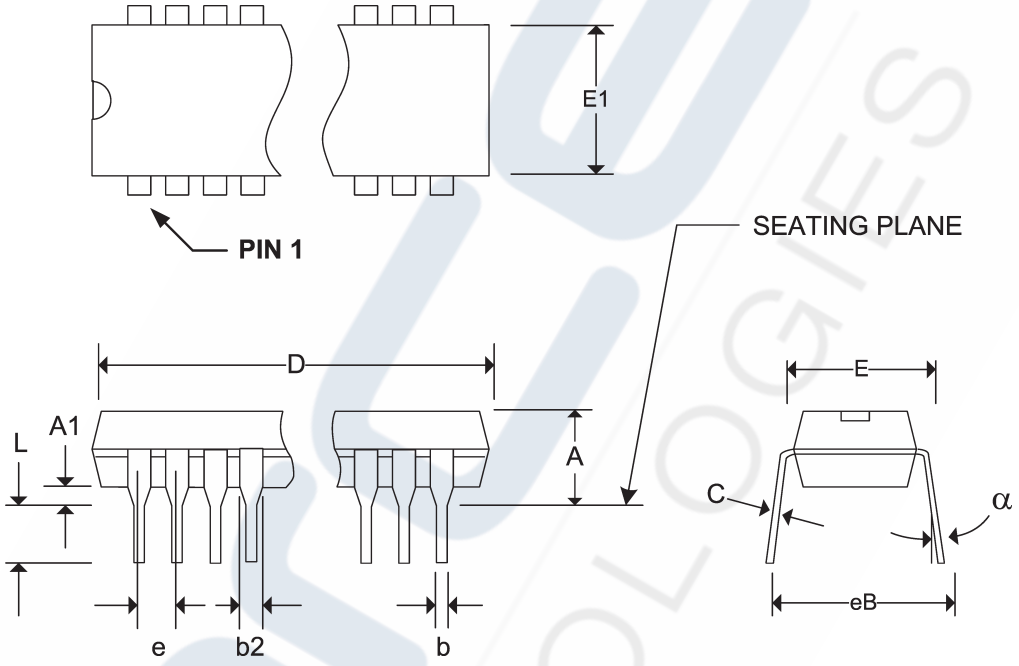

Download from alldatasheet.com

REVISIONS

DOCUMENT NUMBER: SRAM120
DOCUMENT TITLE: FT6163/FT6163L ULTRA HIGH SPEED 8K x 9 STATIC CMOS RAMS

REV.	ISSUE DATE	ORIG. OF CHANGE	DESCRIPTION OF CHANGE
ORIG	1997	M.S	New Data Sheet
1	Oct-05	M.S	Change logo to Pyramid
1.1	Jul-06	M.S	Added Lead-Free Designation
1.2	June-08	M.S	Updated SOJ package information and data sheet review

Download from alldatasheet.com

Ashley Crt, Henley,
Marlborough, Wilts, SN8 3RH UK
Tel: +44(0)1264 731200
Fax:+44(0)1264 731444
E-mail
sales@forcetechnologies.co.uk

www.forcetechnologies.co.uk

Unless otherwise stated in this SCD/Data sheet , Force Technologies Ltd reserve the right to make changes, without notice, in the products, Includ -ing circuits, cells and/or software, described or contained herein in order to improve design and/or performance. Force Technologies resumes no responsibility or liability for the use of any of these products, conveys no licence or any title under patent, copyright, or mask work to these products, and makes no representation or warranties that that these products are free f rom patent, copyright or mask work infringement, unless otherwise specified.

Life Support Applications
Force Technologies products are not designed for use in life support appliances, devices or systems where malfunction of a Force Technologies product can reasonably be expected to result in a personal injury. Force Technologies customers using or selling Force Technologies products for use in such applications do so at their own risk and agree to fully indemnify Force Technologies for any damages resulting from such improper use or sale.

All trademarks acknowledged

Copyright Force Technologies Ltd 2010

Download from alldatasheet.com