

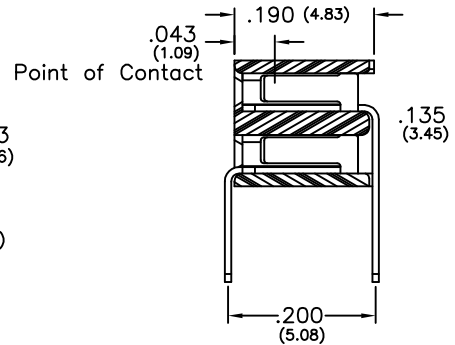
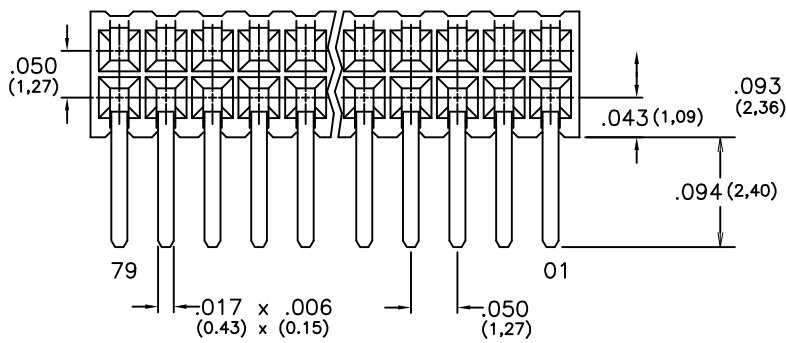
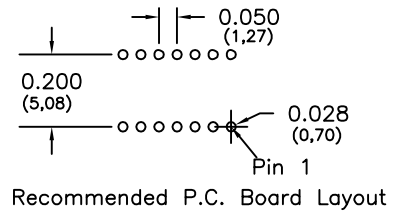


Major League Electronics .050x.050 cl Socket Strips

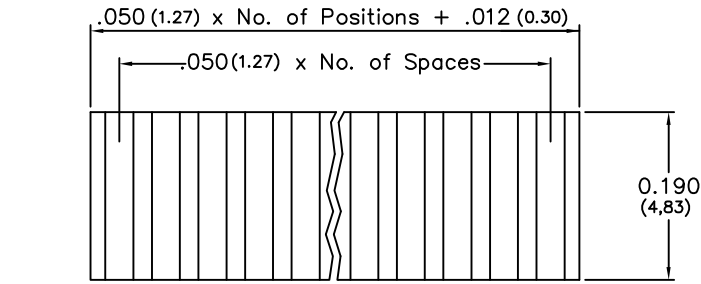

Tails may be clipped to achieve desired pin length

Ordering Information

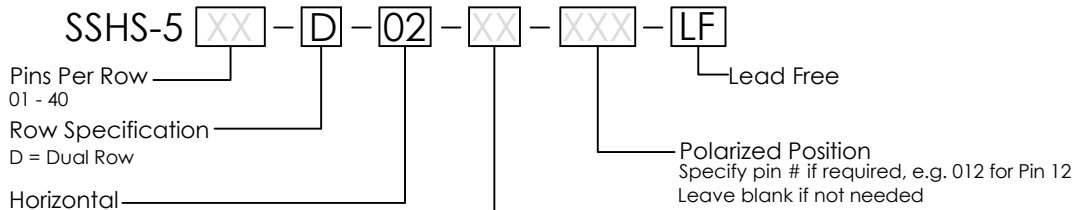


Specifications

Insertion Depth: .095 (2.41) Minimum
 Insertion Force - Per Contact - H Plating:
 3.8oz. (1.05N) avg. with .016 (0.41) sq. pin
 Withdrawal Force - Per Contact - H Plating:
 2.0 oz. (0.56N) avg. with 0.16 (0.41) sq. pin
 Current Rating: 1.5 Ampere
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20 mΩ Max.
 Operating Temperature: -40°C to + 105°C
 Max. Process Temperature:
 Peak: 260°C up to 10 secs.
 Process: 230°C up to 60 secs.
 Wave: 260°C up to 6 secs.
 Reflow: 260°C up to 10 secs.
 Manual Solder: 350°C up to 5 secs.

Plating Options	
G	10μ Gold on Contact Area / Flash on Tail
T	Matte Tin All Over
GT	10μ Gold on Contact Area / Matte Tin on Tail
H	30μ Gold on Contact Area / Matte Tin on Tail
F	Gold Flash over Entire Pin

Materials

Contact Material: Phosphor Bronze
 Insulator Material: Nylon 6T
 Plating: Au or Sn over 50μ" (1.27) Ni



Mates with:
 BSTC,
 BSTCM,
 BSTS,
 TBSTC,
 TBSTCM,
 TBSTS,
 TSHC,
 TSHR,
 TSHS,
 TSHSCM,
 TTSHC,
 TTSHR,
 TTSHS,
 TTSHSM

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

SSHS-5-D-02 SERIES

.050x.050 cl Dual Row
 Socket Strips

12 FEB 07

Scale
 NTS

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS IN INCHES (MM)
 TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
 TWO PLACE DECIMALS ±.010
 THREE PLACE DECIMALS ±.005
 FOUR PLACE DECIMALS ±.0020



4235 Earnings Way, New Albany, Indiana, 47150, USA
 1-800-782-3486 (USA/Canada/Mexico)
 Tel: 812-944-7244
 Fax: 812-944-7268
 E-mail: mle@mlelectronics.com
 Web: www.mlelectronics.com

Edition
 1

Sheet
 1/1