


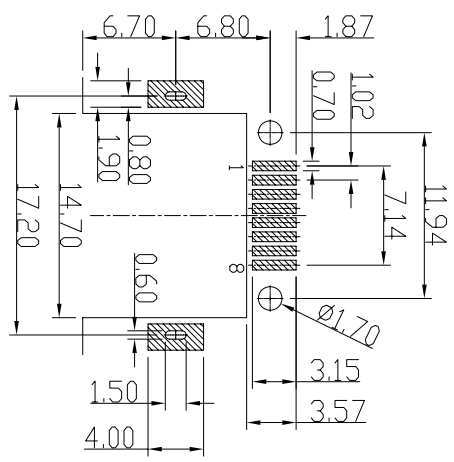




CATEGORY	DESCRIPTION	P/N #
CONNECTOR	MU45 SMT 沉板 H=5.5mm 塑胶有破孔	MU88-XX11-XRVS1-X

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	XSY	2014.12.25
A02	—	增加塑胶颜色及包装方式选项	XSY	2018.06.27

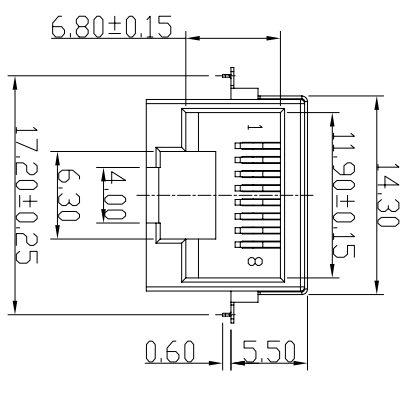

- SPECIFICATIONS:
1. Voltage: 150V AC RMS
  2. Current Rating: 1.5A
  3. Contact Resistance: 40mΩ MAX.
  4. Insulation Resistance: 500MΩ MIN.
  5. Dielectric Withstand Voltage :1000V AC
  6. Operate Temperature: -40°C~80°C
  7. Durability: 750 Mating Cycles MIN.

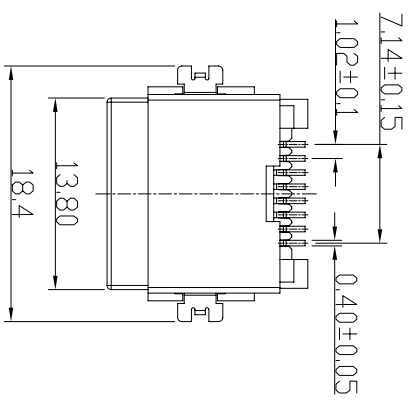

Recommend PCB Layout  
 Lock Top View  
 Tolerance: ±0.05mm

TABLE


X	Terminal Plating
B	LCP BLACK
W	PA9T WHITE

Plating

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

包装方式

X	卷带包装
C	吸塑盒包装
P	吸塑盒包装

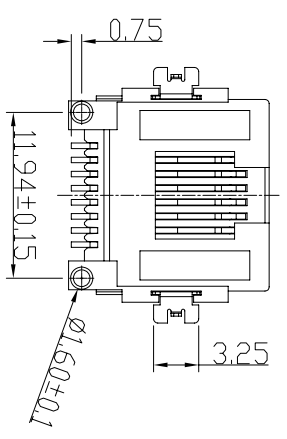

TABLE

X	Terminal Plating
B	LCP BLACK
W	PA9T WHITE

包装方式

X	卷带包装
C	吸塑盒包装
P	吸塑盒包装

東莞市合陵電子有限公司  
 DongGuan Heling Electronic Co.,LTD

UNLESS OTHERWISE SPECIFIED TOLERANCES

SCALE: 1/1	UNIT: mm	DWG. NO:
SIZE: A3	PAGE: 1 OF 1	WI-061-023

c	SHELL	1	BRASS T=0.2mm	NI PLATING	
b	TERMINAL	8	PHOSPHOR BRONZE	Au/Tin PLATING	
a	HOUSING	1	SEE TABLE	SEE TABLE	
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark

DECIMALS: ANGLES:

X	:±0.5	X	:±2°
X.X	:±0.3	X.X	:±1'
X.XX	:±0.2		

APPROVED BY: XSY

CHECKED BY: XSY

PREPARED BY: XSY

CUSTOMER COPY