
PUMT1

PNP SILICON TRANSISTOR

PNP GENERAL PURPOSE DUAL TRANSISTOR



SOT-363

■ DESCRIPTION

Two independently operating PNP transistors.


■ FEATURES

* Low Current (Max. -100mA)
* Low Voltage (Max. -40V)
* Reduces Number of Components and Board Space.
* Complement to PUMX1.

■ APPLICATIONS

*General Purpose Switching and Amplification.

■ EQUIVALENT CIRCUIT




■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment						Packing
Lead Free	Halogen Free		1	2	3	4	5	6	
PUMT1L-AL6-R	PUMT1G-AL6-R	SOT-363	E1	B1	C2	E2	B2	C1	Tape Reel

PUMT1L-AL6-R
(1)Packing Type
(2)Package Type
(3)Lead Free

(1) R: Tape Reel
(2) AL6: SOT-363
(3) G: Halogen Free, L: Lead Free

■ MARKING

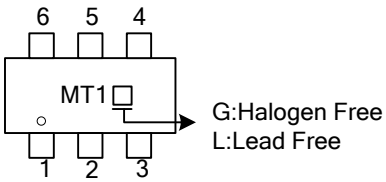

Copyright © 2011 Unisonic Technologies Co., Ltd

The following characteristics apply to both TR1 and TR2.

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-50	V
Collector-Emitter Voltage	V_{CEO}	-40	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current (DC)	I_C	-100	mA
Peak Collector Current	I_{CM}	-200	mA
Peak Base Current	I_{BM}	-200	mA
Collector Power Dissipation	P_C	300	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C)

PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Collector Cut-Off Current	I_{CBO}	I_E=0, V_{CB}=-30V			-100	nA
		I_E=0, V_{CB}=-30V, T_J=150°C			-10	μA
Emitter Cut-Off Current	I_{EBO}	V_{EB}=-4V, I_C=0			-100	nA
DC Current Gain	h_{FE}	I_C=-1mA, V_{CE}=-6V	120			
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	I_C=-50mA, I_B=-5mA (Note 1)			-200	mV
Collector Capacitance	Cc	I_E=I_E=0, V_{CB}=-12V, f=1MHz			2.2	pF
Transition Frequency	f_T	I_C=-2mA, V_{CE}=-12V, f=100MHz	100			MHz

Note: 1. Pulse test: Pulse Width≤300μs, Duty Cycle≤2.0%

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.