


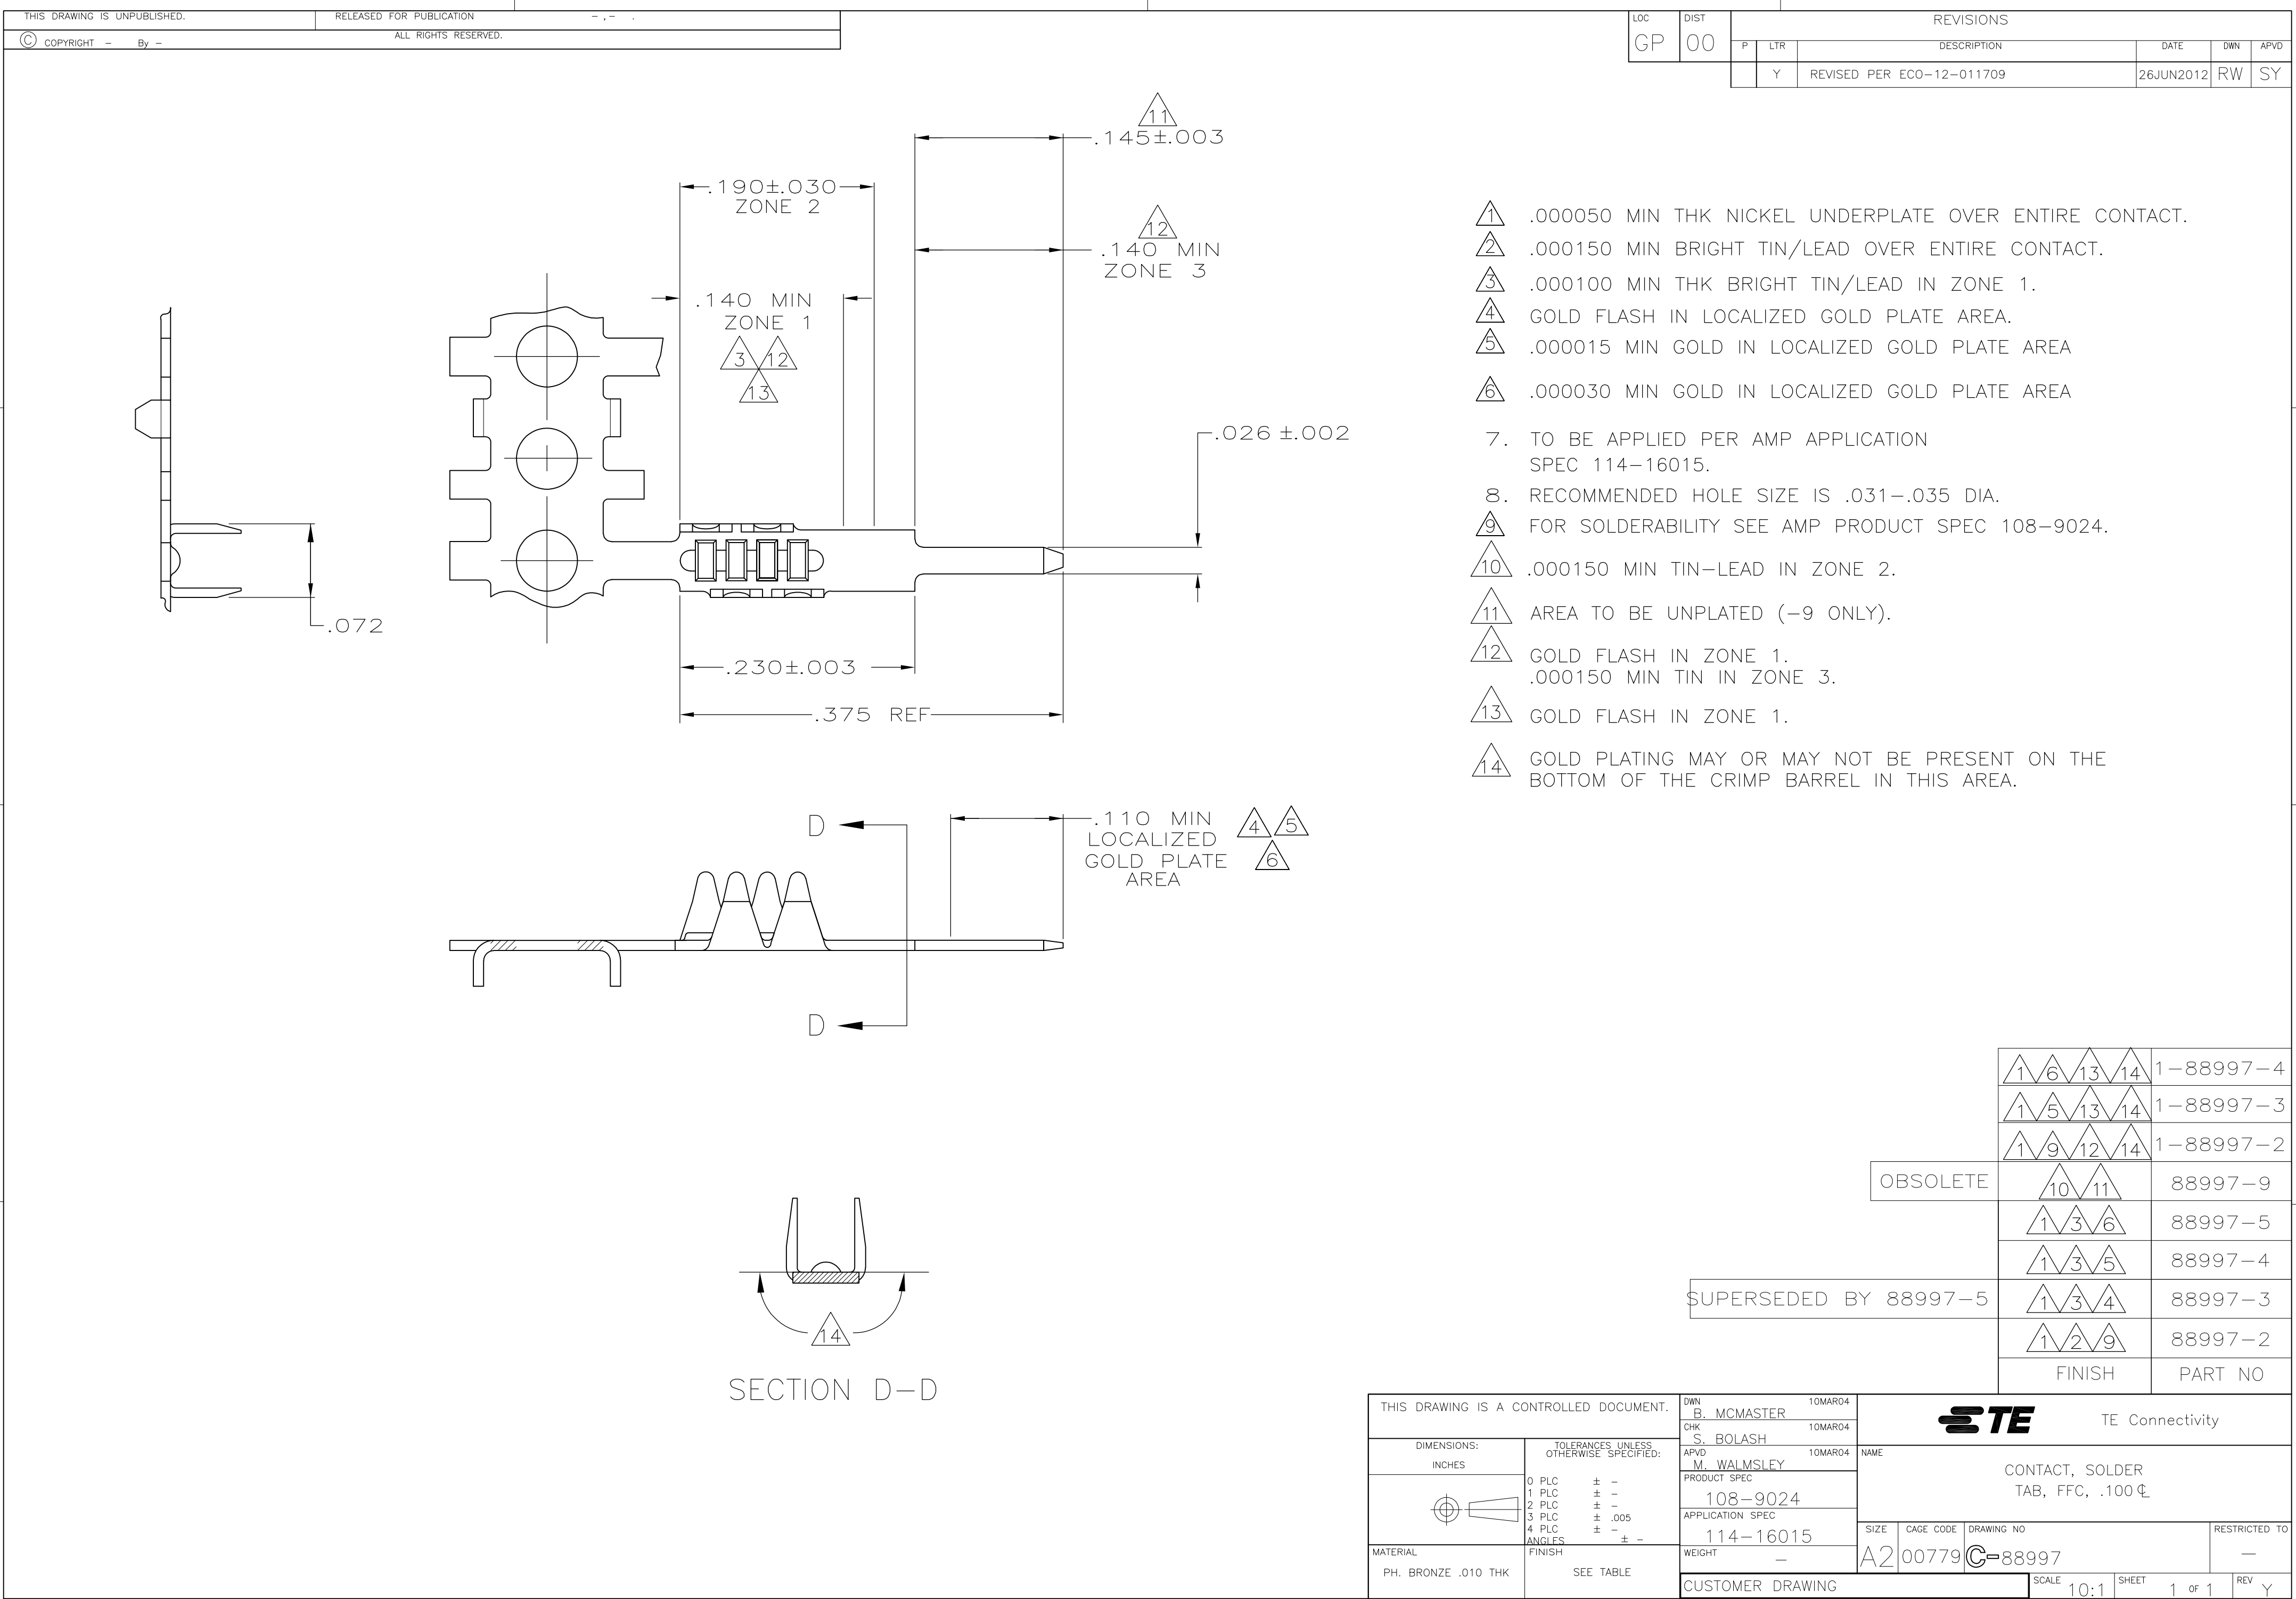

- 1 .000050 MIN THK NICKEL UNDERPLATE OVER ENTIRE CONTACT.
- 2 .000150 MIN BRIGHT TIN/LEAD OVER ENTIRE CONTACT.
- 3 .000100 MIN THK BRIGHT TIN/LEAD IN ZONE 1.
- 4 GOLD FLASH IN LOCALIZED GOLD PLATE AREA.
- 5 .000015 MIN GOLD IN LOCALIZED GOLD PLATE AREA
- 6 .000030 MIN GOLD IN LOCALIZED GOLD PLATE AREA
- 7. TO BE APPLIED PER AMP APPLICATION SPEC 114-16015.
- 8. RECOMMENDED HOLE SIZE IS .031-.035 DIA.
- 9 FOR SOLDERABILITY SEE AMP PRODUCT SPEC 108-9024.
- 10 .000150 MIN TIN-LEAD IN ZONE 2.
- 11 AREA TO BE UNPLATED (-9 ONLY).
- 12 GOLD FLASH IN ZONE 1. .000150 MIN TIN IN ZONE 3.
- 13 GOLD FLASH IN ZONE 1.
- 14 GOLD PLATING MAY OR MAY NOT BE PRESENT ON THE BOTTOM OF THE CRIMP BARREL IN THIS AREA.

	161314	1-88997-4
	151314	1-88997-3
	191214	1-88997-2
OBSOLETE	1011	88997-9
	1336	88997-5
	1335	88997-4
SUPERSEDED BY 88997-5	1334	88997-3
	1229	88997-2
	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	-

FINISH
SEE TABLE

MATERIAL
PH. BRONZE .010 THK

DWN
B. MCMASTER
10MAR04

CHK
S. BOLASH
10MAR04

APVD
M. WALMSLEY
10MAR04

PRODUCT SPEC
108-9024

APPLICATION SPEC
114-16015

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

CONTACT, SOLDER
TAB, FFC, .100 ϕ

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=88997

RESTRICTED TO
-

SCALE
10:1

SHEET
1 of 1

REV
Y