


REVISION	DESCRIPTION	DATE	DRAFTER
A0	FIRST RELEASE	18.04.16	DENGJUN.TAN

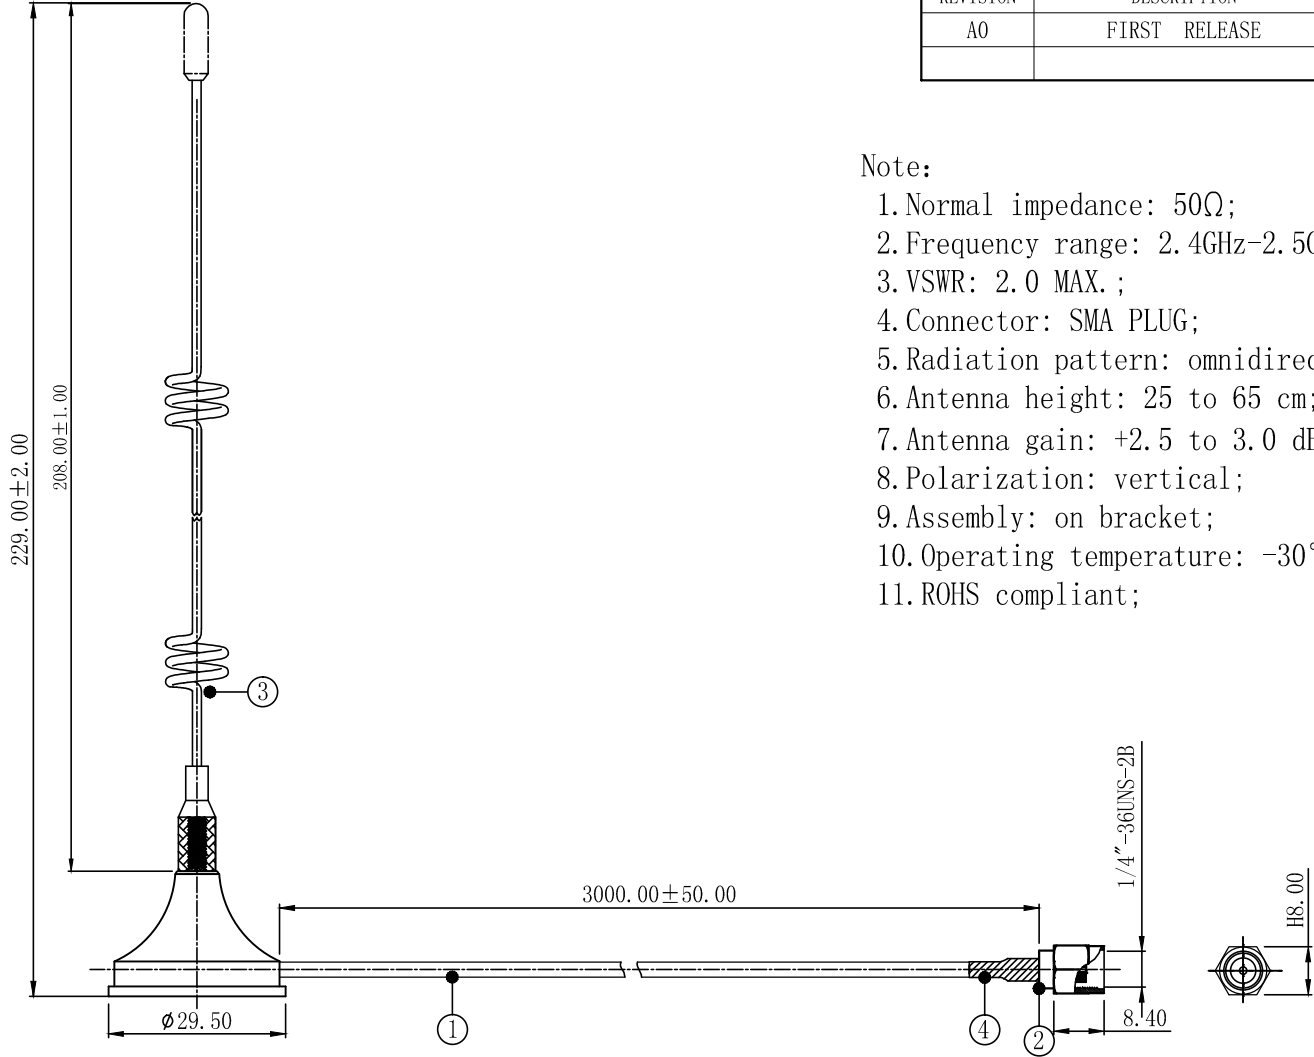

- Note:
1. Normal impedance: 50Ω;
 2. Frequency range: 2.4GHz-2.5GHz;
 3. VSWR: 2.0 MAX.;
 4. Connector: SMA PLUG;
 5. Radiation pattern: omnidirectional;
 6. Antenna height: 25 to 65 cm;
 7. Antenna gain: +2.5 to 3.0 dBi min (peak);
 8. Polarization: vertical;
 9. Assembly: on bracket;
 10. Operating temperature: -30° C to +90° C;
 11. ROHS compliant;

4	-	OD3.50*15mm黑色热缩管收缩比例为2:1	1	---
3	-	天线组件, WIFI吸盘天线组件	1	---
2	-	SMA公头母针, 表面镀金	1	---
1	-	CABLE, RG174, 黑色	1	依裁线图裁线
No.	PART NUMBER	PART NAME & DESCRIPTION	Q' TY	REMARKS

COMPLIANCE WITH THE REQUIREMENT: RoHS; HF; SONY SS-00259; OTHERS
 *NO USING ESTRICTED AND BANNED SUBSTANCE

GENERAL TOLERANCE:	
LINEAR:	
X	±0.20
X.X	±0.15
X.XX	±0.05
X.XXX	±0.01
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司	
FILE NAME: 产品图	TITLE: 2.4G吸盘天线
ENG/DATE: DENGJUN.TAN/18.04.16	RG174, 黑色; P1端焊接吸盘天线;
CHE/DATE:	P2端焊接直头SMA公头公针; 外露线长3000mm
APP/DATE:	P/N: HJ-2.4G-SMA-RG174-3M
UNIT: mm	SCALE: 1:1
REVISION: A0	SHEET: 1/1