UNCONTROLLED DOCUMENT

PART NUMBER

LPI-C011701S-150C


REV.


REV. E.C.N. NUMBER AND REVISION COMMENTS DATE

A E.C.N. #11148. 01.24.07


PANEL CUT OUT: \$6.00mm.

PANEL THICKNESS: 1.80mm ~ 4.80mm.

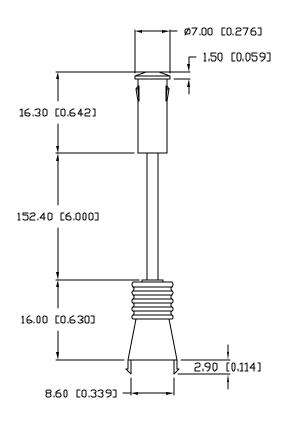

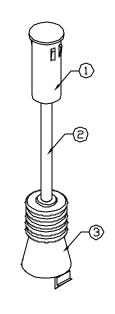

RECOMMENDED PCB CUT OUT

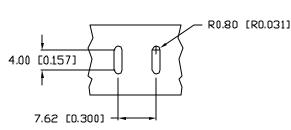

NOTES:

- 1. LXP-LXNOD1701C.
- 2. LXP-LPI011701-170.
- 3. LXP-H011701.
- 4. RECOMMENDED LED: SSL-LX3054XX.



SCALE:

N/A

UNCONTROLLED DOCUMENT

**UNLESS DTHERWISE SPECIFIED TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION MAX.= +0.000

**UNLESS DTHERWISE SPECIFIED TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= +DECINAL PRECISION MAX.= +0.000

**UNLESS DTHERWISE SPECIFIED TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.001), MIN= +DECINAL PRECISION MAX.= +0.000

**UNLESS DTHERWISE SPECIFIED TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.007), MIN= +DECINAL PRECISION MAX.= +0.000

**TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), XXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.007), MIN= +DECINAL PRECISION MAX.= +0.000

**TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), XXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.007), MIN= +DECINAL PRECISION MAX.= +0.000

**TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), XXX=±0.127 (±0.006). LEAD SIZE=±0.05 (±0.000), MIN= +DECINAL PRECISION MAX.= +0.000

**TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), XXX=±0.025 (±0.010), XXXX=±0.127 (±0.006). LEAD SIZE=±0.000

**TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.008), XXX=±0.025 (±0.010), XXXX=±0.025 (±0.000). LEAD SIZE=±0.000

**TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.008), XXX=±0.025 (±0.000), XXX=±0.025 (±0.000). LEAD SIZE=±0.000

**TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.008), XXX=±0.025 (±0.000). LEAD SIZE=±0.000

**TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.008), XXX=±0.025 (±0.000). LEAD SIZE=±0.000

**TOLERANDES PE

A LPI-C011701S-150C

SINGLE UNIT PANEL MOUNT FLEXIBLE LIGHT TRANSPORTER,

CLEAR LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF
LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX
INC., THE HOLDER OF THIS DOCUMENT SHALL KEP WALL INFORMATION
CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR
IN PART FROM DISCUSSINE AND DISSEMINATION TO ALL THRO PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



JC

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 9.18.02
PAGE: 1 OF 1