
DUAL COMMON CATHODE SCHOTTKY RECTIFIER

Features

- Low forward voltage drop
- Low power loss and High efficiency
- Low leakage current
- High surge capability
- Full lead (Pb)-free and RoHS compliant device

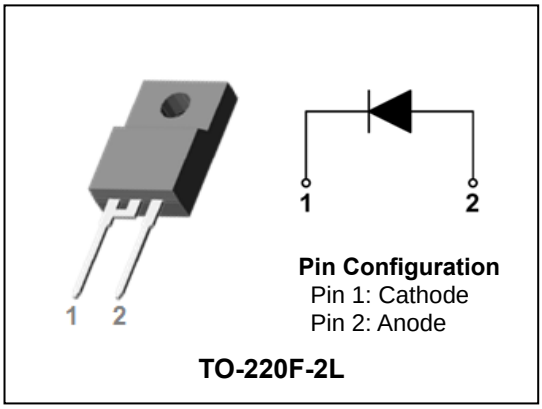

Pin Configuration
Pin 1: Cathode
Pin 2: Anode

TO-220F-2L

Applications

- Power supply - Output rectification
- Converter
- Free-wheeling diode
- Reverse battery protection
- Power inverters

Product Characteristics

$I_{F(AV)}$	5A
V_{RRM}	200V
V_{FM} at 125℃	0.72V (Typ.)
I_{FSM}	120A


Description

The SDB5200PH has two schottky barriers arranged in a common cathode configuration. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

Ordering Information

Device	Marking Code	Package	Packaging
SDB5200PH	SDB5200PH	TO-220F-2L	Tube

Marking Information

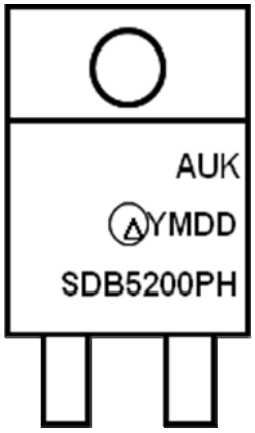

AUK = Manufacture Logo

Δ = Control Code of Manufacture

YMDD = Date Code Marking

-. Y = Year Code

-. M = Monthly Code

-. DD = Daily Code

SDB5200PH = Specific Device Code

Absolute Maximum Ratings (Limiting Values)

Characteristic	Symbol	Value	Unit
Maximum repetitive reverse voltage Maximum working peak reverse voltage Maximum DC blocking voltage	V_{RRM} V_{RWM} V_R	200	V
Maximum average forward rectified current	$I_{F(AV)}$	5	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode	I_{FSM}	120	A
Storage temperature range	T_{stg}	-45℃ to +150℃	℃
Maximum operating junction temperature	T_j	150	℃

Thermal Characteristics


Characteristic	Symbol	Value	Unit
Maximum thermal resistance junction to case	$R_{th(j-c)}$	4.0	℃/W

Electrical Characteristics (Per Diode)

Characteristic	Symbol	Test Condition		Min.	Typ.	Max.	Unit
Peak forward voltage drop	V_{FM} (1)	I_{FM} = 5A	T_j=25℃	-	0.85	0.95	V
			T_j=125℃	-	0.72	0.76	V
Reverse leakage current	I_{RM} (1)	$V_R = V_{RRM}$	T_j=25℃	-	-	10	uA
			T_j=125℃	-	-	10	mA
Junction capacitance	C_j	V_R = 1V_{DC}, f=1MHz		-	150	-	pF

Note : (1) Pulse test : $t_P \leq 380\ \mu s$, Duty cycle ≤ 2%

To evaluate the conduction losses use the following equation: $P_F = 0.68\ I_{F(AV)} + 0.032\ I_F^2{}_{(RMS)}$

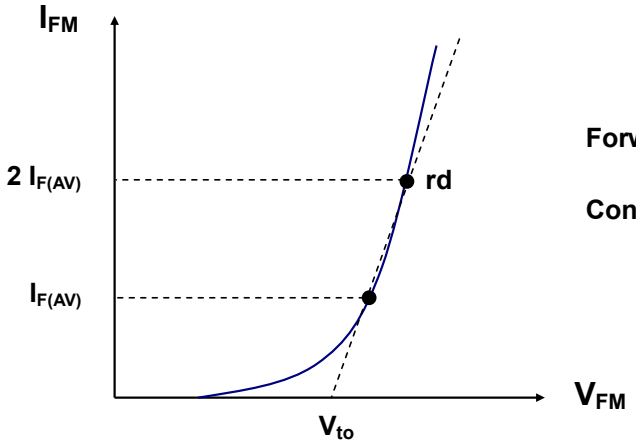

Forward Voltage : $V_{FM} = V_{to} + rd\ I_{FM}$

Conduction Loss : $P_F = V_{to}\ I_{F(AV)} + rd\ I_F^2{}_{(RMS)}$

Rating and Characteristic Curves

Fig. 1) Typical Forward Characteristics

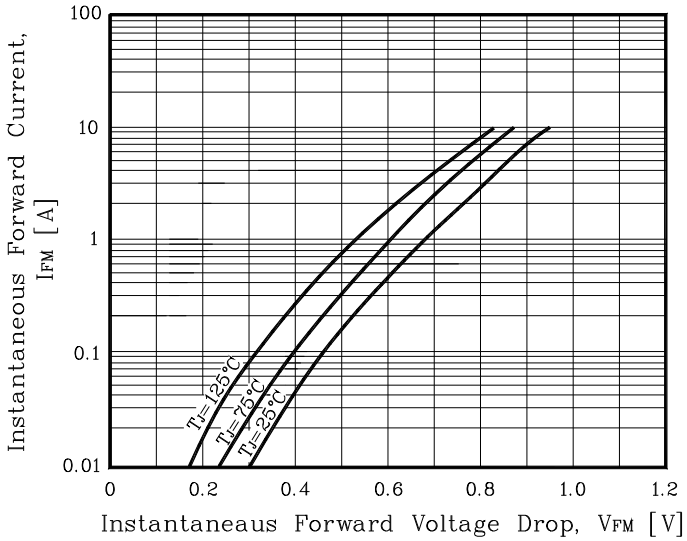


Fig. 2) Typical Reverse Characteristics

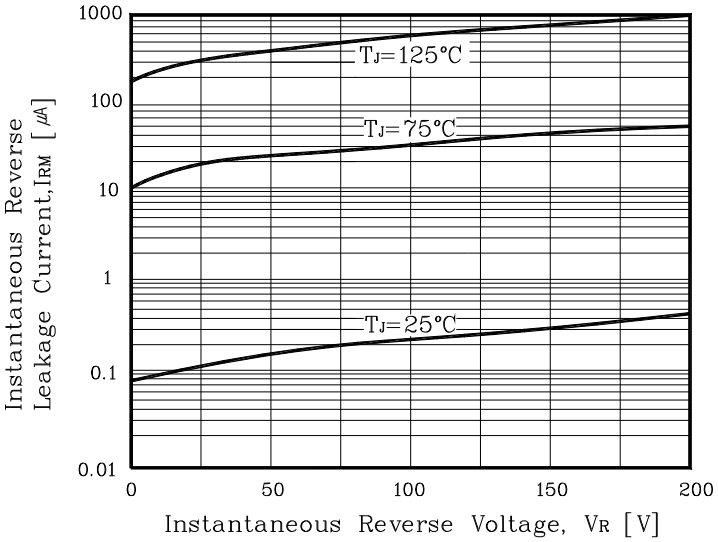


Fig. 3) Maximum Forward Derative Curve

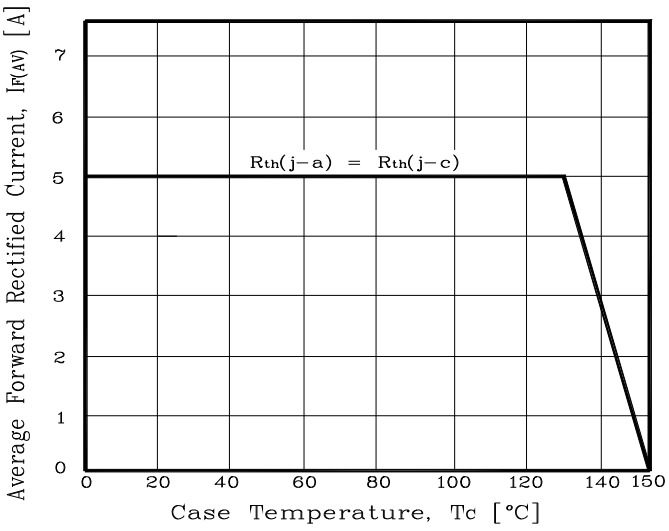


Fig. 4) Forward Power Dissipation

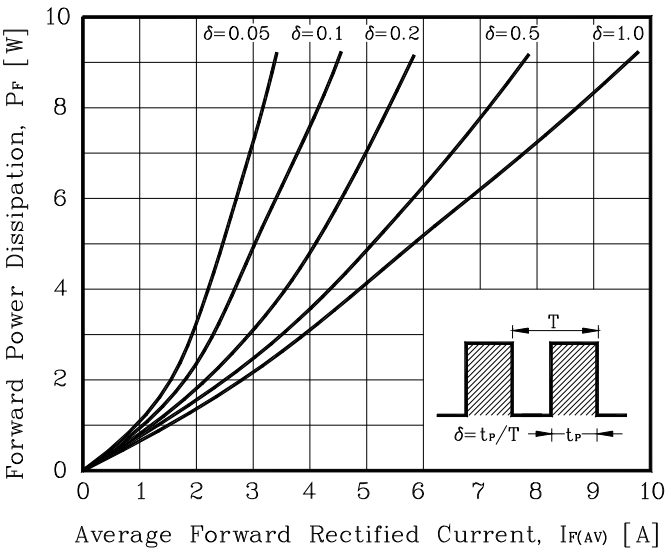


Fig. 5) Maximum Non-Repetitive Peak Forward Surge Current



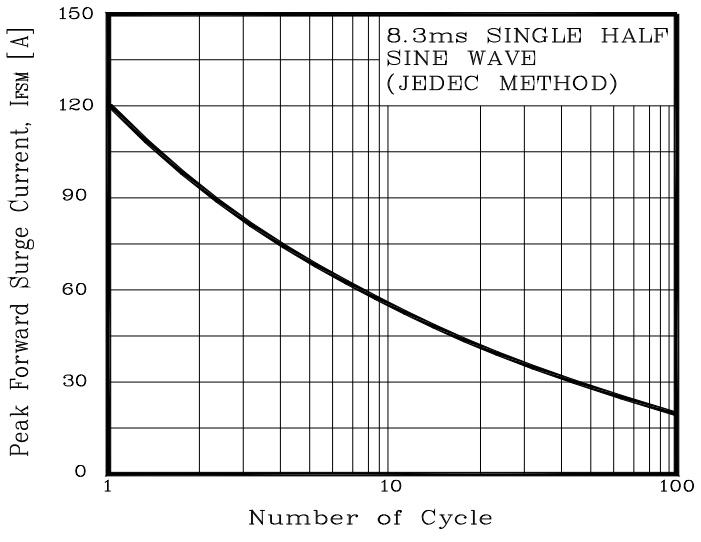


Fig. 6) Typical Junction Capacitance

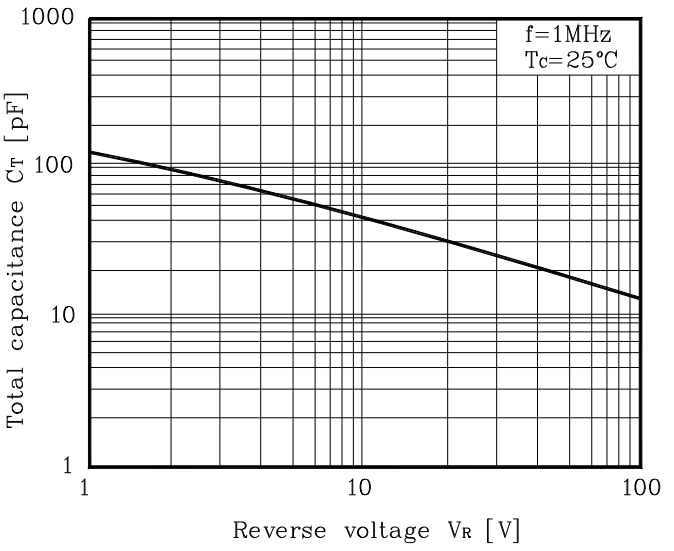

Package Outline Dimension

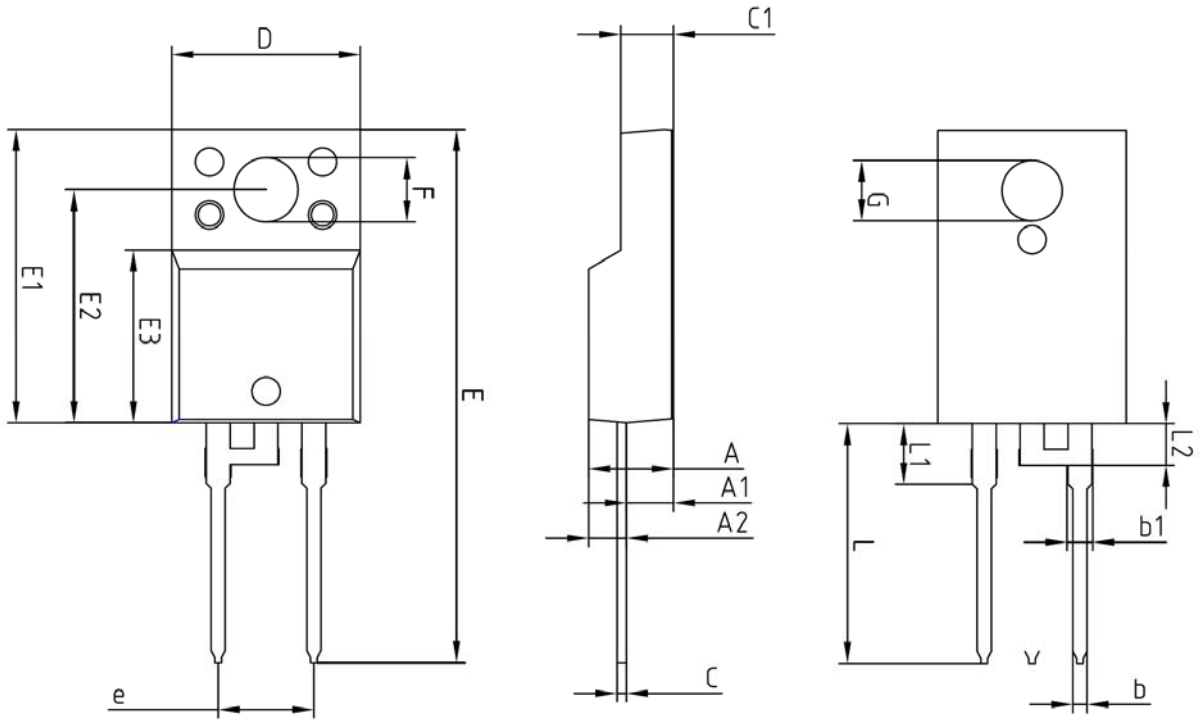

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	–	–	4.60	
A1	2.45	2.50	2.55	
A2	1.95	2.00	2.05	
b	0.65	0.75	0.85	
b1	1.07	1.27	1.47	
C	0.40	0.50	0.60	
C1	2.70	2.80	2.90	
D	9.90	10.00	10.10	
E	28.00	–	28.60	
E1	15.50	15.60	15.70	
E2	12.30	12.40	12.50	
E3	9.15	9.20	9.25	
F	3.30	3.40	3.50	
G	3.10	3.20	3.30	
e	5.08 BSC			
L	12.40	–	13.00	
L1	3.46 BSC			
L2	2.21 BSC			

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.