

SCOCXOLW

3.3V OCXO with CMOS Output and Fast Warm Up




- Fast warm up times
- Low power consumption
- Wide operating temperature range
- Compact 14-pin DIL package (SMD optional)
- High shock and vibration resistance

CONFIGURABLE OPTIONS

Parameter	Option Code
Frequency	
Temperature stability (\pmppb max)	
Any	
± 0.075 ppm max, 0 to $+60^{\circ}\text{C}$	A
± 0.05 ppm max, 0 to $+60^{\circ}\text{C}$	TA
± 0.15 ppm max, -20 to $+70^{\circ}\text{C}$	B
± 0.075 ppm max, -20 to $+70^{\circ}\text{C}$	TB
± 0.25 ppm max, -40 to $+85^{\circ}\text{C}$	C
± 0.10 ppm max, -40 to $+85^{\circ}\text{C}$	TC
± 0.4 ppm max, -55 to $+85^{\circ}\text{C}$	E
± 0.2 ppm max, -55 to $+85^{\circ}\text{C}$	TE
Frequency adjustment	
Any	
± 2.5 ppm min	V
Control voltage 0V ~ 3.3V, pin 1	V
Control voltage 0.5V ~ 5.0V, pin 1	R
Variable resistor 0~10k Ω , pins 1 to 7	A
None (int accuracy ± 1.0 ppm)	B
None (int accuracy ± 0.5 ppm)	
Package	
Through hole 14 pin DIL	
SMD option D1	D1
SMD option D2	D2

SPECIFICATIONS

Frequency range	10.0kHz ~ 54.0MHz
Dimensions	20.1 x 12.5 x 8.0mm
Frequency stability	±0.3ppm max first year ±2.5ppm max in 10 years ±0.1ppm max vs V_{DD} ±10ppb max vs load ±10%
Short term stability	1×10^{-10} max, t 0.1 to 30s 5×10^{-11} typ at 1s
Storage temperature range	-55 to +125°C
Output waveform	CMOS '0' = +0.4V max, '1' = V_{DD} - 0.5V min 40:60 max Rise/fall times 7ns max (no load)
Load	3pF min, 47pF max
Start up time	5ms max
Supply voltage (V_{DD})	+3.3V (±0.15V)
Input current	80mA max @ +25°C 120mA max @ -20°C
Warm up time (secs)	10s to current 250mA max @ 25°C 30s to within ±0.1ppm @ 25°C
Phase noise (dB typ @ 10.0MHz)	-100dBc/Hz @ 10Hz -130dBc/Hz @ 100Hz -140dBc/Hz @ 1kHz -145dBc/Hz @ 10kHz
Shock & vibration	5,000g, 0.3ms ½-sine 10.0 ~ 2,000Hz, 20g

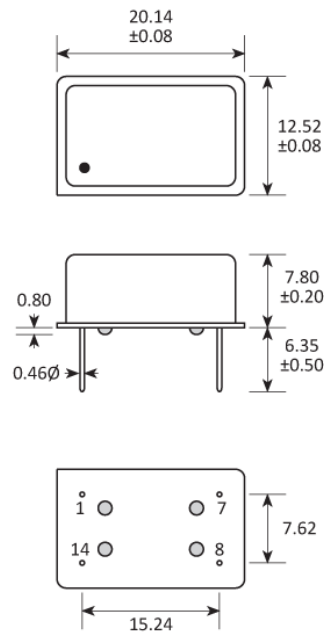PACKAGE DRAWING


PIN	CONNECTION
1	Freq adjustment or Ground
7	Ground
8	Output
14	Supply

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the SCOCXOLW please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

APPLICATIONS

Digital switching
 Telecomm transmission
 SONET, SDH, DWDM, FDM/36, WIMAX
 Airborne equipment
 Battery operated systems

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)




Moisture Sensitivity Level (MSL): 1 (or not applicable)

TECHNICAL RESOURCES

DIL-14 OCXO SMD options.pdf

SOLDERING PROFILE

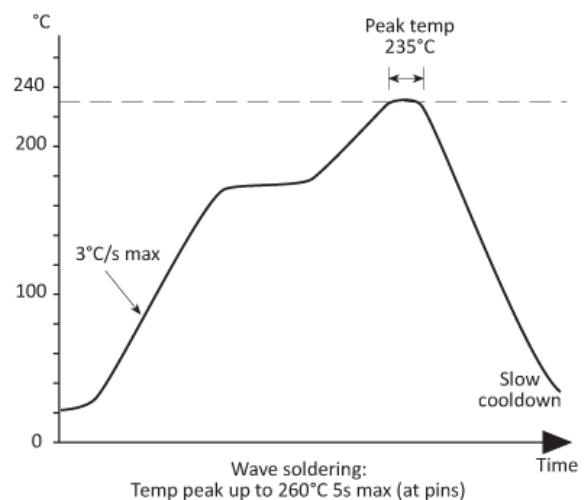

CONSTRUCTION

Resistance weld

MATERIAL COMPOSITION



RoHS 2 compliant with 7(a) exemption. [See our](#)

[declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our](#)

[declaration](#)

OTHER INFORMATION

About Golledge

We are the UK's leading supplier of frequency control products and are proud to serve the global electronics industry. Our philosophy is a focus firmly on your requirements by striving to meet and exceed your needs. We do this by ensuring the utmost quality and consistency in our products and services. If you have any queries about the Golledge service or any of our products please get in touch, we'd love to hear from you.

Come and visit

Eaglewood Park, ILMINSTER,
Somerset, TA19 9DQ, England

Give us a call

Tel: +44 1460 256 100
Fax: +44 1460 256 101

Email us

sales@golledge.com

Our Worldwide Distributors

Belgium & Luxembourg

Alcom Electronics NV/SA



Email info@alcom.be
Web www.alcom.be
Tel +32 (0)3 458.30.33

China, Hong Kong - 中国 / 香港

Meiya China



Email sales@meiyatech.com
Web www.meiyatech.com
Tel +86 755 2823 1923

France

Equipments Scientifique



Email comp@es-france.com
Web www.es-france.com
Tel +33 1 47 95 99 89

Germany

MEV Elektronik Service GmbH



Email info@mev-elektronik.com
Web www.mev-elektronik.com
Tel +49 54 24 23 40-0

India

V5 Semiconductors



Email sales@v5semiconductors.com
Web v5semiconductors.com
Tel +91-80-2661 0621

Israel

Phoenix Technologies Ltd



Email sales@phnx.co.il
Web www.phnx.co.il
Tel +972 9 764 4800

Netherlands

Alcom Electronics BV



Email info@alcom.nl
Web alcom.nl
Tel +31 (0)10 288.25.00

Norway

Link Nordic



Email bjorn.nyjordet@linknordic.com
Web linknordic.com
Tel +47 93 22 68 90

Russia - Россия

EFO Ltd



Email elena@efo.ru
Web www.golledge.ru
Tel +7(812)327-8654

Spain & Portugal

R.C. Microelectronica, S.A.



Email ventas@rcmicro.es
Web www.rcmicro.es
Tel +34 93 260 21 66

Our customer feedback is testament to our quality; "Never had such good service as this from anyone in 35 years of being in the industry, this is impressive and has really helped us out of a corner to keep the design flowing" Andy (Senior Design Engineer), "As always your support is state of the art" Nicoleta (Material Management), "Legendary work - as usual it has to be said" John (Operations).

To take advantage of our highly praised service get in touch with us today.