


SHEET OF

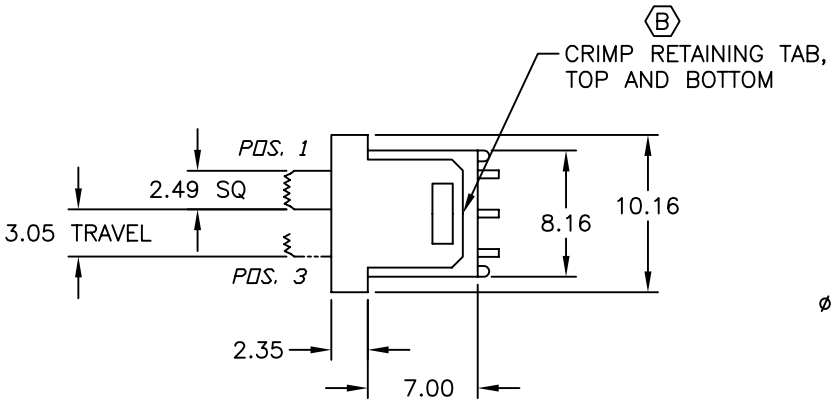

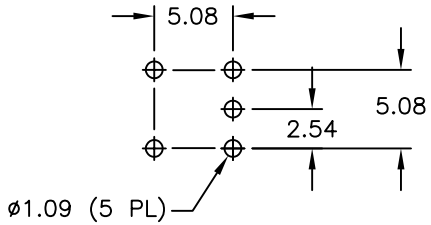


RECOMMENDED PCB LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-1	OPEN	2-3

CONTACT CONFIGURATION

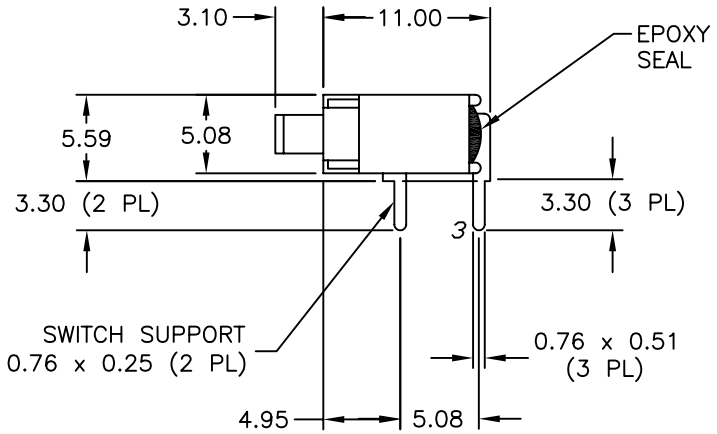



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
   0.00=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4 VOLT-AMPS @ 20V MAX (AC OR DC)
5. ELECTRIC LIFE: 30,000 ACTUATIONS @ FULL LOAD
6. INSULATION RESISTANCE: 1,000 Mega-ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. (B) CRIMP METAL RETAINING BRACKET
9. OPERATING TEMP.: -30°C to 85°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	15950	7.00 DIM WAS 8.79	4/10/06	CT
B	14984	ADDED NOTES	7/5/05	JB
A	10673	RELEASED FOR PRODUCTION	6-12-00	GLG

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 500A SSP-1 M6 R E

SCALE	DATE	DR	DWG	REV
2:1	6-12-00	GLG	T551102	C