
Product Data

Thermally Conductive Silicone Oil Compound YG6111

YG6111 is a metal-oxide-filled silicone compound designed to provide superior thermal conductivity. This combination of high purity fillers and silicone results in a smooth, homogeneous, white, high temperature dielectric compound. It has virtually no oil separation or high temperature weight loss and possesses truly outstanding thermal conduction properties.

YG6111 is suggested for use in semi-conductor devices, and thermal joints where it maintains a positive seal which improves the heat transfer. This means that electrical and electronic components will perform their function at much lower temperatures, thereby increasing their efficiency and prolonging their life.

KEY FEATURES

- ◆ High thermal conductivity
- ◆ Wide operating temperature range: -50°C to 200°C
- ◆ Low volatility

APPLICATIONS

- ◆ For heat-sink of semiconductor devices

TYPICAL PROPERTY DATA

PROPERTIES		
Appearance		White
Specific gravity (25°C)		2.45
Worked penetration ^{*1} (25°C)		310
Bleed ^{*1} (150°C, 24h)	%	0.4
Evaporation (150°C, 24h)	%	0.1
Thermal conductivity	W/(m·K)	0.84
Volume resistivity ^{*2}	Ω·cm	2×10 ¹⁴
Dielectric constant (60Hz)		5.0
Dissipation factor (60Hz)		0.006
Volatile siloxane (D ₃ -D ₁₀)	ppm	100

*1:JIS K 2220

*2:MIL-S-8660B

Typical property data values should not be used as specifications.

COMPATIBILITY WITH PLASTICS AND RUBBER

SUBSTRATE	CRACK	COLOR CHANGE
ABS	No crack	No change
PBT	No crack	No change
PPS	No crack	No change
Polycarbonate	No crack	No change
Nylon 6,6	No crack	No change
NBR	No crack	No change

Test method


Test specimen: 80mm×12mm×2mm

Procedure:


1. The test specimen is bent into a circular arc of 75mm chord length.
2. YG6111 is applied on the outside surface of the specimen.
3. The specimen is left in the 70°C oven for 250 hours.
4. After that, an appearance of the specimen is observed.

Note: A preliminary test should be performed before using.


BLEED CHANGE WITH TEMPERATURE

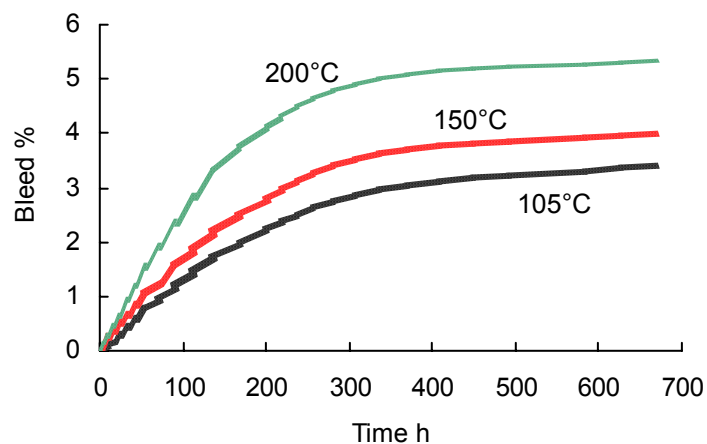

WORKED PENETRATION CHANGE WITH TEMPERATURE

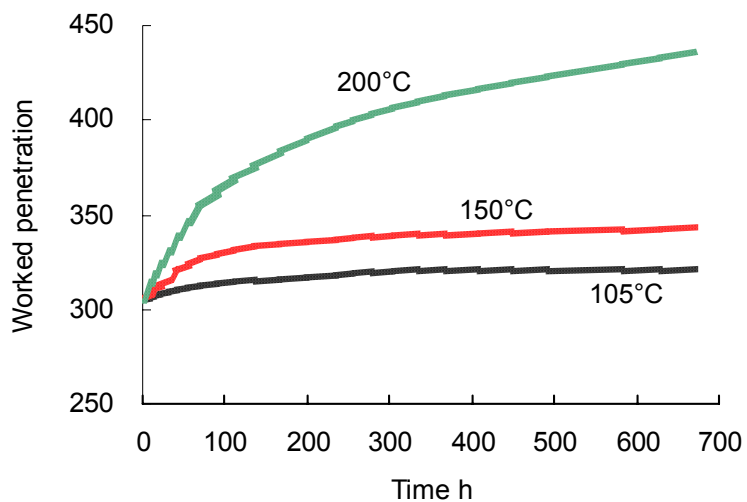

WEIGHT LOSS CHANGE WITH HEATING

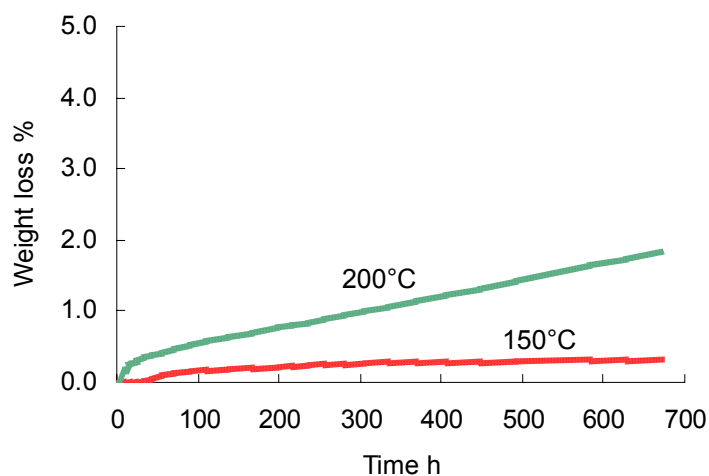

HANDLING AND SAFETY

- ◆ Wear eye protection and protective gloves as required while handling the product.
- ◆ Use the product in a well ventilated area.

STORAGE

- ◆ Store in a cool, dry place out of direct sunlight.
- ◆ Keep out of the reach of children.

PACKAGING

- ◆ 200g tube available in case of 20
- ◆ 1kg can available in cases of 10
- ◆ 20kg pail available

Issued Aug. 1999/4th revised Jun. 2005, YG6111 E

FOR INDUSTRIAL USE ONLY

It is the responsibility of the user to determine the suitability of any Momentive Performance Materials Japan product for any intended application. NEVER USE ANY MOMENTIVE PERFORMANCE MATERIALS JAPAN PRODUCT FOR IMPLANTATION OR INJECTION INTO THE HUMAN BODY. Specifications are available by contacting Momentive Performance Materials Japan. Typical property data values should not be used as specifications. Inasmuch as Momentive Performance Materials Japan LLC has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the suitability of the material for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Momentive Performance Materials Japan patent covering use or as recommendations for use of such materials in the infringement of any patent. Material Safety Data Sheets are available upon request from Momentive Performance Materials Japan. The contents of this catalog are subject to change without notice. No part of this data may be reproduced without the prior approval of Momentive Performance Materials Japan.



Momentive Performance Materials Japan LLC

<http://www.momentive.com>

Technical Answer Center (Japan): Phone: +81-276-20-6182 FAX: +81-276-31-6259
Tokyo Head Office: Phone: +81-3-5544-3111 FAX: +81-3-5544-3122