

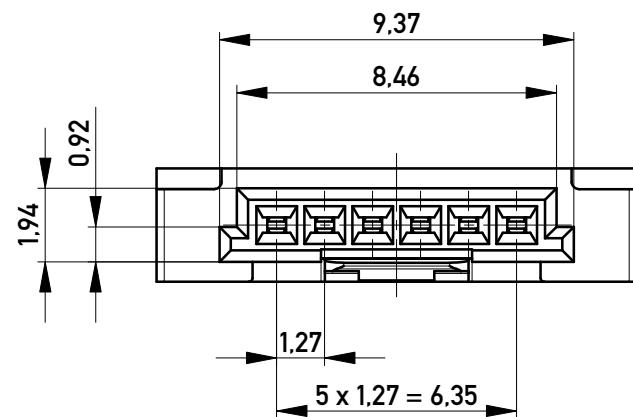
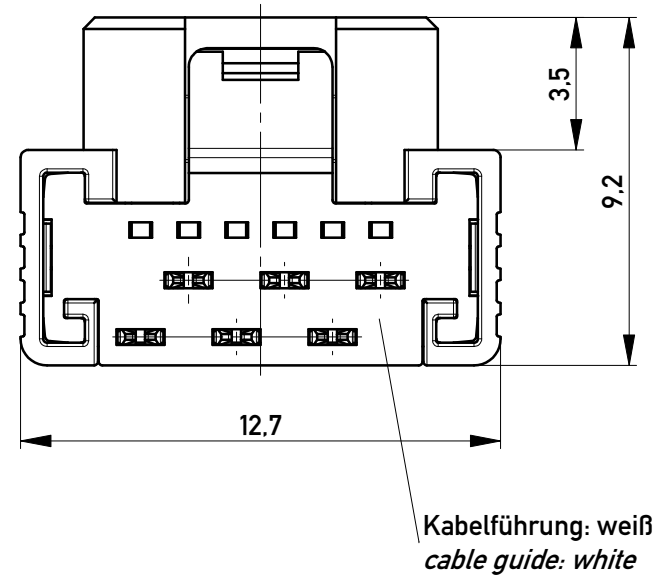



mit aufgesetzter
Kabelführung
(Anlieferungszustand)
with cable guide mounted
(state at time of supply)

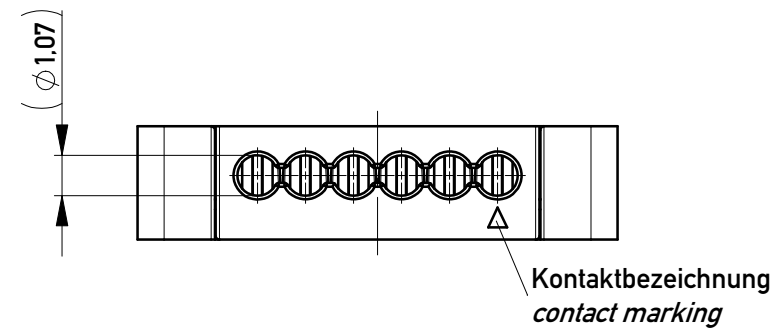

Kabelführung verpresst
(cable guide pressed on)

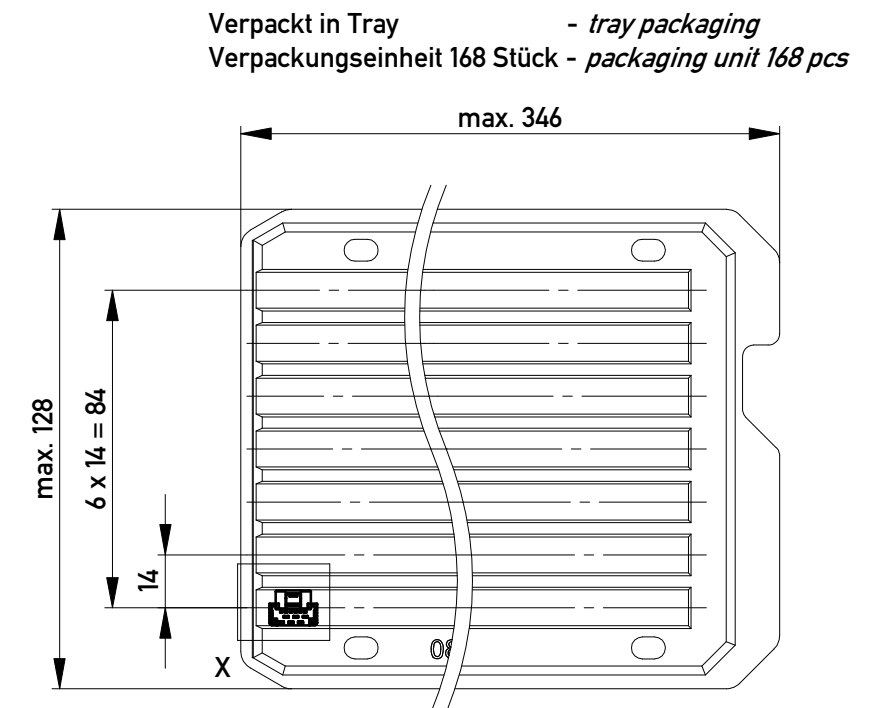


Einzelheit X - detail X
M 2:1

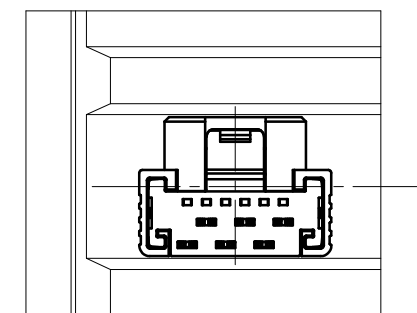

* Federkontakt AWG 24-26 - Female Contact AWG 24-26
Kabelführung $\varnothing 1,07$ - cable guide $\varnothing 1,07$
Kabelführung Farbe weiß - componentcolor: white

ohne Hilfsmittel lösbar
without tool unlockable

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16046 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 5:1		Without tool measurable	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation					
						1,27 SRC A SKV, 6-polig 1,27 SRC A IDC, 6-pin					
						100203580001					
				a		19.05.2014				www.ERNI.com	
Index		Date						Class		SRCA	
										A3	

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.