

Model:ZCT035

Characteristic:

Crimp terminal output,with suppressor diode (TVS)
built in,used to leakage current protection (EGR) or
zero sequence current measurement.

Technical index:

Sub-plate

Core material: permalloy

Flame resistance: UL94-V0

Complaint with: GB1208-2006

Working temperature: -20℃~+70℃

Storage temperature: -30℃~+90℃

Work frequency: 50Hz-60Hz


Dielectric strength: 3.5KV 50Hz 1min




Electrical Index:

Rated input	200	mA
Max input		A
Rated output	1.5	mA
Turn ratios	1: 133	
Accuracy class	±10	%
Linearity	≤0.2	%
Phase error		
Sampling resistance max		Ω
weight		g


Connect diagram:




Dimension(in mm):

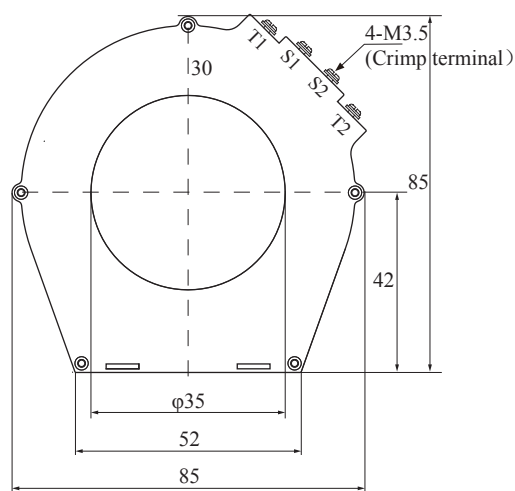

Front View

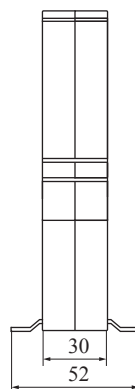

Side View



Bottom View