

MR8032 series



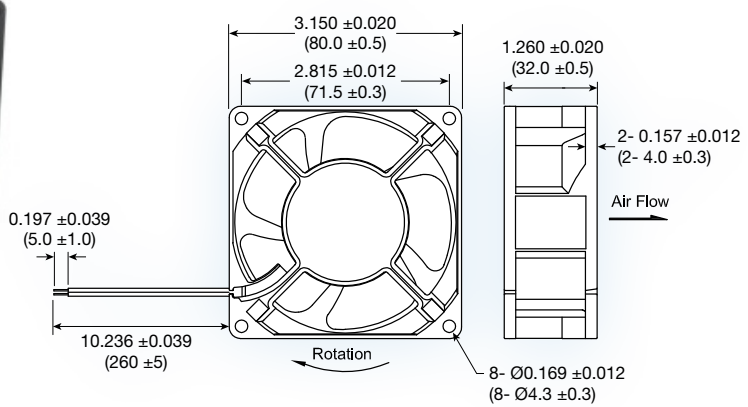

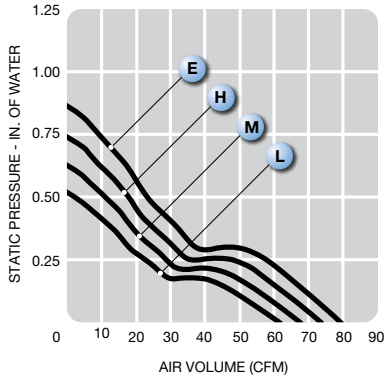

(80 x 80 x 32 mm)

3.15 x 3.15 x 1.26 inches

Features:	soft start, polarity protection, auto-restart
Operating Voltage:	12 or 24 VDC
Construction:	UL94V-0 plastic impeller and frame
Bearing option:	ball bearing or sleeve
Air Flow:	air exhaust over struts
Options:	tachometer output or locked rotor alarm signal; PWM speed control

Model No.	Rated Voltage	Current A		Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	VDC	12	24	RPM	M^3/Min.	CFM	MM	INCH	dbA	g
MR8032L	12/24	0.42	0.21	5,000	1.72	61	13.55	0.53	41.6	144
MR8032M	12/24	0.54	0.27	5,500	1.89	67	16.34	0.64	45.2	144
MR8032H	12/24	0.70	0.35	6,000	2.06	73	19.39	0.76	48.6	144
MR8032E	12/24	0.86	0.43	6,500	2.23	79	22.70	0.89	50.4	144