

1. Dimensions:

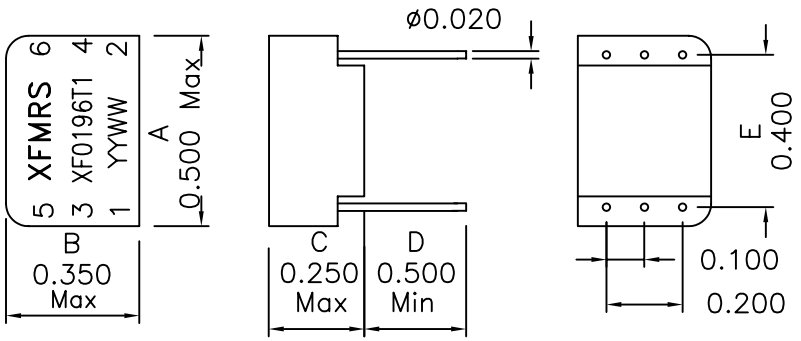

2. Schematic:

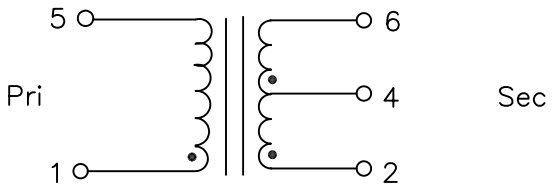

3. Electrical Specifications: @25°C

Isolation Voltage: 3000Vrms (PRI/SEC)
Turns Ratio: 1:2CT ±5% (PRI:SEC)
PRI OCL: 19uH Minimum @100KHz 50mV
PRI LL: 0.06uH Maximum @100KHz 50mV (SEC Shorted)
Cw/w: 10pF Maximum @100KHz 50mV (PRI/SEC)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV A/1

XFMRS Inc www.XFMRS.com	Title: TRANSFORMERS		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF00196T1		REV. A
	DWN.	龚玉坤	Mar-10-09
	CHK.	李清	Mar-10-09
SCALE 2:1 SHT 1 OF 1	APP.	BW	Mar-10-09

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.