

FEATURES :

- 6W SIP8 Package
- 4:1 Wide Input Voltages Range
- High Efficiency Up To 88%
- Customized Solutions Available
- Remote Control: On/Off
- Operating Temperature From -40°C To +85°C
- UL94V-0 Package Material
- EMC Standard of EMI EN55032:2012+AC:2013 (Class B) Approved
- EMC Standard of EMS EN55024:2010 Approved
- 3 Years Warranty

YUAN DEAN SCIENTIFIC



DC-DC Converter


27DW-6W SERIES

6Watt 1.5KV Isolated


4 : 1 Input Voltage Range

Single & Dual Output

SIP8



Temperature Derating Graph

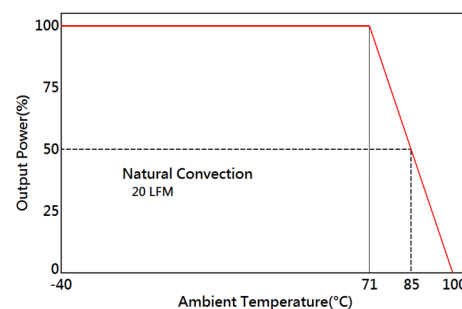

www.yds.com.tw

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Input Voltage Range	Input Current		Output Voltage Range	Output Current	Efficiency
	Vdc	No Load (mA TYP)	Full Load (mA TYP)	Vdc	mA	%TYP
27DW-24S03R6W	9-36	7	255	3.3	1500	81
27DW-24S05R6W	9-36	7	298	5	1200	84
27DW-24S12R6W	9-36	7	287	12	500	87
27DW-24S15R6W	9-36	7	284	15	400	88
27DW-24S24R6W	9-36	7	287	24	250	87
27DW-48S03R6W	18-72	7	127	3.3	1500	81
27DW-48S05R6W	18-72	7	149	5	1200	84
27DW-48S12R6W	18-72	7	144	12	500	87
27DW-48S15R6W	18-72	7	144	15	400	87
27DW-48S24R6W	18-72	7	144	24	250	87
27DW-24D12R6W	9-36	7	287	±12	±250	87
27DW-24D15R6W	9-36	7	287	±15	±200	87
27DW-48D12R6W	18-72	7	144	±12	±250	87
27DW-48D15R6W	18-72	7	144	±15	±200	87

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Types	Vo, Io Nom			4:1	
Filter	Capacitor				



TEL : 886-6-3842899 FAX : 886-6-3843288
E-MAIL : ydsweb@yds.com.tw

Rev:0 2018/10/31


Part Number

27DW - 24 S 05 R 6W
A B C D E F

A: Series
B: Input Voltage
C: Single Output
D: Output Voltage
E: Regulated(R)
F: Watt


Recommended Test Circuit

24V&48V: Cin 10uF, 100mV

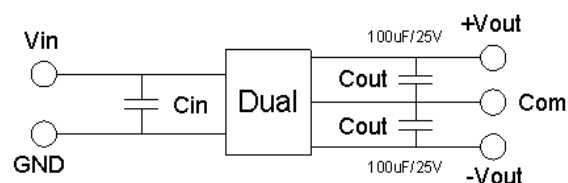

24V & 48V : Cin 10uF,100V

Dimensions

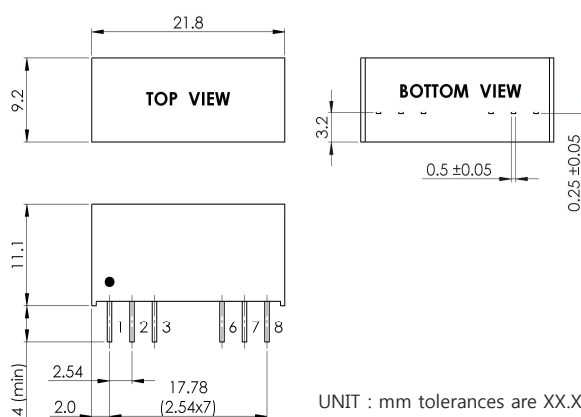

UNIT : mm tolerances are $XX.X \pm 0.5$, $XX.XX \pm 0.25$, the tolerance of Pin size is ± 0.05

PIN Connection

Pin	1	2	3	6	7	8
Single	-Vin	+Vin	Remote ON/OFF	+Vout	-Vout	NC
Dual	-Vin	+Vin	Remote ON/OFF	+Vout	COM	-Vout