




表面安装肖特基二极管  
反向电压 20 ~ 200 V  
正向电流 5.0 A

Surface Mounted Schottky Barrier Rectifiers  
Reverse Voltage 20 ~ 200 V  
Forward Current 5.0 A

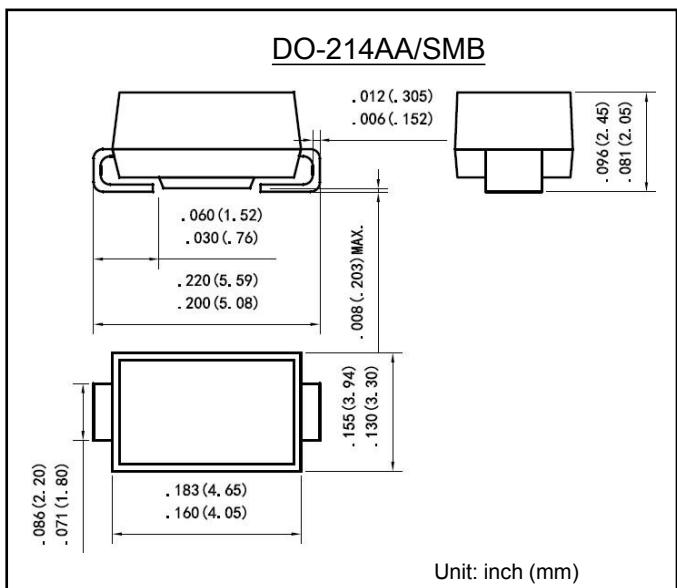

### 特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒  
260°C/10seconds
- 引线和管体皆符合RoHS标准  
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
Green compound with suffix "-F" on Marking

### 机械数据 Mechanical Data

- 封装外形:DO-214AA 塑封 Case:DO-214AA Molded plastic
- 环氧树脂 : UL 易燃等级 : 94V-0  
Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free

**最大值和特性** TA = 25°C 除非另有规定。

**Maximum Ratings & Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	SS52 B	SS53 B	SS54 B	SS55 B	SS56 B	SS58 B	SS510 B	SS515 B	SS520 B	单位 Unit						
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	200	V						
最大均方根电压 Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	105	140	V						
最大直流阻断电压 Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	200	V						
最大正向平均整流电流 Maximum average forward rectified current	I <sub>F(AV)</sub>	5.0								A							
正向不重复浪涌电流 8.3 ms 单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	I <sub>FSM</sub>	150								A							
最大正向电压 @IF=5.0A Maximum forward voltage	V <sub>F</sub>	0.55		0.70		0.85		0.92	0.95	V							
最大反向电流 @V <sub>DC</sub> TA= 25°C Maximum reverse current TA= 100°C	I <sub>R</sub>	1000				100				μA							
		20				10				mA							
典型热阻 Typical thermal resistance (Note 1)	R <sub>θJA</sub>	85								°C/W							
	R <sub>θJL</sub>	25															
典型结电容 VR=4.0V,f=1MHz Type junction capacitance	C <sub>J</sub>	300								pF							
工作结温 Operating junction	T <sub>J</sub>	-55 --- +125				-55 --- +150				°C							
存储温度 Storage temperature rang	T <sub>STG</sub>	-55 --- +150								°C							

备注 Note:


- 1) 安装在PCB板上，从PN结到周围环境的热阻。
- 1) Thermal resistance from junction to ambient , PCB mounted.



## 特性曲线 Characteristic Curves


正向特性曲线 (典型值)

TYPICAL FORWARD CHARACTERISTIC

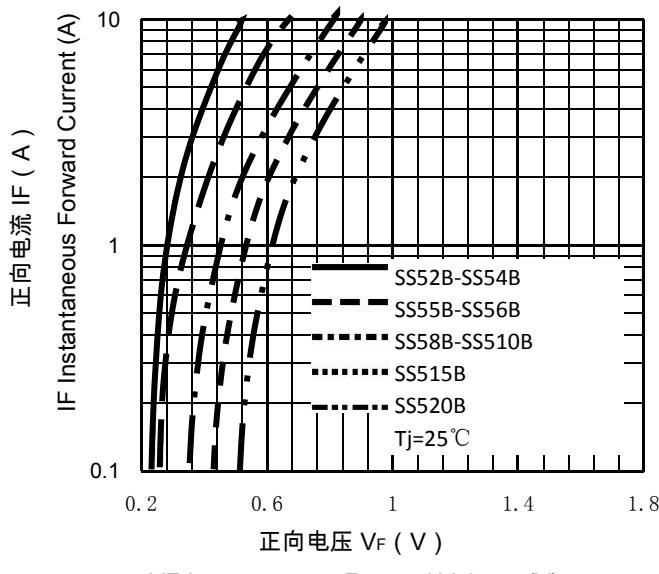

正向电流降额曲线


FORWARD CURRENT DERATING CURVE

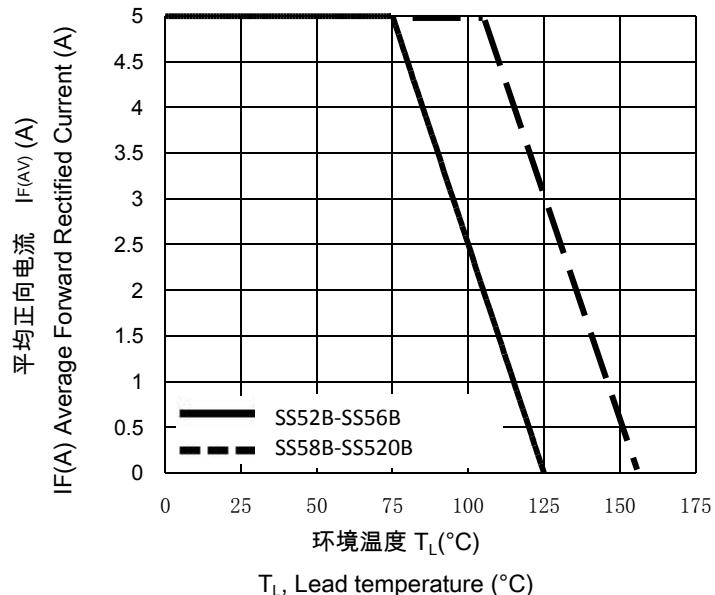

浪涌特性曲线 (最大值)

MAXIMUM NON REPETITIVE

PEAK FORWARD SURGE CURRENT

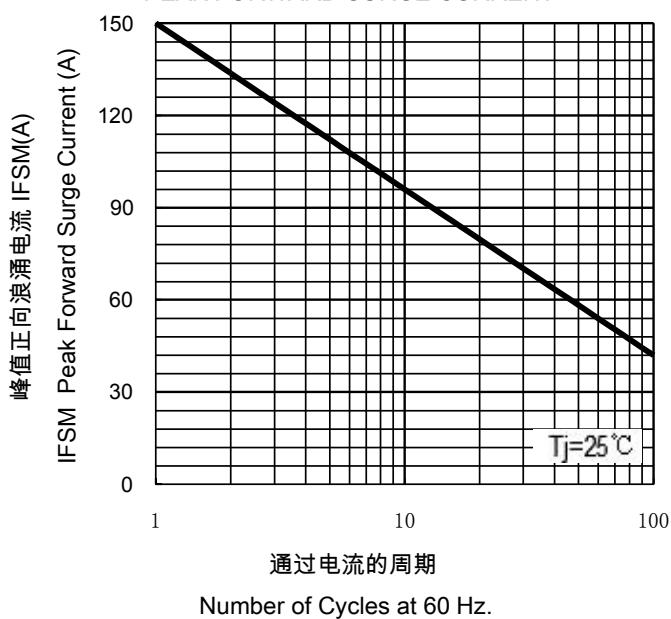

反向特性曲线

Typical Reverse Characteristics

