
UTC 2SA1700 PNP EPITAXIAL SILICON TRANSISTOR

HIGH VOLTAGE DRIVER APPLICATION

FEATURES

*High breakdown voltage.

*Excellent h_{FE} linearity.



TO-251

1: BASE 2:COLLECTOR 3:EMITTER

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-400	V
Collector-Emitter Voltage	V_{CEO}	-400	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	Ic	-200	mA
Collector Current (PULSE)	Icp	-400	mA
Collector Power Dissipation	Pc	1	W
		10(Tc=25°C)	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 ~ +150	°C

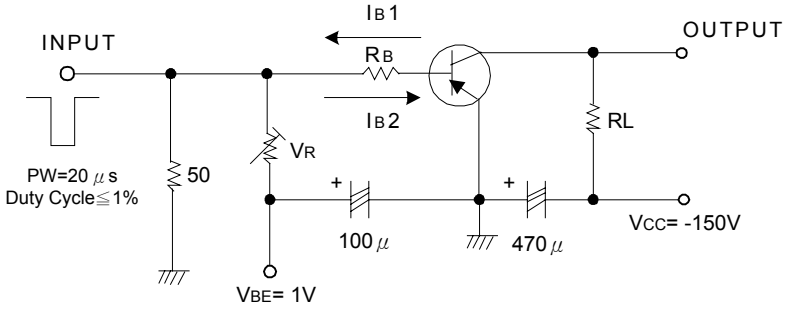
ELECTRICAL CHARACTERISTICS (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV_{CBO}	I_C= -10μA,I_E=0	-400			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	I_C= -1mA, I_B=0, R_{BE}=∞	-400			V
Emitter-Base Breakdown Voltage	BV_{EBO}	I_E= -10μA,I_C=0	-5			V
Collector Cutoff Current	I_{CBO}	V_{CB}= -300V,I_E=0			-0.1	μA
Emitter Cutoff Current	I_{EBO}	V_{EB}= -4V,I_C=0			-0.1	μA
DC Current Transfer Ratio	hFE	V_{CE}= -10V, Ic= -50mA	60		200	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C= -50mA,I_B= -5mA			-0.8	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	I_C= -50mA,I_B= -5mA			-1.0	V
Output Capacitance	Cob	V_{CB}= -30V,f=1MHz		5		pF
Reverse Transfer Capacitance	Cre	V_{CB}= -30V,f=1MHz		4		pF
Gain-Bandwidth Product	f_T	V_{CE}= -30V,I_C= -10mA		70		MHz
Turn-on Time	ton	See test circuit		0.25		μs
Turn-off Time	toff	See test circuit		5		μs

CLASSIFICATION OF hFE

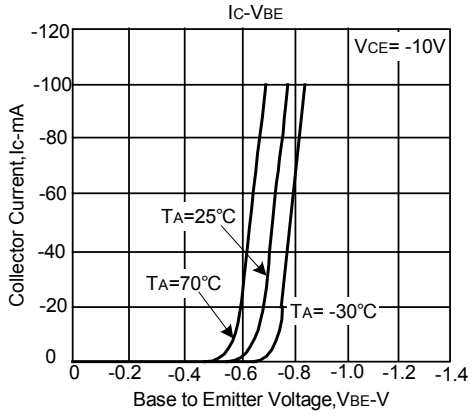
RANK	D	E
RANGE	60-120	100-200

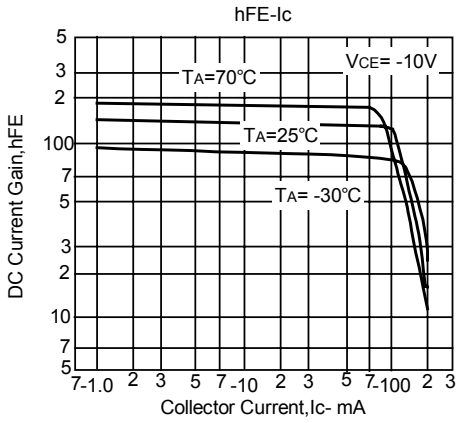
TEST CIRCUIT(Unit : (resistance : Ω, capacitance : F)

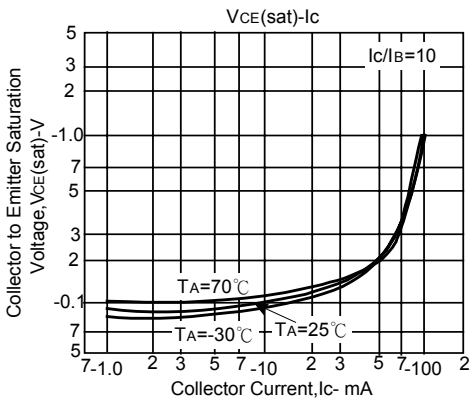


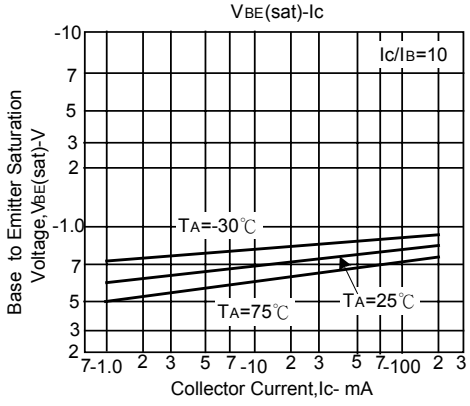
-10IB1= 10IB2=Ic= -50mA
RL=3kΩ,RB=200Ω at Ic= -50mA

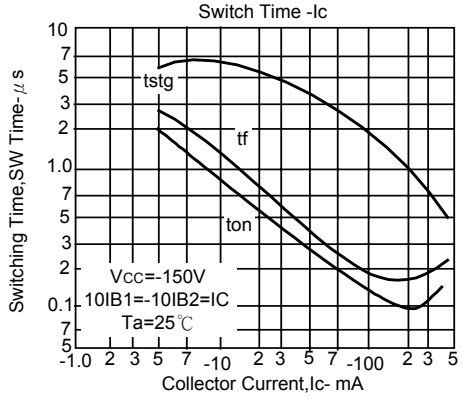
ELECTRICAL CHARACTERISTICS CURVES

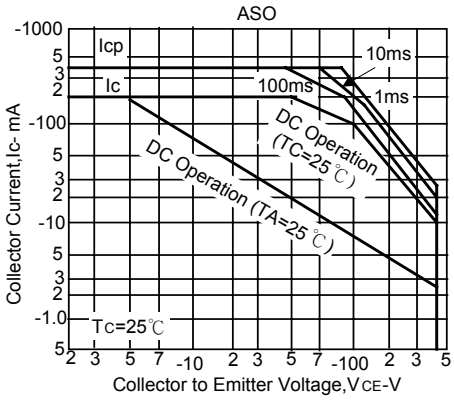


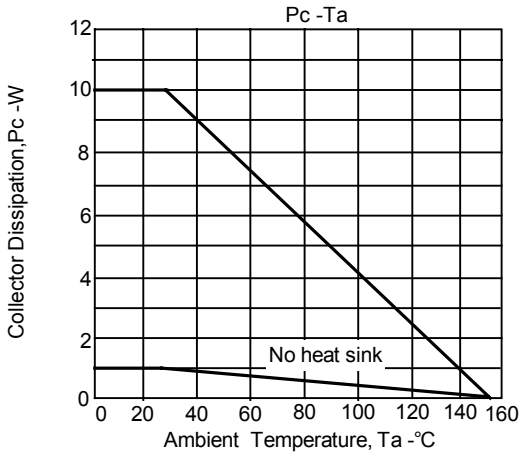



VCE(sat)-Ic
Ic/IB=10
TA=70℃
TA=-30℃
TA=25℃
Collector to Emitter Saturation Voltage,VCE(sat)-V
Collector Current,Ic- mA


VBE(sat)-Ic
Ic/IB=10
TA=-30℃
TA=75℃
TA=25℃
Base to Emitter Saturation Voltage,VBE(sat)-V
Collector Current,Ic- mA


Switch Time -Ic
tstg
tf
ton
VCC=-150V
10IB1=-10IB2=IC
Ta=25℃
Switching Time,SW Time-μs
Collector Current,Ic- mA


ASO
Icp
Ic
10ms
100ms
1ms
DC Operation (TC=25℃)
DC Operation (TA=25℃)
TC=25℃
Collector Current,Ic- mA
Collector to Emitter Voltage,VCE-V


Pc -Ta
No heat sink
Collector Dissipation,Pc -W
Ambient Temperature, Ta -℃

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.