RSG Electronic Components GmbH ▪ Sprendlinger Landstr. 115 ▪ D-63069 Offenbach/Germany
Tel. +49 69 984047-0 ▪ Fax +49 69 984047-77 ▪ info@rsg-electronic.de ▪ **www.rsg-electronic.de**
Änderungen vorbehalten / subject to change without notice

Your right power solution for LCD TV,NB PC & various IT/AV applications

0415B series- Model: 0415B24180

180W 24V/7.5A



Features

- ⊙Best solution for TV 27" ~ 32" & NB
- ⊙Universal AC input
- ⊙Efficiency: 83% @full load typical
- ⊙PFC >0.9 @240VAC
- ⊙High MTBF & Life

Safety

IEC60950

IEC60065

Environmental

Operating Temperature:	5℃ to + 35℃
Storage Temperature:	-20℃ to + 85℃

Electrical specification


INPUT

AC input range	90 ~264VAC
Frequency	47 to 63Hz
Inrush current	150A @230VAC, cold start , 25℃
Input current	2.9A rms @90VAC full load
Efficiency	83% @full load typical
EMI/FRI	FCC part 15, subpart B Class B
	EN55022(CISPR22) Class B
Power saving	<1W/240VAC @ no load
Leakage current	0.35 mA max. @ 240Vac/ 50Hz

OUTPUT

Output rating (V/A)	24V/7.5A
Voltage regulation	22.8 ~ 25.2V
Max. Power (Po)	180W
Hold-up time	10ms. typical at full load ,115VAC
Over voltage protection	32V max. @latch mode
Overload protection	10.0A Max. @shut down
	& auto recovery mode .
Short CKT protection	shut down & auto recovery mode
Over temperature	Optional @shut down mode
Protection	

Outline Drawing (mm)

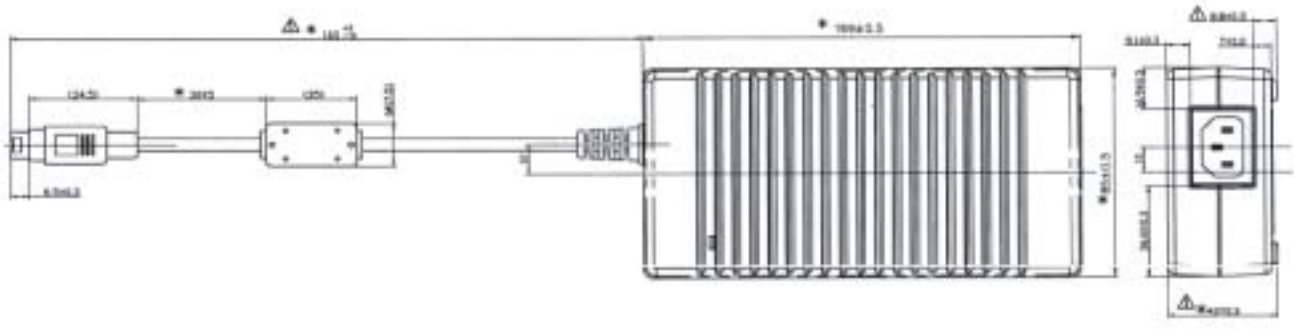

Output DC cable plug: Optional

＊Specifications subject to change without notice.