

IDC

- Industry compatible
- Competitively priced
- Gold Plated contacts
- 2.0mm Pitch

IDC CABLE SOCKET 2mm PITCH






SPECIFICATION

Material & Finish

Contact Material:	Phosphor Bronze
Insulator Material:	PBT & Glass - Fibre Reinforced UL -94V-0
Current Rating:	1 A DC
Contact Resistance:	30mΩ Max
Insulator Resistance:	3000mΩ Min
Dielectric withstanding Voltage:	500v AC for one minute
Operating Temperature:	-40°C to + 105 °C

OUTLINE DRAWING

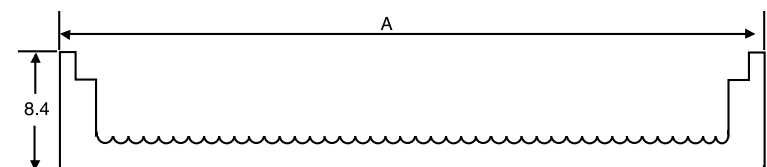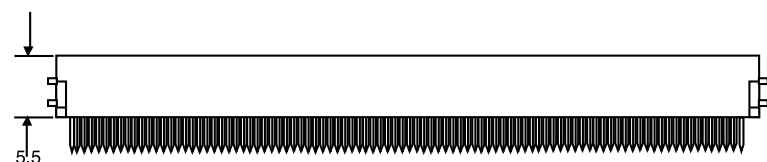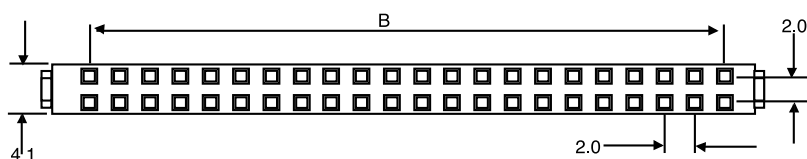

POSITION	A	B
20	25.20	18.00
22	27.20	20.00
24	29.20	22.00
26	31.20	24.00
30	35.20	28.00
34	39.20	32.00
36	41.20	34.00
40	45.20	38.00
44	49.20	42.00
50	55.20	48.00
68	73.20	66.00

ORDERING INFORMATION

DBC	IDC	5	06	A	S	1
Dubilier Connectors	IDC Connectors	Series	Nº of Ways	Contact Material	Contact Plating	Colour
		20=20way	36=36way	Bronze	S =Selective Gold	1=Black
		22=22way	40=40way			
		24=24way	44=44way			
		26=26way	50=50way			
		30=30way	68=68way			
		34=34way				