

EQAX-M20S

OCXO with STRATUM III stability (ACS 8510 Chipset)

DESCRIPTION

The Euroquartz EQAX-M20S OCXO conforms to IEC60679-1, Stratum III, providing a low-noise, stable and reliable source of clock signals.

FEATURES

- Standard leaded package
- Frequency range from 10MHz to 40MHz
- Operating temperature range, -20° to +70°C
- Operable temperature -30° to +75°C
- Supply Voltage 3.3 Volts

SPECIFICATION

Frequency Range:	10.0MHz to 40.0MHz
Standard Frequency:	12.800MHz

Frequency Stability

Initial Tolerance:	±500ppb @ +25°C
Vs. Temperature:	±280ppb -20° ~ +70°C
Vs. Supply Voltage Var:	±50ppb
Vs. Load Change:	±20ppb
Long Term Ageing (1st Year):	±0.8ppm (@40°C after 30 days)
Long Term Stab. (15 Years):	±4.6ppm

RF Output

Signal Waveform:	HCMOS
Load:	15pF
Rise/Fall Time:	10ns maximum
Symmetry (Duty Cycle):	60%/40%
Start-up Time:	4ms

Supply Voltage

Minimum:	+3.13 Volts
Typical:	+3.30 Volts
Maximum:	+3.47 Volts

Current Consumption:	300mA maximum (Steady state) 800mA during warm-up
----------------------	--

Operable Temperature Range:	-30° ~ +75°C
-----------------------------	--------------


Storage Temperature Range:	-40° ~ +85°C
----------------------------	--------------

Enclosure:	As drawing
------------	------------

Weight:	5gm
Packing Type:	Bulk (Tray Pack)

ESD Sensitivity:	1500V minimum (IEC6100-4-2)
------------------	-----------------------------

OUTLINES AND DIMENSIONS

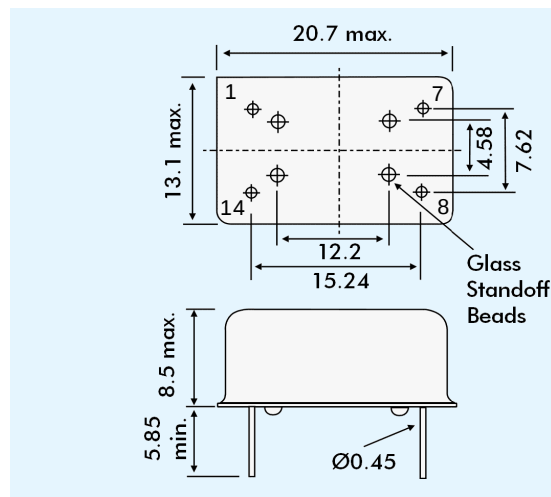

PAD CONNECTIONS

Pad No.	Symbol	Function
1	NC	Not Connected
7	GND	Ground
8	RF OUT	RF Output
14	Vs	Supply Voltage

ENVIRONMENTAL

Test	IEC 60068 Part . .	IEC 61178-1 Clause . .	Test Conditions
Visual inspection, Dimensions		4.5 4.6	Enclosure styles as in IEC 60122-3, if applic.
Sealing tests	2-17	4.8.2	Gross Leak: Test Qc Fine Leak: Test Qk
Solderability, Resistance to soldering heat	2-20	4.8.3	Test Ta (235±5°C), method 1 Test Tb, method 1A, 5s
Shock	2-27	4.8.8	Test Ea, 3x per axis 100g, 6ms 1/2sine
Bump	2-29	4.8.6	Test Eb, 4000 bumps/axis, 40g, 6ms
Free fall	2-32	4.8.9	Test Ed, procedure 1, 2 drops from 1m ht.
Vibration, Sinsoidal	2-6	4.8.7	Test Fc, 30 min/axis, 10Hz-55Hz, 0.75mm; 55Hz -2kHz, 10g
Rapid change of Temperature	2-14	4.8.5	Test Na, 10 cycles at extremes of operating temperature range.
Dry heat	2-2	4.8.11	Test Ba, 16 h at upper temperature.
Damp heat, cyclic	2-30	4.8.12	Test Db variant 1 severity b, 55°C/95%rh
Cold	2-1	4.8.13	Test Aa, 2h at lower temperature indicated by climatic category.
Climatic sequence	1-7	4.8.14	Sequence of 4.8.11, 4.8.12 and 4.8.13
Damp heat, steady state	2-3	4.8.15	Test Ca, 56 days
Endurance tests, - ageing		4.9.1	30 days @ 85°C
- extended ageing		4.9.2	1kh, 2kh, 8kh, @85°C

ORDERING CODE

To order, specify as follows:

FREQUENCY - MODEL

EXAMPLE: **12.800MHz EQAX-M20S**