

FD1000FV-90

HIGH POWER, HIGH FREQUENCY,
PRESS PACK TYPE


FD1000FV-90



- $I_F(AV)$ Average forward current 800A
- V_{RRM} Repetitive peak reverse voltage 3500 ~ 4500V
- Q_{RR} Reverse recovery charge 1500 μ C
- Press pack type

OUTLINE DRAWING

Dimensions in mm

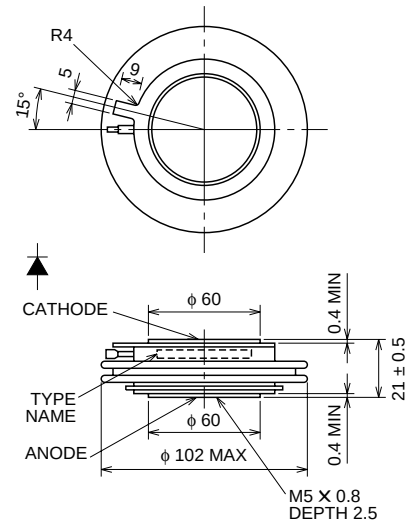

APPLICATION

High-power inverters, Fly-wheel diodes in DC choppers, Power supplies as high frequency rectifiers

MAXIMUM RATINGS

Symbol	Parameter	Voltage class			Unit
		70	80	90	
V_{RRM}	Repetitive peak reverse voltage	3500	4000	4500	V
V_{RSM}	Non-repetitive peak reverse voltage	3500	4000	4500	V
$V_R(DC)$	DC reverse voltage	2800	3200	3600	V

Symbol	Parameter	Conditions	Ratings	Unit
$I_F(RMS)$	RMS forward current		1250	A
$I_F(AV)$	Average forward current	$f = 60\text{Hz}$, sine wave $\theta = 180^\circ$, $T_f = 88^\circ\text{C}$	800	A
I_{FSM}	Surge forward current	One half cycle at 60Hz, non-repetitive	20	kA
I_t^2	Current-squared, time integration	One cycle at 60Hz	1.7×10^6	A ² s
T_j	Junction temperature		-40 ~ +125	°C
T_{stg}	Storage temperature		-40 ~ +150	°C
—	Mounting force required	Recommended value 39.2	26.5 ~ 43.1	kN
—	Weight	Standard value	700	g







ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
I_{RRM}	Repetitive peak reverse current	$T_j = 125^\circ\text{C}$, V_{RRM} Applied	—	—	150	mA
V_{FM}	Forward voltage	$T_j = 125^\circ\text{C}$, $I_{FM} = 2500\text{A}$, Instantaneous measurement	—	—	3.0	V
Q_{RR}	Reverse recovery charge	$I_{FM} = 800\text{A}$, $di_F/dt = -30\text{A}/\mu\text{s}$, $V_R = 150\text{V}$, $T_j = 125^\circ\text{C}$	—	—	1500	μC
$R_{th(j-f)}$	Thermal resistance	Junction to fin	—	—	0.017	°C/W

FD1000FV-90

HIGH POWER, HIGH FREQUENCY,
PRESS PACK TYPE

PERFORMANCE CURVES

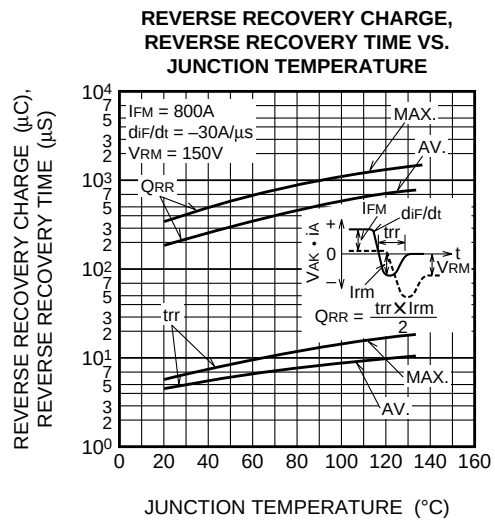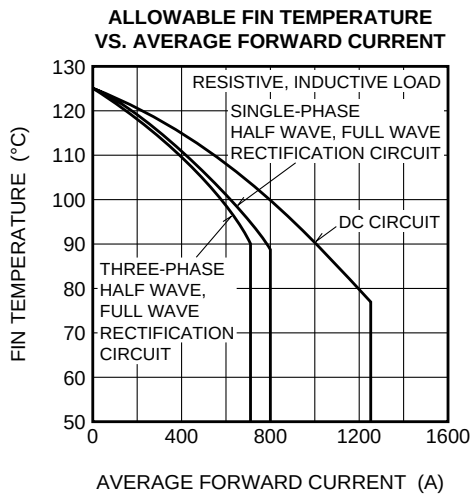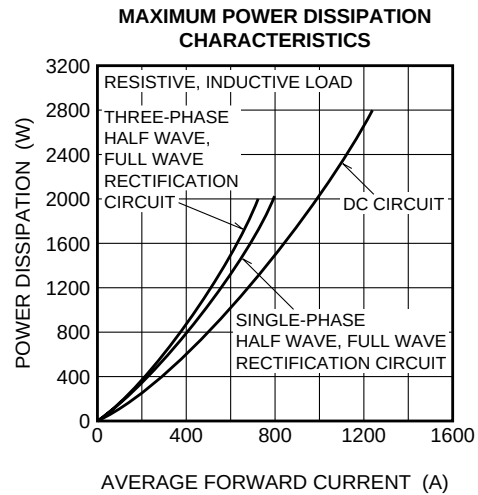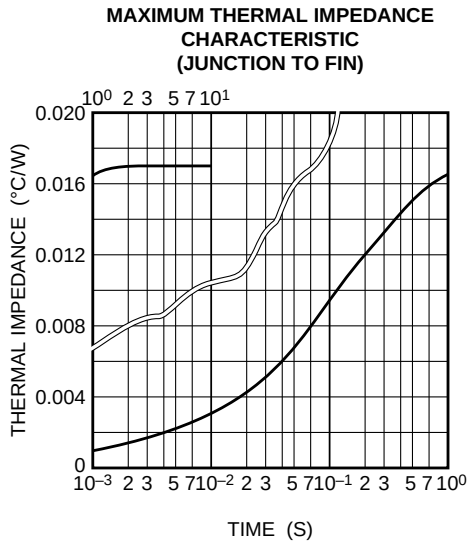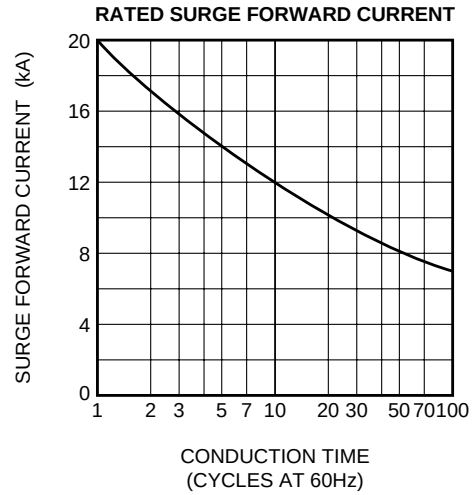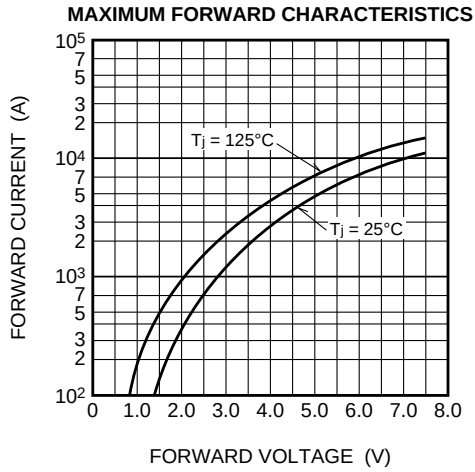

FD1000FV-90

HIGH POWER, HIGH FREQUENCY,
PRESS PACK TYPE

