


A. Electrical Specifications:


P/N	Winding Ratio	Insertion Loss 3dB Max.
SBT203-11	1 : 1	@ 3~300 MHz
SBT203-21	2 : 1	@ 6~400 MHz

B. Dimensions: mm (Inch)

Series	a	b	c	d	e	f	g	h	i	j
SBT203	5.5 (0.217)	4.4 (0.173)	1.5 (0.059)	1.5 (0.059)	3.2 (0.126)	0.5 (0.020)	0.8 (0.031)	3.0 (0.118)	6.2 (0.244)	2.9 (0.114)
Tol.	Max.	Max.	±0.3 (0.012)	±0.3 (0.012)	Max.	±0.15 (0.006)	Typ.	Typ.	Typ.	Typ.

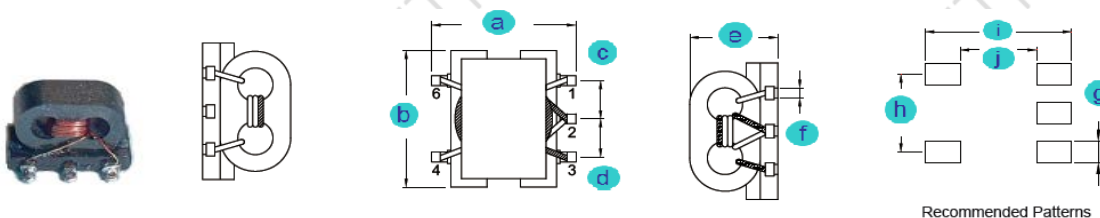

C. Test Circuit:

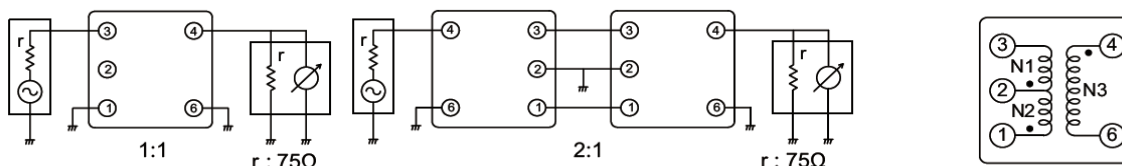

Test Equipment : WILTRON 5411A

D. Features:

- Base pin terminal treated, allowing mounting 'as is' on a PCB.
- MSL: Level 1.

E. Applications:

- Double balance mixers, broad-band transformers, impedance transformers, etc.

F. Characteristic Curve:

