
PLL Oscillator

P/N: PLO3400

Frequency(MHz)	3400
Level(dBm)	+10
Phase Noise(dBc/Hz)	-100 @1KHz
Spurious(dBc)	-75
Frequency Stability(KHz)	± 4 (-10ºC ~ +70ºC)
Power Supply(V/mA)	+12/80
Connector	SMA-Female
Operating Temperature(ºC)	-10 ~ +70

Outline Drawing

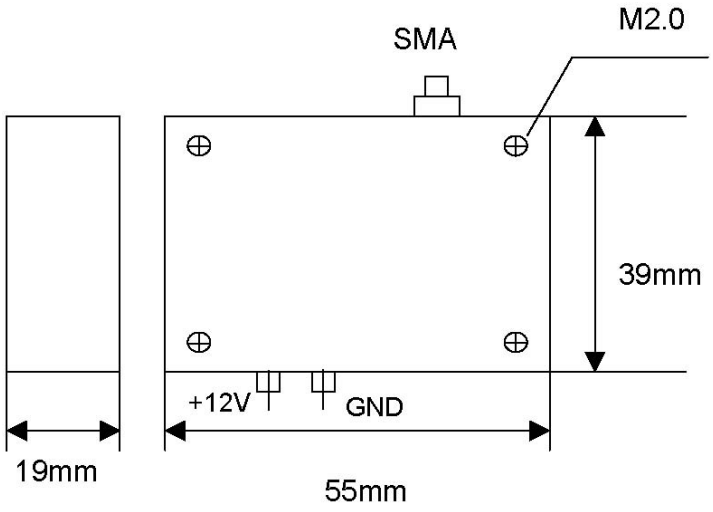

Data subject to change without notice. For current data sheets, please contact: sales@aacix.com