

# Surface Mount Frequency Mixer

# LRMS-1H+ LRMS-1H

Level 17 (LO Power +17dBm) 2 to 500 MHz



CASE STYLE: QQQ130

## Maximum Ratings

|   |                |
|---|----------------|
| Operating Temperature   | -40°C to 85°C  |
| Storage Temperature   | -55°C to 100°C |
| RF Power  | 200mW          |
| IF Current  | 40mA           |
| Permanent damage may occur if any of these limits are exceeded. |                |

## Pin Connections

|        |       |
|--------|-------|
| LO     | 1     |
| RF     | 4     |
| IF     | 5     |
| GROUND | 2,3,6 |

## Features

- low conversion loss, 6.25 dB typ.
- excellent L-R isolation, 44 dB typ.

## Applications

- HF/VHF/UHF
- instrumentation


### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel         |
|-----------|----------------------|
| 7"        | 10, 20, 50, 100, 200 |
| 13"       | 500                  |

## Outline Drawing

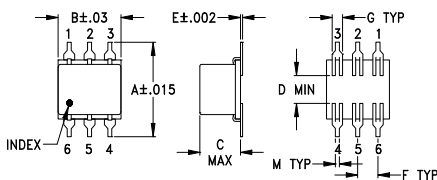


### PCB Land Pattern



## Outline Dimensions (inch/mm)

| A     | B    | C    | D    | E    | F     | G    |
|-------|------|------|------|------|-------|------|
| .400  | .31  | .200 | .10  | .010 | .100  | .050 |
| 10.16 | 7.87 | 5.08 | 2.54 | 0.25 | 2.54  | 1.27 |
| H     | J    | K    | L    | M    | wt    |      |
| .420  | .120 | .060 | .100 | .020 | grams |      |
| 10.67 | 3.05 | 1.52 | 2.54 | 0.51 | 0.55  |      |

## Demo Board MCL P/N: TB-44+ Suggested PCB Layout (PL-083)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Electrical Specifications

| FREQUENCY (MHz) | CONVERSION LOSS (dB) | LO-RF ISOLATION (dB) |    |    | LO-IF ISOLATION (dB) |    |    | IP3 at center band (dBm) |    |    |    |    |    |    |
|-----------------|----------------------|----------------------|----|----|----------------------|----|----|--------------------------|----|----|----|----|----|----|
|                 |                      | L                    | M  | U  | L                    | M  | U  |                          |    |    |    |    |    |    |
| 2-500           | DC-500               | 55                   | 44 | 44 | 25                   | 33 | 20 | 50                       | 34 | 45 | 25 | 37 | 22 | 25 |


1 dB COMP.: +14 dBm typ.

L = low range [ $f_l$  to  $10 f_l$ ] M = mid range [ $10 f_l$  to  $f_u/2$ ] U = upper range [ $f_u/2$  to  $f_u$ ]







## Typical Performance Data

| Frequency (MHz) |        | Conversion Loss (dB) | Isolation L-R (dB) | Isolation L-I (dB) | VSWR RF Port (:1) | VSWR LO Port (:1) |
|-----------------|--------|----------------------|--------------------|--------------------|-------------------|-------------------|
| RF              | LO     | LO +17dBm            | LO +17dBm          | LO +17dBm          | LO +17dBm         | LO +17dBm         |
| 2.00            | 32.00  | 6.78                 | 79.29              | 69.19              | 1.33              | 1.77              |
| 4.00            | 34.00  | 6.60                 | 72.35              | 63.39              | 1.20              | 1.75              |
| 5.00            | 35.00  | 6.57                 | 71.51              | 62.98              | 1.15              | 1.82              |
| 10.00           | 40.00  | 6.55                 | 65.84              | 61.30              | 1.14              | 1.82              |
| 20.00           | 50.00  | 6.48                 | 59.50              | 58.68              | 1.13              | 1.75              |
| 35.20           | 65.20  | 6.36                 | 51.64              | 53.67              | 1.14              | 1.75              |
| 50.00           | 80.00  | 6.53                 | 51.61              | 53.63              | 1.14              | 1.76              |
| 85.00           | 55.00  | 6.47                 | 45.13              | 48.67              | 1.15              | 1.74              |
| 100.00          | 70.00  | 6.48                 | 44.98              | 48.52              | 1.17              | 1.71              |
| 134.80          | 104.80 | 6.32                 | 41.19              | 46.50              | 1.19              | 1.69              |
| 184.60          | 154.60 | 6.35                 | 38.78              | 44.90              | 1.22              | 1.65              |
| 200.00          | 170.00 | 6.40                 | 38.62              | 44.42              | 1.23              | 1.62              |
| 234.40          | 204.40 | 6.30                 | 36.44              | 41.20              | 1.24              | 1.63              |
| 250.00          | 220.00 | 6.22                 | 36.14              | 41.01              | 1.26              | 1.62              |
| 284.20          | 254.20 | 6.22                 | 35.11              | 38.57              | 1.30              | 1.58              |
| 334.00          | 304.00 | 6.18                 | 33.38              | 37.07              | 1.34              | 1.54              |
| 383.80          | 353.80 | 6.11                 | 32.33              | 33.77              | 1.39              | 1.51              |
| 433.60          | 403.60 | 6.16                 | 32.22              | 31.10              | 1.44              | 1.45              |
| 483.40          | 453.40 | 6.45                 | 31.29              | 29.09              | 1.47              | 1.41              |
| 500.00          | 470.00 | 6.45                 | 30.80              | 28.30              | 1.49              | 1.39              |

## Electrical Schematic

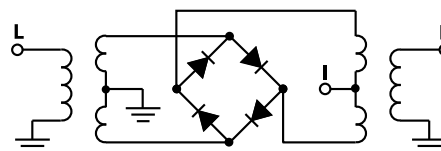

## Performance Charts

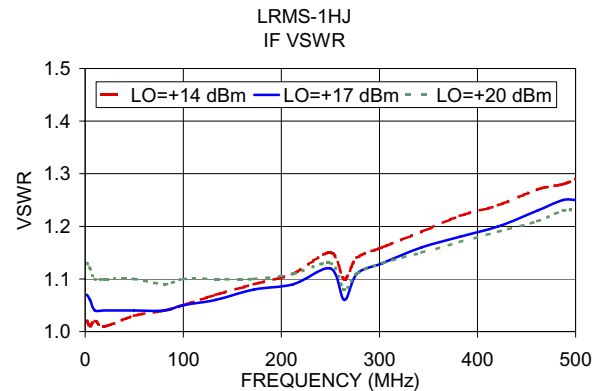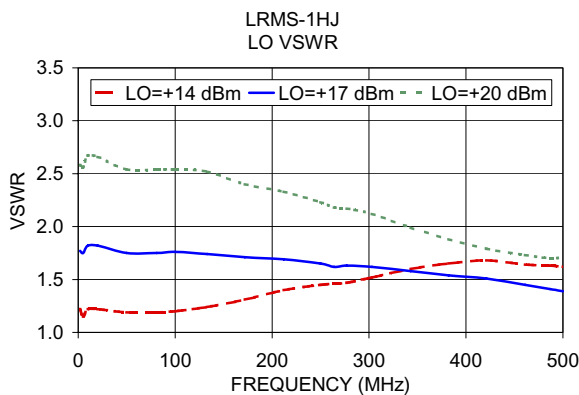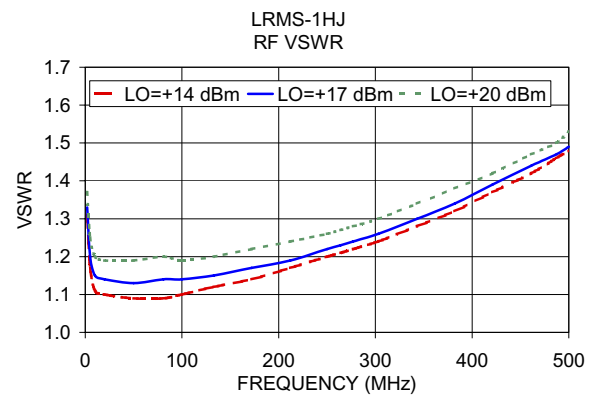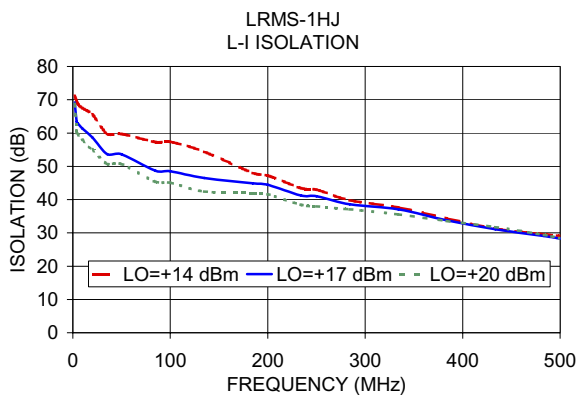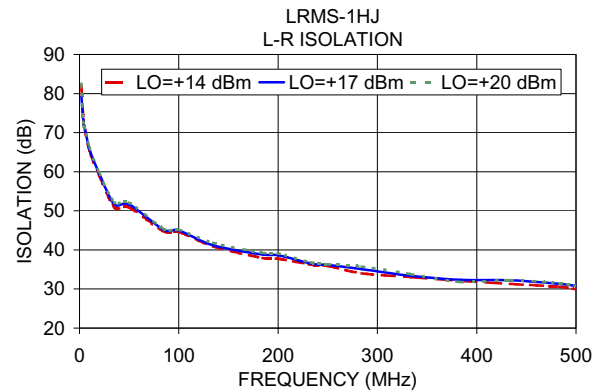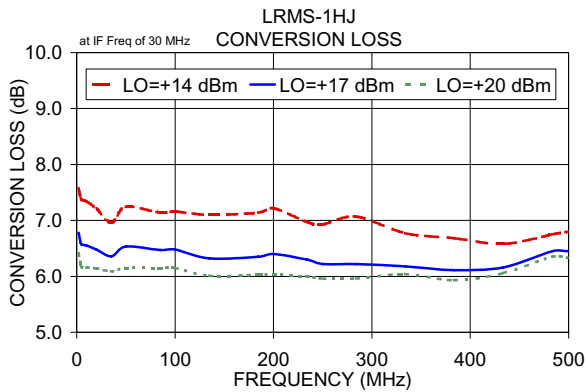

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)