2A SURFACE MOUNT SCHOTTKY BRIDGE

FEATURES:

Reverse Voltage - 40 to 200 V

Forward Current - 2 A

High Surge Current Capability

Designed for Surface Mount Application

MECHANICAL DATA

- Case: ABF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 82mg 0.0029oz

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)



ABF Package

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	TB24F	TB26F	TB28F	TB210F	TB220F	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	60	80	100	200	V
Maximum RMS voltage	V_{RMS}	28	42	56	70	140	V
Maximum DC Blocking Voltage	V_{DC}	40	60	80	100	200	V
Average Rectified Output Current at T_L = 75 °C	$I_{F(AV)}$	2.0					A
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50		40			A
Max Instantaneous Forward Voltage at 2A	V_F	0.55	0.70	0.85			V
Maximum DC Reverse Current T_a = 25°C at Rated DC Reverse Voltage T_a =100°C	I_R	0.5 10			0.3 5		mA
Typical Junction Capacitance [1]	C_j	220	80				pF
Typical Thermal Resistance [2]	$R_{\theta JA}$	75					°C/W
Operating Junction Temperature Range	T_j	-55 ~ +125					°C
Storage Temperature Range	T_{stg}	-55 ~ +150					°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with 4×（5×5mm^2 ） copper pad.

Fig.1 Average Rectified Output Current Derating Curve

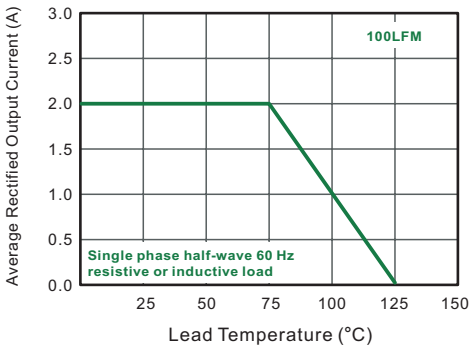


Fig.2 Typical Reverse Characteristics

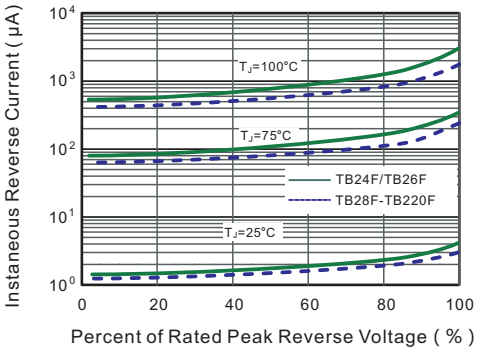


Fig.3 Typical Forward Characteristic

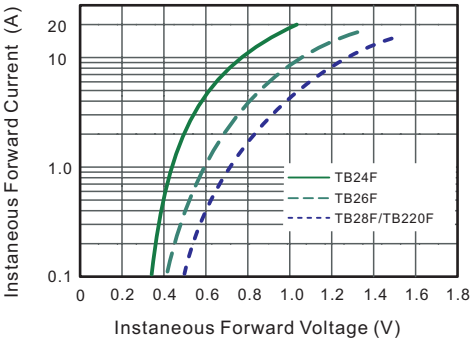


Fig.4 Typical Junction Capacitance



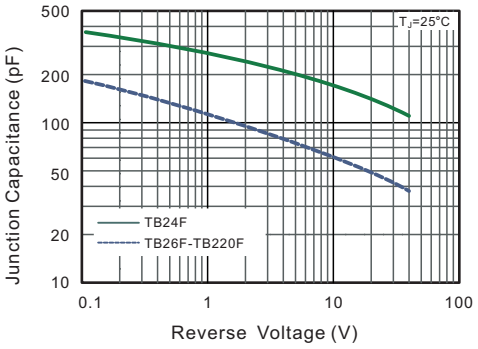


Fig.5 Maximum Non-Repetitive Peak Forward Surage Current

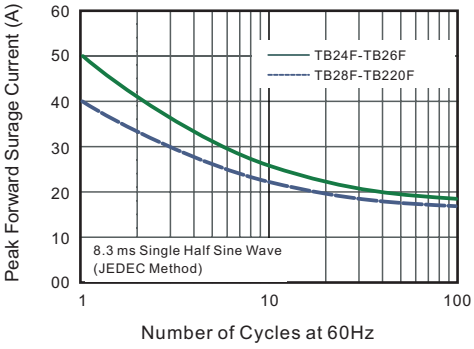

PACKAGE OUTLINE


Plastic surface mounted package; 4 leads ABF

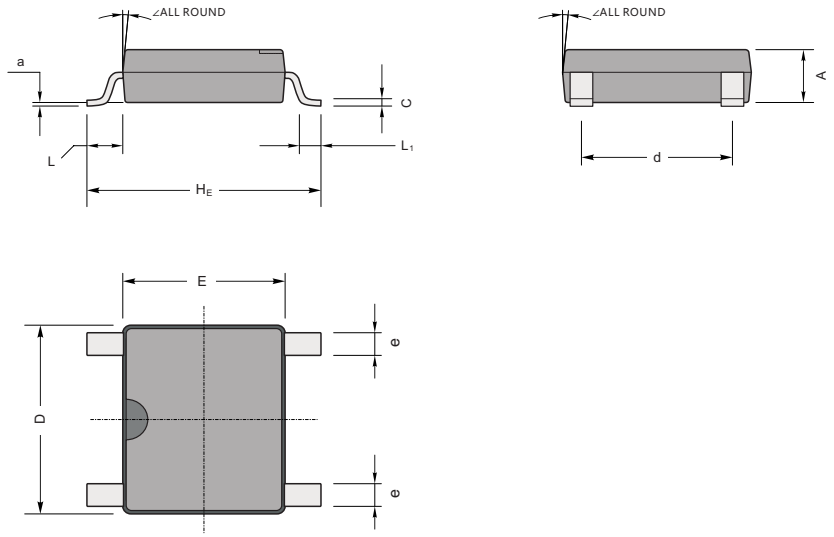

ABF mechanical data

UNIT		A	C	D	E	H_E	d	e	L	L_1	a	∠
mm	max	1.2	0.22	5.2	4.5	6.4	4.2	0.7	0.95	0.6	0.2	7°
	min	1.0	0.15	4.9	4.2	6.0	3.8	0.5				
mil	max	47	8.7	205	177	252	165	28	37	24	4	
	min	39	5.9	193	166	236	150	20				

The recommended mounting pad size

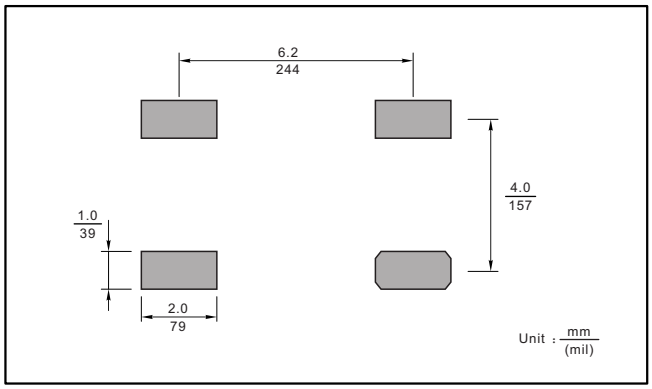

Marking

Type number	Marking code
TB24F	TB24F
TB26F	TB26F
TB28F	TB28F
TB210F	TB210F
TB220F	TB220F

