

TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

- **Organization**
 - TM4xJ64xPU-xx . . . 4194304 × 64 Bits
 - TM8xJ64xPU-xx . . . 8388608 × 64 Bits
- **Single 3.3-V Power Supply** (±10% Tolerance)
- **JEDEC 144-Pin Small-Outline Dual-In-Line Memory Module (SODIMM) Without Buffer for Use With Socket**
- **TM4xJ64xPU-xx — Utilizes Four 64M-Bit High-Speed (4M×16-Bit) Dynamic RAMs**
- **TM4xJ64xPU-xx — Utilizes Eight 64M-Bit High-Speed (4M×16-Bit) Dynamic RAMs**
- **High-Speed, Low-Noise LVTTTL Interface**
- **High-Reliability 50-Lead 400-Mil-Wide Surface-Mount Thin Small-Outline Package (TSOP) (DGE Suffix)**
- **3-State Output**
- **Gold-Plated Contacts**
- **Long Refresh Periods:**
 - TMxEJ64KPU: 64 ms (4096 Cycles)
 - TMxEJ64NPU: 64 ms (8192 Cycles)
 - TMxFJ64KPU: 128 ms (4096 Cycles)
 - TMxFJ64NPU: 128 ms (8192 Cycles)
- **Extended Data Out (EDO) Operation With CAS-Before-RAS (CBR), RAS-Only, and Hidden Refresh**
- **Serial Presence-Detect (SPD) Using EEPROM**
- **Ambient Temperature Range** 0°C to 70°C
- **Performance Ranges**

	ACCESS TIME	ACCESS TIME	ACCESS TIME	EDO CYCLE
	t _{RAC} (MAX)	t _{CAC} (MAX)	t _{AA} (MAX)	t _{HPC} (MIN)
'xxJ64xPU-40	40 ns	11 ns	20 ns	16 ns
'xxJ64xPU-50	50 ns	13 ns	25 ns	20 ns
'xxJ64xPU-60	60 ns	15 ns	30 ns	25 ns

description

The TM4xJ64KPU is a 32M-byte, 144-pin, small-outline dual-in-line memory module (SODIMM). The SODIMM is composed of four TMS465169/P, 4194304 × 16-bit 4K normal or low-power battery-backup refresh EDO dynamic random-access memory (DRAM) devices, each in a 400-mil, 50-pin plastic thin small-outline package (TSOP) (DGE suffix) package mounted on a substrate with decoupling capacitors. See the TMS465169/P data sheet (literature number SMHS566).

The TM4xJ64NPU is a 32M-byte, 144-pin SODIMM. The SODIMM is composed of four TMS464169/P, 4194304 × 16-bit 8K normal or low-power battery-backup refresh EDO DRAMs, each in a 400-mil, 50-pin plastic TSOP (DGE suffix) mounted on a substrate with decoupling capacitors. See the TMS464169/P data sheet (literature number SMHS566).

The TM8xJ64KPU is a 64M-byte, 144-pin SODIMM. The SODIMM is composed of eight TMS465169/P, 4194304 × 16-bit 4K normal or low-power battery-backup refresh EDO DRAMs, each in a 400-mil, 50-pin plastic TSOP (DGE suffix) mounted on a substrate with decoupling capacitors.

The TM8xJ64NPU is a 64M-byte, 144-pin SODIMM. The SODIMM is composed of eight TMS464169/P, 4194304 × 16-bit 8K normal or low-power battery-backup refresh EDO DRAMs, each in a 400-mil, 50-pin plastic TSOP (DGE suffix) mounted on a substrate with decoupling capacitors.

operation

The TM4xJ64xPU operates as four TMS46x169/Ps that are connected as shown in the TMxxJ64xPU functional block diagram. The TM8xJ64xPU operates as eight TMS46x169/Ps that are connected as shown in the TMxxJ64xPU functional block diagram.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



POST OFFICE BOX 1443 • HOUSTON, TEXAS 77251-1443


Copyright © 1997, Texas Instruments Incorporated

PRODUCT PREVIEW

TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

PRODUCT PREVIEW

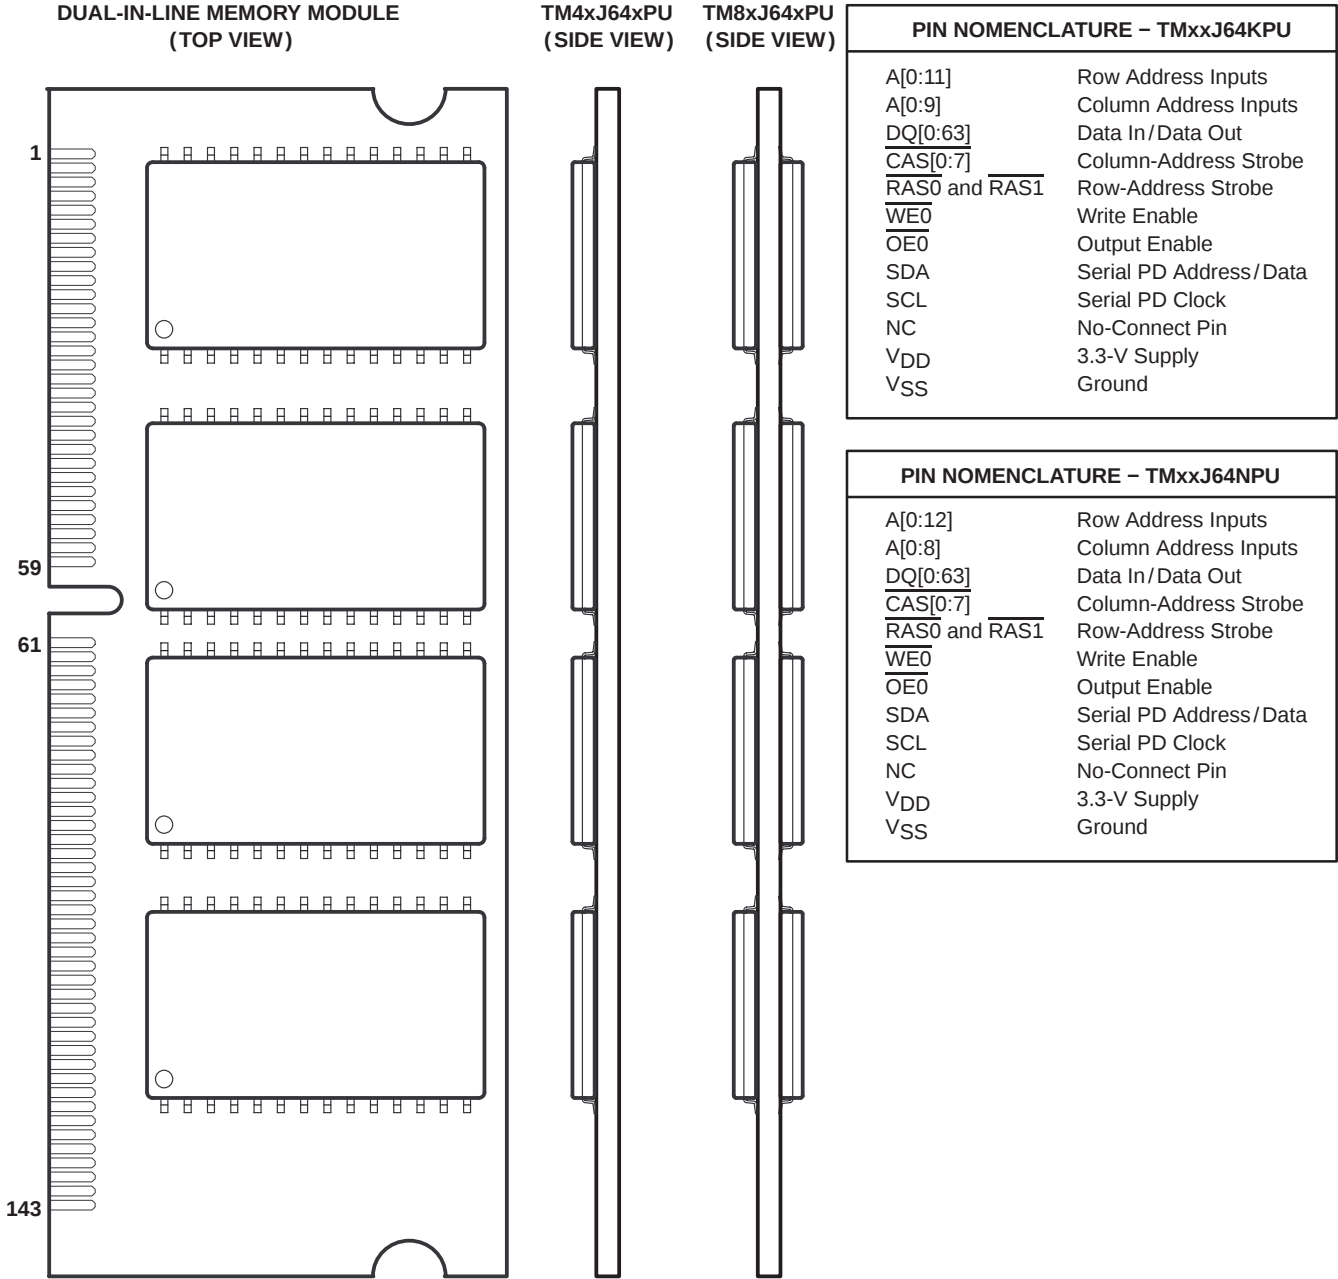

**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

Pin Assignments

NO.	PIN NAME	NO.	PIN NAME	NO.	PIN NAME	NO.	PIN NAME
1	V _{SS}	37	DQ8	73	$\overline{\text{OE}}0$	109	A9
2	V _{SS}	38	DQ40	74	NC	110	A12
3	DQ0	39	DQ9	75	V _{SS}	111	A10
4	DQ32	40	DQ41	76	V _{SS}	112	NC
5	DQ1	41	DQ10	77	NC	113	V _{DD}
6	DQ33	42	DQ42	78	NC	114	V _{DD}
7	DQ2	43	DQ11	79	NC	115	$\overline{\text{CAS}}2$
8	DQ34	44	DQ43	80	NC	116	$\overline{\text{CAS}}6$
9	DQ3	45	V _{DD}	81	V _{DD}	117	$\overline{\text{CAS}}3$
10	DQ35	46	V _{DD}	82	V _{DD}	118	$\overline{\text{CAS}}7$
11	V _{DD}	47	DQ12	83	DQ16	119	V _{SS}
12	V _{DD}	48	DQ44	84	DQ48	120	V _{SS}
13	DQ4	49	DQ13	85	DQ17	121	DQ24
14	DQ36	50	DQ45	86	DQ49	122	DQ56
15	DQ5	51	DQ14	87	DQ18	123	DQ25
16	DQ37	52	DQ46	88	DQ50	124	DQ57
17	DQ6	53	DQ15	89	DQ19	125	DQ26
18	DQ38	54	DQ47	90	DQ51	126	DQ58
19	DQ7	55	V _{SS}	91	V _{SS}	127	DQ27
20	DQ39	56	V _{SS}	92	V _{SS}	128	DQ59
21	V _{SS}	57	NC	93	DQ20	129	V _{DD}
22	V _{SS}	58	NC	94	DQ52	130	V _{DD}
23	$\overline{\text{CAS}}0$	59	NC	95	DQ21	131	DQ28
24	$\overline{\text{CAS}}4$	60	NC	96	DQ53	132	DQ60
25	$\overline{\text{CAS}}1$	61	NC	97	DQ22	133	DQ29
26	$\overline{\text{CAS}}5$	62	NC	98	DQ54	134	DQ61
27	V _{DD}	63	V _{DD}	99	DQ23	135	DQ30
28	V _{DD}	64	V _{DD}	100	DQ55	136	DQ62
29	A0	65	NC	101	V _{DD}	137	DQ31
30	A3	66	NC	102	V _{DD}	138	DQ63
31	A1	67	$\overline{\text{WE}}0$	103	A6	139	V _{SS}
32	A4	68	NC	104	A7	140	V _{SS}
33	A2	69	$\overline{\text{RAS}}0$	105	A8	141	SDA
34	A5	70	NC	106	A11	142	SCL
35	V _{SS}	71	$\overline{\text{RAS}}1$	107	V _{SS}	143	V _{DD}
36	V _{SS}	72	NC	108	V _{SS}	144	V _{DD}

PRODUCT PREVIEW



TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

small-outline dual-in-line memory module and components

The small-outline dual-in-line memory module and components include:


- PC substrate: 1,10 ± 0,1 mm (0.04 inch) nominal thickness
- Bypass capacitors: Multilayer ceramic
- Contact area: Nickel plate and gold plate over copper

The following table shows the SODIMM modules and devices (Ux/UBx) that are used.

Table 1. Component Table

MODULE	DEVICES USED
TM4xJ64xPU	U[0:3]
TM8xJ64xPU	U[0:3], UB[0:3]

functional block diagram for the TMxxJ64xPU

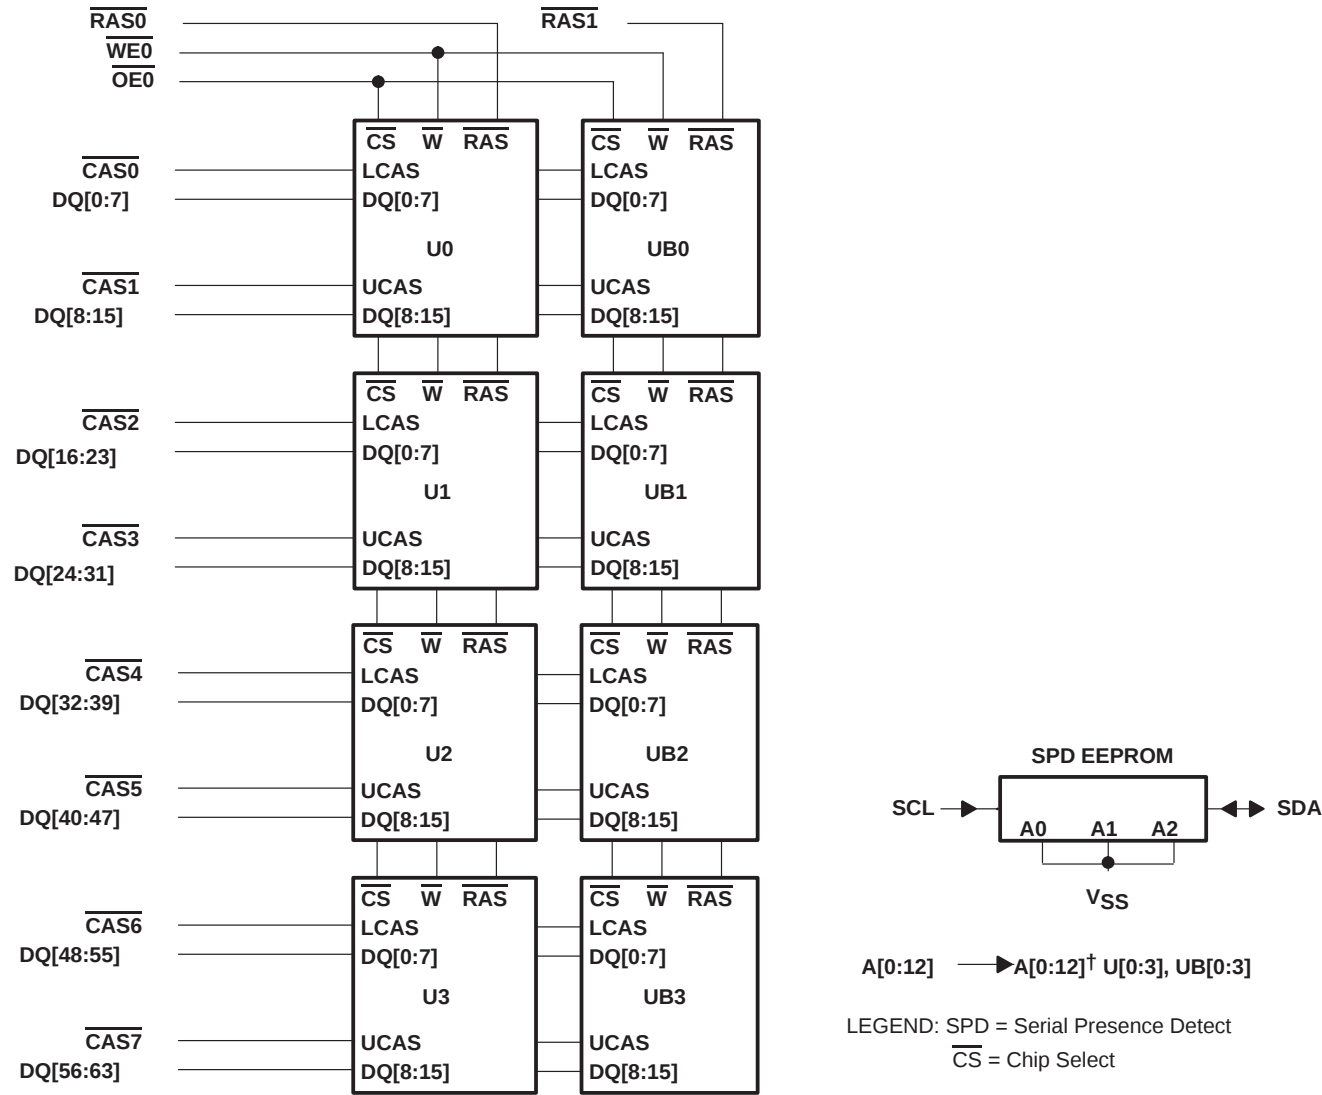

† A12 is not used in TM4xJ64KPU, TM8xP64KPU

**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

absolute maximum ratings over ambient temperature range (unless otherwise noted)[†]

Supply voltage range, V_{DD}	–0.5 V to 4.6 V
Voltage range on any pin (see Note 1)	– 0.5 V to 4.6 V
Short-circuit output current	50 mA
Power dissipation: TM4xJ64xPU	4 W
TM8xJ64xPU	8 W
Ambient temperature range, T_A	0°C to 70°C
Storage temperature range, T_{stg}	– 55°C to 125°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to V_{SS} .

recommended operating conditions

		MIN	NOM	MAX	UNIT
V_{DD}	Supply voltage	3	3.3	3.6	V
V_{SS}	Supply voltage		0		V
V_{IH}	High-level input voltage	2		$V_{DD} + 0.3$	V
V_{IH-SPD}	High-level input voltage for the SPD device	2		5.5	V
V_{IL}	Low-level input voltage	–0.3		0.8	V
T_A	Ambient temperature	0		70	°C

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

**electrical characteristics over recommended ranges of supply voltage and ambient temperature
(unless otherwise noted)**

TM4xJ64KPU

PARAMETER		TEST CONDITIONS†		'4xJ64KPU - 40		'4xJ64KPU - 50		'4xJ64KPU - 60		UNIT
				MIN	MAX	MIN	MAX	MIN	MAX	
V _{OH}	High-level output voltage	I _{OH} = – 2 mA	LVTTL	2.4		2.4		2.4		V
		I _{OH} = – 100 µA	LVC MOS	V _{DD} – 0.2		V _{DD} – 0.2		V _{DD} – 0.2		
V _{OL}	Low-level output voltage	I _{OL} = 2 mA	LVTTL		0.4		0.4		0.4	V
		I _{OL} = 100 µA	LVC MOS		0.2		0.2		0.2	
I _I	Input current (leakage)	V _{DD} = 3.6 V, V _I = 0 V to 3.9 V, All others = 0 V to V _{DD}			± 10		± 10		± 10	µA
I _O	Output current (leakage)	V _{DD} = 3.6 V, V _O = 0 V to V _{DD} , CASx high			± 10		± 10		± 10	µA
I _{CC1} ‡§	Average read- or write-cycle current	V _{DD} = 3.6 V, Minimum cycle			640		520		440	mA
I _{CC2}	Average standby current	V _{IH} = 2 V LVTTL), After one memory cycle, RASx and CASx high			4		4		4	mA
		V _{IH} = V _{DD} – 0.2 V (LVC MOS), After one memory cycle, RASx and CASx high	'4EJ64KPU		2		2		2	mA
			'4FJ64KPU		.6		.6		.6	
I _{CC3} §	RASx-only refresh, average refresh current	V _{DD} = 3.6 V, RASx cycling, Minimum cycle, CASx high			640		520		440	mA
I _{CC4} ‡¶	Average EDO current	V _{DD} = 3.6 V, RASx low, t _{HPC} = MIN, CASx cycling			600		480		400	mA
I _{CC5}	Average CBR refresh current	V _{DD} = 3.6 V, Minimum cycle, RASx low after CASx low			640		520		440	mA
I _{CC6} #	Average self-refresh current	CASx < 0.2 V, RASx < 0.2 V, Measured after t _{RASS} min			1.2		1.2		1.2	mA
I _{CC10} #	Average battery back-up operating current, CBR only	t _{RC} = 31.25 µs, t _{RAS} ≤ 300 ns, V _{DD} – 0.2 V ≤ V _{IH} ≤ 3.9 V, 0 V ≤ V _{IL} ≤ 0.2 V, WE0 and OE0 = V _{IH} , Address and data stable			1.6		1.6		1.6	mA

† For conditions shown as MIN/MAX, use the appropriate value specified in the timing requirements.

‡ Measured with outputs open

§ Measured with a maximum of one address change while RASx = V_{IL}

¶ Measured with a maximum of one address change during each EDO cycle, t_{HPC}

For TM4FJ64KPU only

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

**electrical characteristics over recommended ranges of supply voltage and ambient temperature
(unless otherwise noted) (continued)**

TM4xJ64NPU

PARAMETER		TEST CONDITIONS†		'4xJ64NPU - 40		'4xJ64NPU - 50		'4xJ64NPU - 60		UNIT
				MIN	MAX	MIN	MAX	MIN	MAX	
V _{OH}	High-level output voltage	I _{OH} = - 2 mA	LVTTL	2.4		2.4		2.4		V
		I _{OH} = - 100 μA	LVCMOS	V _{DD} -0.2		V _{DD} -0.2		V _{DD} -0.2		
V _{OL}	Low-level output voltage	I _{OL} = 2 mA	LVTTL	0.4		0.4		0.4		V
		I _{OL} = 100 μA	LVCMOS	0.2		0.2		0.2		
I _I	Input current (leakage)	V _{DD} = 3.6 V, V _I = 0 V to 3.9 V, All others = 0 V to V _{DD}		± 10		± 10		± 10		μA
I _O	Output current (leakage)	V _{DD} = 3.6 V, V _O = 0 V to V _{DD} , CASx high		± 10		± 10		± 10		μA
I _{CC1} ‡§	Average read- or write-cycle current	V _{DD} = 3.6 V, Minimum cycle		540		440		400		mA
I _{CC2}	Average standby current	V _{IH} = 2 V (LVTTL), After one memory cycle, RASx and CASx high		4		4		4		mA
		V _{IH} = V _{DD} - 0.2 V (LVCMOS), After one memory cycle, RAS and CASx high	'4EJ64NPU	2		2		2		mA
			'4FJ64NPU	.6		.6		.6		
I _{CC3} §	RASx-only refresh, average refresh curren	V _{DD} = 3.6 V, RASx cycling, Minimum cycle, CASx high		540		440		400		mA
I _{CC4} †¶	Average EDO current	V _{DD} = 3.6 V, RASx low, t _{HPC} = MIN, CASx cycling		560		440		360		mA
I _{CC5}	Average CBR refresh current	V _{DD} = 3.6 V, Minimum cycle, RASx low after CASx low		640		520		440		mA
I _{CC6} ¶	Average self-refresh current	CASx < 0.2 V, RASx < 0.2 V, Measured after t _{RASS} min		1.2		1.2		1.2		mA
I _{CC10} ¶	Average battery back-up operating current, CBR only	t _{RC} = 31.25 μs, t _{RAS} ≤ 300 ns, V _{DD} - 0.2 V ≤ V _{IH} ≤ 3.9 V, 0 V ≤ V _{IL} ≤ 0.2 V, WE0 and OE0 = V _{IH} , Address and data stable		1.6		1.6		1.6		mA

† For conditions shown as MIN/MAX, use the appropriate value specified in the timing requirements.

‡ Measured with outputs open

§ Measured with a maximum of one address change while RASx = V_{IL}

¶ Measured with a maximum of one address change during each EDO cycle, t_{HPC}

For TM4FJ64NPU only

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

**electrical characteristics over recommended ranges of supply voltage and ambient temperature
(unless otherwise noted) (continued)**

TM8xJ64KPU

PARAMETER		TEST CONDITIONS†		'8xJ64KPU -40		'8xJ64KPU -50		'8xJ64KPU -60		UNIT
				MIN	MAX	MIN	MAX	MIN	MAX	
V _{OH}	High-level output voltage	I _{OH} = – 2 mA	LVTTL	2.4		2.4		2.4		V
		I _{OH} = – 100 µA	LVC MOS	V _{DD} – 0.2		V _{DD} – 0.2		V _{DD} – 0.2		
V _{OL}	Low-level output voltage	I _{OL} = 2 mA	LVTTL		0.4		0.4		0.4	V
		I _{OL} = 100 µA	LVC MOS		0.2		0.2		0.2	
I _I	Input current (leakage)	V _{DD} = 3.6 V, V _I = 0 V to 3.9 V, All others = 0 V to V _{DD}			± 10		± 10		± 10	µA
I _O	Output current (leakage)	V _{DD} = 3.6 V, V _O = 0 V to V _{DD} , CASx high			± 10		± 10		± 10	µA
I _{CC1} ‡§	Average read- or write-cycle current	V _{DD} = 3.6 V, Minimum cycle			644		524		444	mA
I _{CC2}	Average standby current	V _{IH} = 2 V (LVTTL), After one memory cycle, RASx and CASx high			8		8		8	mA
		V _{IH} = V _{DD} – 0.2 V (LVC MOS), After one memory cycle, RASx and CASx high	'8EJ64KPU		4		4		4	mA
			'8FJ64KPU		1.2		1.2		1.2	
I _{CC3} §	RASx-only refresh, average refresh current	V _{DD} = 3.6 V, RASx cycling, Minimum cycle, CASx high			644		524		444	mA
I _{CC4} ‡¶	Average EDO current	V _{DD} = 3.6 V, RASx low, t _{HPC} = MIN, CASx cycling			604		484		404	mA
I _{CC5}	Average CBR refresh current	V _{DD} = 3.6 V, Minimum cycle, RASx low after CASx low			644		524		444	mA
I _{CC6} #	Average self-refresh current	CASx < 0.2 V, RASx < 0.2 V, Measured after t _{RASS} min			2.4		2.4		2.4	mA
I _{CC10} #	Average battery back-up operating current, CBR only	t _{RC} = 31.25 µs, t _{RAS} ≤ 300 ns, V _{DD} – 0.2 V ≤ V _{IH} ≤ 3.9 V, 0 V ≤ V _{IL} ≤ 0.2 V, WE0 and OE0 = V _{IH} , Address and data stable			3.2		3.2		3.2	mA

† For conditions shown as MIN/MAX, use the appropriate value specified in the timing requirements.

‡ Measured with outputs open

§ Measured with a maximum of one address change while RASx = V_{IL}

¶ Measured with a maximum of one address change during each EDO cycle, t_{HPC}

For TM8FJ64KPU only

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

**electrical characteristics over recommended ranges of supply voltage and ambient temperature
(unless otherwise noted) (continued)**

TM8xJ64NPU

PARAMETER		TEST CONDITIONS†		'8xJ64NPU - 40		'8xJ64NPU - 50		'8xJ64NPU - 60		UNIT
				MIN	MAX	MIN	MAX	MIN	MAX	
V _{OH}	High-level output voltage	I _{OH} = − 2 mA	LVTTL	2.4		2.4		2.4		V
		I _{OH} = − 100 μA	LVC MOS	V _{DD} − 0.2		V _{DD} − 0.2		V _{DD} − 0.2		
V _{OL}	Low-level output voltage	I _{OL} = 2 mA	LVTTL	0.4		0.4		0.4		V
		I _{OL} = 100 μA	LVC MOS	0.2		0.2		0.2		
I _I	Input current (leakage)	V _{DD} = 3.6 V, V _I = 0 V to 3.9 V, All others = 0 V to V _{DD}		± 10		± 10		± 10		μA
I _O	Output current (leakage)	V _{DD} = 3.6 V, V _O = 0 V to V _{DD} , CASx high		± 10		± 10		± 10		μA
I _{CC1} ‡§	Average read- or write-cycle current	V _{DD} = 3.6 V, Minimum cycle		544		444		404		mA
I _{CC2}	Average standby current	V _{IH} = 2 V (LVTTL), After one memory cycle, RASx and CASx high		8		8		8		mA
		V _{IH} = V _{DD} − 0.2 V (LVC MOS), After one memory cycle, RASx and CASx high	'8EJ64NPU	4		4		4		mA
			'8FJ64NPU	1.2		1.2		1.2		
I _{CC3} §	RASx-only refresh, average refresh curren	V _{DD} = 3.6 V, RASx cycling, Minimum cycle, CASx high		544		444		404		mA
I _{CC4} †¶	Average EDO current	V _{DD} = 3.6 V, RASx low, t _{HPC} = MIN, CASx cycling		564		444		364		mA
I _{CC5}	Average CBR refresh current	V _{DD} = 3.6 V, Minimum cycle, RASx low after CASx low		644		524		444		mA
I _{CC6} ¶	Average self-refresh current	CASx < 0.2 V, RASx < 0.2 V, Measured after t _{RASS} min		2.4		2.4		2.4		mA
I _{CC10} ¶	Average battery back-up operating current, CBR only	t _{RC} = 31.25 μs, t _{RAS} ≤ 300 ns, V _{DD} − 0.2 V ≤ V _{IH} ≤ 3.9 V, 0 V ≤ V _{IL} ≤ 0.2 V, WE0 and OE0 = V _{IH} , Address and data stable		3.2		3.2		3.2		mA

† For conditions shown as MIN/MAX, use the appropriate value specified in the timing requirements.

‡ Measured with outputs open

§ Measured with a maximum of one address change while RAS = V_{IL}

¶ Measured with a maximum of one address change during each EDO cycle, t_{HPC}

For TM8FJ64NPU only

PRODUCT PREVIEW



TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

capacitance over recommended ranges of supply voltage and ambient temperature,
f = 1 MHz (see Note 2)

PARAMETER		'4xJ64xPU		'8xJ64xPU		UNIT
		MIN	MAX	MIN	MAX	
C _i (A)	Input capacitance, A0–A12		22		42	pF
C _i (OE)	Input capacitance, $\overline{OE0}$		16		30	pF
C _i (CAS)	Input capacitance, $\overline{CASx}$		9		9	pF
C _i (RAS)	Input capacitance, $\overline{RASx}$		16		16	pF
C _i (W)	Input capacitance, $\overline{WE0}$		16		30	pF
C _o	Output capacitance		9		16	pF
C _{i/o} (SDA)	Input/output capacitance, SDA input		9		9	pF
C _i (SPD)	Input capacitance, SPD inputs (except SDA)		7		7	pF

NOTE 2: V_{DD} = NOM supply voltage ±10%, and the bias on pins under test is 0 V.

switching characteristics over recommended ranges of supply voltage and ambient temperature
(see Note 3)

PARAMETER		'xxJ64xPU-40		'xxJ64xPU-50		'xxJ64xPU-60		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
t _{AA}	Access time from column address (see Note 4)		20		25		30	ns
t _{CAC}	Access time from $\overline{CASx}$ (see Note 4)		11		13		15	ns
t _{CPA}	Access time from $\overline{CASx}$ precharge (see Note 4)		22		28		35	ns
t _{RAC}	Access time from $\overline{RASx}$ (see Note 4)		40		50		60	ns
t _{OEA}	Access time from $\overline{OE0}$ (see Note 4)		11		13		15	ns
t _{CLZ}	Delay time, $\overline{CASx}$ to output in the low-impedance state	0		0		0		ns
t _{OEZ}	Output buffer turnoff delay from $\overline{OE0}$ (see Note 5)	3	11	3	13	3	15	ns
t _{REZ}	Output buffer turnoff delay from $\overline{RASx}$ (see Note 5)	3	11	3	13	3	15	ns
t _{CEZ}	Output buffer turnoff delay from $\overline{CASx}$ (see Note 5)	3	11	3	13	3	15	ns
t _{WEZ}	Output buffer turnoff delay from $\overline{WE0}$ (see Note 5)	3	11	3	13	3	15	ns

NOTES: 3. With ac parameters, it is assumed that t_T = 2 ns.

4. Access times are measured with output reference levels of V_{OH} = 2 V and V_{OL} = 0.8 V.

5. The MAX specifications of t_{REZ}, t_{CEZ}, t_{WEZ} and t_{OEZ} are specified when the output is no longer driven. Data-in should not be driven until one of the applicable maximum specifications is satisfied.

EDO timing requirements (see Note 3)

		'xxJ64xPU-40		'xxJ64xPU-50		'xxJ64xPU-60		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
t _{HPC}	Cycle time, EDO page-mode read or write		16		20		25	ns
t _{PRWC}	Cycle time, EDO read-write		47		57		68	ns
t _{CSH}	Delay time, $\overline{RASx}$ active to $\overline{CASx}$ precharge		32		40		48	ns
t _{CHO}	Hold time, $\overline{OE0}$ from $\overline{CASx}$		5		5		5	ns
t _{DOH}	Hold time, output from $\overline{CASx}$ active		5		5		5	ns
t _{CAS}	Pulse duration, $\overline{CASx}$ active (see Note 6)	6	10000	8	10000	10	10000	ns
t _{WPE}	Pulse duration, $\overline{WE0}$ (output disable only)		5		5		5	ns
t _{CP}	Pulse duration, $\overline{CASx}$ precharge		6		8		10	ns
t _{OCH}	Setup time, $\overline{OE0}$ before $\overline{CASx}$		5		5		5	ns
t _{OEP}	Precharge time, $\overline{OE0}$ (output disable only)		5		5		5	ns

NOTES: 3. With ac parameters, it is assumed that t_T = 2 ns.

6. In a read-write cycle, t_{CWD} and t_{CWL} must be observed.

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

ac timing requirements (see Note 3)

		'xxJ64xPU -40		'xxJ64xPU - 50		'xxJ64xPU - 60		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
t _{RC}	Cycle time, read	69		84		104		ns
t _{RWC}	Cycle time, read-write	92		111		135		ns
t _{RASP}	Pulse duration, $\overline{\text{RASx}}$ active, page mode (see Note 7)	40	100 000	50	100 000	60	100 000	ns
t _{RAS}	Pulse duration, RASx active, nonpage mode (see Note 7)	40	10 000	50	10 000	60	10 000	ns
t _{RP}	Pulse duration, RASx precharge	25		30		40		ns
t _{WP}	Pulse duration, write command	6		8		10		ns
t _{ASC}	Setup time, column address	0		0		0		ns
t _{ASR}	Setup time, row address	0		0		0		ns
t _{DS}	Setup time, data in (see Note 8)	0		0		0		ns
t _{RCS}	Setup time, read command	0		0		0		ns
t _{CWL}	Setup time, write command before $\overline{\text{CASx}}$ precharge	6		8		10		ns
t _{RWL}	Setup time, write command before $\overline{\text{RASx}}$ precharge	6		8		10		ns
t _{WCS}	Setup time, write command before $\overline{\text{CASx}}$ active (early-write only)	0		0		0		ns
t _{WRP}	Setup time, write before $\overline{\text{RASx}}$ active (CBR refresh only)	5		5		5		ns
t _{CSR}	Setup time, $\overline{\text{CASx}}$ referenced to $\overline{\text{RASx}}$ (CBR refresh only)	5		5		5		ns
t _{CAH}	Hold time, column address	6		8		10		ns
t _{DH}	Hold time, data in (see Note 8)	6		8		10		ns
t _{RAH}	Hold time, row address	6		8		10		ns
t _{RCH}	Hold time, read command referenced to $\overline{\text{CASx}}$ (see Note 9)	0		0		0		ns
t _{RRH}	Hold time, read command referenced to $\overline{\text{RASx}}$ (see Note 9)	0		0		0		ns
t _{WCH}	Hold time, write command during $\overline{\text{CASx}}$ active (early-write only)	6		8		10		ns
t _{RHCP}	Hold time, $\overline{\text{RASx}}$ active from $\overline{\text{CASx}}$ precharge	22		28		35		ns
t _{OEH}	Hold time, $\overline{\text{OE0}}$ command	11		13		15		ns
t _{ROH}	Hold time, $\overline{\text{RASx}}$ referenced to $\overline{\text{OE0}}$	6		8		10		ns
t _{WRH}	Hold time, write after $\overline{\text{RASx}}$ active (CBR refresh only)	6		8		10		ns
t _{CHS}	Hold time, $\overline{\text{CASx}}$ active after $\overline{\text{RASx}}$ precharge (self-refresh)	– 50		– 50		– 50		ns
t _{AWD}	Delay time, column address to write command (read-write only)	35		42		49		ns
t _{CHR}	Delay time, $\overline{\text{CASx}}$ referenced to $\overline{\text{RASx}}$ (CBR refresh only)	6		8		10		ns
t _{CRP}	Delay time, $\overline{\text{CASx}}$ precharge to $\overline{\text{RASx}}$	5		5		5		ns
t _{CWD}	Delay time, $\overline{\text{CASx}}$ to write command (read-write operation only)	26		30		34		ns

- NOTES: 3. With ac parameters, it is assumed that $t_T = 2$ ns.
7. In a read-write cycle, t_{RWD} and t_{RWL} must be observed.
8. Referenced to the later of CASx or WE0 in write operations
9. Either t_{RRH} or t_{RCH} must be satisfied for a read cycle.

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

ac timing requirements (see Note 3) (continued)

		'xxJ64xPU -40		'xxJ64xPU - 50		'xxJ64xPU - 60		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
t _{OE}	Delay time, $\overline{OE}$ to data in	11		13		15		ns
t _{RAD}	Delay time, $\overline{RAS}$ to column address (see Note 10)	8	20	10	25	12	30	ns
t _{RAL}	Delay time, column address to $\overline{RAS}$ precharge	20		25		30		ns
t _{CAL}	Delay time, column address to $\overline{CAS}$ precharge	12		15		18		ns
t _{RCD}	Delay time, $\overline{RAS}$ to $\overline{CAS}$ (see Note 10)	10	29	12	37	14	45	ns
t _{RPC}	Delay time, $\overline{RAS}$ precharge to $\overline{CAS}$	5		5		5		ns
t _{RSH}	Delay time, $\overline{CAS}$ active to $\overline{RAS}$ precharge	6		8		10		ns
t _{RWD}	Delay time, $\overline{RAS}$ active to write command (read-write only)	55		67		79		ns
t _{CPW}	Delay time, $\overline{CAS}$ precharge to write command (read-write only)	37		45		54		ns
t _{RASS}	Pulse duration, $\overline{RAS}$ active, self-refresh (see Note 11)	100		100		100		μs
t _{RPS}	Pulse duration, $\overline{RAS}$ precharge after self refresh	70		90		110		ns
t _{REF}	Refresh time interval	'xEJ64xPU		64		64		ms
		'xFJ64xPU		128		128		ms
t _T	Transition time	1	50	1	50	1	50	ns

NOTES: 3. With ac parameters, it is assumed that t_T = 2 ns.

10. The maximum value is specified only to assure access time.

11. During the period of 10 μs ≤ t_{RASS} ≤ 100 μs, the device is in transition state from normal operational mode to self-refresh mode.

TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM

SMM5693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect

The serial presence detect (SPD) is contained in a 2K-bit serial EEPROM located on the module. The SPD nonvolatile EEPROM contains various data such as module configuration, DRAM organization, and timing parameters (see tables below). Only the first 128 bytes are programmed by Texas Instruments, while the remaining 128 bytes are available for customer use. Programming is done through an IIC bus using the clock (SCL) and data (SDA) signals. All Texas Instruments modules comply with the current JEDEC SPD Standard. See the *Texas Instruments Serial Presence Detect Technical Reference* (literature number SMMU001) for further details.

Tables in this section list the SPD contents as follows:

Table 2—TM4EJ64KPU	Table 3—TM4EJ64NPU
Table 4—TM8EJ64KPU	Table 5—TM8EJ64NPU
Table 6—TM4FJ64KPU	Table 7—TM4FJ64NPU
Table 8—TM8FJ64KPU	Table 9—TM8FJ64NPU

Table 2. Serial-Presence-Detect Data for the TM4EJ64KPU

BYTE NO.	FUNCTION DESCRIBED	'4EJ64KPU-40		'4EJ64KPU-50		'4EJ64KPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
0	Defines number of bytes written into serial memory during module manufacturing	128 bytes	80h	128 bytes	80h	128 bytes	80h
1	Total number of bytes of SPD memory device	256 bytes	08h	256 bytes	08h	256 bytes	08h
2	Fundamental memory type (FPM, EDO, SDRAM)	EDO	02h	EDO	02h	EDO	02h
3	Number of row addresses on this assembly	12	0Ch	12	0Ch	12	0Ch
4	Number of column addresses on this assembly	10	0Ah	10	0Ah	10	0Ah
5	Number of module banks on this assembly	1 bank	01h	1 bank	01h	1 bank	01h
6	Data width of this assembly	64 bits	40h	64 bits	40h	64 bits	40h
7	Data width continuation		00h		00h		00h
8	Voltage interface standard of this assembly	LVTTL	01h	LVTTL	01h	LVTTL	01h
9	$\overline{\text{RAS}}$ access time of module	$t_{\text{RAC}} = 40 \text{ ns}$	28h	$t_{\text{RAC}} = 50 \text{ ns}$	32h	$t_{\text{RAC}} = 60 \text{ ns}$	3Ch
10	$\overline{\text{CAS}}$ access time of module	$t_{\text{CAC}} = 11 \text{ ns}$	0Bh	$t_{\text{CAC}} = 13 \text{ ns}$	0Dh	$t_{\text{CAC}} = 15 \text{ ns}$	0Fh
11	SODIMM configuration type (non-parity, parity, error correcting code [ECC])	Non-parity	00h	Non-parity	00h	Non-parity	00h
12	Refresh rate/type	15.6 μs	00h	15.6 μs	00h	15.6 μs	00h
13	DRAM width, primary DRAM	x16	10h	x16	10h	x16	10h
14	Error-checking SDRAM data width	N/A	00h	N/A	00h	N/A	00h
62	SPD revision	Rev. 1	01h	Rev. 1	01h	Rev. 1	01h
63	Checksum for bytes 0–62	38	26h	50	32h	62	3Eh

PRODUCT PREVIEW



TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
 TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
 EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect (continued)

Table 2. Serial-Presence-Detect Data for the TM4EJ64KPU (Continued)

BYTE NO.	FUNCTION DESCRIBED	'4EJ64KPU-40		'4EJ64KPU-50		'4EJ64KPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
64–71	Manufacturer's JEDEC ID code per JEP-106E	97h	9700...00h	97h	9700...00h	97h	9700...00h
72	Manufacturing location [†]	TBD		TBD		TBD	
73–90	Manufacturer's part number	TBD		TBD		TBD	
91	Die revision code [†]	TBD		TBD		TBD	
92	PCB revision code [†]	TBD		TBD		TBD	
93–94	Manufacturing date [†]	TBD		TBD		TBD	
95–98	Assembly serial number [†]	TBD		TBD		TBD	
99–125	Manufacturer specific data [†]	TBD		TBD		TBD	
126–127	Vendor specific data [†]	TBD		TBD		TBD	
128–166	System integrator's specific data [‡]	TBD		TBD		TBD	
167–255	Open						

[†] TBD indicates values are determined at manufacturing time and are module dependent.

[‡] These TBD values are determined and programmed by the customer (optional).

**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect (continued)

Table 3. Serial-Presence-Detect Data for the TM4EJ64NPU

BYTE NO.	FUNCTION DESCRIBED	'4EJ64NPU-40		'4EJ64NPU-50		'4EJ64NPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
0	Defines number of bytes written into serial memory during module manufacturing	128 bytes	80h	128 bytes	80h	128 bytes	80h
1	Total number of bytes of SPD memory device	256 bytes	08h	256 bytes	08h	256 bytes	08h
2	Fundamental memory type (FPM, EDO, SDRAM)	EDO	02h	EDO	02h	EDO	02h
3	Number of row addresses on this assembly	13	0Dh	13	0Dh	13	0Dh
4	Number of column addresses on this assembly	9	09h	9	09h	9	09h
5	Number of module banks on this assembly	1 bank	01h	1 bank	01h	1 bank	01h
6	Data width of this assembly	64 bits	40h	64 bits	40h	64 bits	40h
7	Data width continuation		00h		00h		00h
8	Voltage interface standard of this assembly	LVTTL	01h	LVTTL	01h	LVTTL	01h
9	$\overline{\text{RAS}}$ access time of module	$t_{\text{RAC}} = 40 \text{ ns}$	28h	$t_{\text{RAC}} = 50 \text{ ns}$	32h	$t_{\text{RAC}} = 60 \text{ ns}$	3Ch
10	$\overline{\text{CAS}}$ access time of module	$t_{\text{CAC}} = 11 \text{ ns}$	0Bh	$t_{\text{CAC}} = 13 \text{ ns}$	0Dh	$t_{\text{CAC}} = 15 \text{ ns}$	0Fh
11	SODIMM configuration type (non-parity, parity, error correcting code [ECC])	Non-parity	00h	Non-parity	00h	Non-parity	00h
12	Refresh rate/type	15.6 μs	00h	15.6 μs	00h	15.6 μs	00h
13	DRAM width, primary DRAM	x16	10h	x16	10h	x16	10h
14	Error-checking SDRAM data width	N/A	00h	N/A	00h	N/A	00h
62	SPD revision	Rev. 1	01h	Rev. 1	01h	Rev. 1	01h
63	Checksum for bytes 0–62	38	26h	50	32h	62	3Eh
64–71	Manufacturer's JEDEC ID code per JEP-106E	97h	9700...00h	97h	9700...00h	97h	9700...00h
72	Manufacturing location [†]	TBD		TBD		TBD	
73–90	Manufacturer's part number [†]	TBD		TBD		TBD	
91	Die revision code [†]	TBD		TBD		TBD	
92	PCB revision code [†]	TBD		TBD		TBD	
93–94	Manufacturing date [†]	TBD		TBD		TBD	
95–98	Assembly serial number [†]	TBD		TBD		TBD	
99–125	Manufacturer specific data [†]	TBD		TBD		TBD	
126–127	Vendor specific data [†]	TBD		TBD		TBD	
128–166	System integrator's specific data [‡]	TBD		TBD		TBD	
167–255	Open						

[†] TBD indicates values are determined at manufacturing time and are module dependent.

[‡] These TBD values are determined and programmed by the customer (optional).

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect (continued)

Table 4. Serial-Presence-Detect Data for the TM8EJ64KPU

BYTE NO.	FUNCTION DESCRIBED	'8EJ64KPU-40		'8EJ64KPU-50		'8EJ64KPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
0	Defines number of bytes written into serial memory during module manufacturing	128 bytes	80h	128 bytes	80h	128 bytes	80h
1	Total number of bytes of SPD memory device	256 bytes	08h	256 bytes	08h	256 bytes	08h
2	Fundamental memory type (FPM, EDO, SDRAM)	EDO	02h	EDO	02h	EDO	02h
3	Number of row addresses on this assembly	12	0Ch	12	0Ch	12	0Ch
4	Number of column addresses on this assembly	10	0Ah	10	0Ah	10	0Ah
5	Number of module banks on this assembly	2 banks	02h	2 banks	02h	2 banks	02h
6	Data width of this assembly	64 bits	40h	64 bits	40h	64 bits	40h
7	Data width continuation		00h		00h		00h
8	Voltage interface standard of this assembly	LVTTL	01h	LVTTL	01h	LVTTL	01h
9	RASx access time of module	t _{RAC} = 40 ns	28h	t _{RAC} = 50 ns	32h	t _{RAC} = 60 ns	3Ch
10	CASx access time of module	t _{CAC} = 11 ns	0Bh	t _{CAC} = 13 ns	0Dh	t _{CAC} = 15 ns	0Fh
11	SODIMM configuration type (non-parity, parity, error correcting code [ECC])	Non-parity	00h	Non-parity	00h	Non-parity	00h
12	Refresh rate/type	15.6 μs	00h	15.6 μs	00h	15.6 μs	00h
13	DRAM width, primary DRAM	x16	10h	x16	10h	x16	10h
14	Error-checking SDRAM data width	N/A	00h	N/A	00h	N/A	00h
62	SPD revision	Rev. 1	01h	Rev. 1	01h	Rev. 1	01h
63	Checksum for bytes 0–62	39	27h	51	33h	63	3Fh
64–71	Manufacturer's JEDEC ID code per JEP-106E	97h	9700...00h	97h	9700...00h	97h	9700...00h
72	Manufacturing location [†]	TBD		TBD		TBD	
73–90	Manufacturer's part number [†]	TBD		TBD		TBD	
91	Die revision code [†]	TBD		TBD		TBD	
92	PCB revision code [†]	TBD		TBD		TBD	
93–94	Manufacturing date [†]	TBD		TBD		TBD	
95–98	Assembly serial number [†]	TBD		TBD		TBD	
99–125	Manufacturer specific data [†]	TBD		TBD		TBD	
126–127	Vendor specific data [†]	TBD		TBD		TBD	
128–166	System integrator's specific data [†]	TBD		TBD		TBD	
167–255	Open						

[†] TBD indicates values are determined at manufacturing time and are module dependent.

[‡] These TBD values are determined and programmed by the customer (optional).

**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect (continued)

Table 5. Serial-Presence-Detect Data for the TM8EJ64NPU

BYTE NO.	FUNCTION DESCRIBED	8EJ64NPU-40		'8EJ64NPU-50		'8EJ64NPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
0	Defines number of bytes written into serial memory during module manufacturing	128 bytes	80h	128 bytes	80h	128 bytes	80h
1	Total number of bytes of SPD memory device	256 bytes	08h	256 bytes	08h	256 bytes	08h
2	Fundamental memory type (FPM, EDO, SDRAM)	EDO	02h	EDO	02h	EDO	02h
3	Number of row addresses on this assembly	13	0Dh	13	0Dh	13	0Dh
4	Number of column addresses on this assembly	9	09h	9	09h	9	09h
5	Number of module banks on this assembly	2 banks	02h	2 banks	02h	2 banks	02h
6	Data width of this assembly	64 bits	40h	64 bits	40h	64 bits	40h
7	Data width continuation		00h		00h		00h
8	Voltage interface standard of this assembly	LVTTL	01h	LVTTL	01h	LVTTL	01h
9	$\overline{\text{RAS}}$ access time of module	$t_{\text{RAC}} = 40 \text{ ns}$	28h	$t_{\text{RAC}} = 50 \text{ ns}$	32h	$t_{\text{RAC}} = 60 \text{ ns}$	3Ch
10	$\overline{\text{CAS}}$ access time of module	$t_{\text{CAC}} = 11 \text{ ns}$	0Bh	$t_{\text{CAC}} = 13 \text{ ns}$	0Dh	$t_{\text{CAC}} = 15 \text{ ns}$	0Fh
11	SODIMM configuration type (non-parity, parity, error correcting code [ECC])	Non-parity	00h	Non-parity	00h	Non-parity	00h
12	Refresh rate/type	15.6 μs	00h	15.6 μs	00h	15.6 μs	00h
13	DRAM width, primary DRAM	x16	10h	x16	10h	x16	10h
14	Error-checking SDRAM data width	N/A	00h	N/A	00h	N/A	00h
62	SPD revision	Rev. 1	01h	Rev. 1	01h	Rev. 1	01h
63	Checksum for bytes 0–62	39	27h	51	33h	63	3Fh
64–71	Manufacturer's JEDEC ID code per JEP-106E	97h	9700...00h	97h	9700...00h	97h	9700...00h
72	Manufacturing location [†]	TBD		TBD		TBD	
73–90	Manufacturer's part number [†]	TBD		TBD		TBD	
91	Die revision code [†]	TBD		TBD		TBD	
92	PCB revision code [†]	TBD		TBD		TBD	
93–94	Manufacturing date [†]	TBD		TBD		TBD	
95–98	Assembly serial number [†]	TBD		TBD		TBD	
99–125	Manufacturer specific data [†]	TBD		TBD		TBD	
126–127	Vendor specific data [†]	TBD		TBD		TBD	
128–166	System integrator's specific data [‡]	TBD		TBD		TBD	
167–255	Open						

[†] TBD indicates values are determined at manufacturing time and are module dependent.

[‡] These TBD values are determined and programmed by the customer (optional).

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect (continued)

Table 6. Serial-Presence-Detect Data for the TM4FJ64KPU

BYTE NO.	FUNCTION DESCRIBED	'4FJ64KPU-40		'4FJ64KPU-50		'4FJ64KPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
0	Defines number of bytes written into serial memory during module manufacturing	128 bytes	80h	128 bytes	80h	128 bytes	80h
1	Total number of bytes of SPD memory device	256 bytes	08h	256 bytes	08h	256 bytes	08h
2	Fundamental memory type (FPM, EDO, SDRAM)	EDO	02h	EDO	02h	EDO	02h
3	Number of row addresses on this assembly	12	0Ch	12	0Ch	12	0Ch
4	Number of column addresses on this assembly	10	0Ah	10	0Ah	10	0Ah
5	Number of module banks on this assembly	1 banks	01h	1 banks	01h	1 banks	01h
6	Data width of this assembly	64 bits	40h	64 bits	40h	64 bits	40h
7	Data width continuation		00h		00h		00h
8	Voltage interface standard of this assembly	LVTTL	01h	LVTTL	01h	LVTTL	01h
9	RASx access time of module	t _{RAC} = 40 ns	28h	t _{RAC} = 50 ns	32h	t _{RAC} = 60 ns	3Ch
10	CASx access time of module	t _{CAC} = 11 ns	0Bh	t _{CAC} = 13 ns	0Dh	t _{CAC} = 15 ns	0Fh
11	SODIMM configuration type (non-parity, parity, error correcting code [ECC])	Non-parity	00h	Non-parity	00h	Non-parity	00h
12	Refresh rate/type	15.6 μs/self-refresh	80h	15.6 μs/self-refresh	80h	15.6 μs/self-refresh	80h
13	DRAM width, primary DRAM	x16	10h	x16	10h	x16	10h
14	Error-checking SDRAM data width	N/A	00h	N/A	00h	N/A	00h
62	SPD revision	Rev. 1	01h	Rev. 1	01h	Rev. 1	01h
63	Checksum for bytes 0–62	166	A6h	178	B2h	190	BEh
64–71	Manufacturer's JEDEC ID code per JEP-106E	97h	9700...00h	97h	9700...00h	97h	9700...00h
72	Manufacturing location [†]	TBD		TBD		TBD	
73–90	Manufacturer's part number [†]	TBD		TBD		TBD	
91	Die revision code [†]	TBD		TBD		TBD	
92	PCB revision code [†]	TBD		TBD		TBD	
93–94	Manufacturing date [†]	TBD		TBD		TBD	
95–98	Assembly serial number [†]	TBD		TBD		TBD	
99–125	Manufacturer specific data [†]	TBD		TBD		TBD	
126–127	Vendor specific data [†]	TBD		TBD		TBD	
128–166	System integrator's specific data [†]	TBD		TBD		TBD	
167–255	Open						

[†] TBD indicates values are determined at manufacturing time and are module dependent.

[‡] These TBD values are determined and programmed by the customer (optional).

**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect (continued)

Table 7. Serial-Presence-Detect Data for the TM4FJ64NPU

BYTE NO.	FUNCTION DESCRIBED	'4FJ64NPU-40		'4FJ64NPU-50		'4FJ64NPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
0	Defines number of bytes written into serial memory during module manufacturing	128 bytes	80h	128 bytes	80h	128 bytes	80h
1	Total number of bytes of SPD memory device	256 bytes	08h	256 bytes	08h	256 bytes	08h
2	Fundamental memory type (FPM, EDO, SDRAM)	EDO	02h	EDO	02h	EDO	02h
3	Number of row addresses on this assembly	13	0Dh	13	0Dh	13	0Dh
4	Number of column addresses on this assembly	9	09h	9	09h	9	09h
5	Number of module banks on this assembly	1 bank	01h	1 bank	01h	1 bank	01h
6	Data width of this assembly	64 bits	40h	64 bits	40h	64 bits	40h
7	Data width continuation		00h		00h		00h
8	Voltage interface standard of this assembly	LVTTL	01h	LVTTL	01h	LVTTL	01h
9	$\overline{\text{RAS}}$ access time of module	$t_{\text{RAC}} = 40 \text{ ns}$	28h	$t_{\text{RAC}} = 50 \text{ ns}$	32h	$t_{\text{RAC}} = 60 \text{ ns}$	3Ch
10	$\overline{\text{CAS}}$ access time of module	$t_{\text{CAC}} = 11 \text{ ns}$	0Bh	$t_{\text{CAC}} = 13 \text{ ns}$	0Dh	$t_{\text{CAC}} = 15 \text{ ns}$	0Fh
11	SODIMM configuration type (non-parity, parity, error correcting code [ECC])	Non-parity	00h	Non-parity	00h	Non-parity	00h
12	Refresh rate/type	15.6 μs /self-refresh	80h	15.6 μs /self-refresh	80h	15.6 μs /self-refresh	80h
13	DRAM width, primary DRAM	x16	10h	x16	10h	x16	10h
14	Error-checking SDRAM data width	N/A	00h	N/A	00h	N/A	00h
62	SPD revision	Rev. 1	01h	Rev. 1	01h	Rev. 1	01h
63	Checksum for bytes 0–62	166	A6h	178	B2h	190	BEh
64–71	Manufacturer's JEDEC ID code per JEP-106E	97h	9700...00h	97h	9700...00h	97h	9700...00h
72	Manufacturing location [†]	TBD		TBD		TBD	
73–90	Manufacturer's part number [†]	TBD		TBD		TBD	
91	Die revision code [†]	TBD		TBD		TBD	
92	PCB revision code [†]	TBD		TBD		TBD	
93–94	Manufacturing date [†]	TBD		TBD		TBD	
95–98	Assembly serial number [†]	TBD		TBD		TBD	
99–125	Manufacturer specific data [†]	TBD		TBD		TBD	
126–127	Vendor specific data [†]	TBD		TBD		TBD	
128–166	System integrator's specific data [†]	TBD		TBD		TBD	
167–255	Open						

[†] TBD indicates values are determined at manufacturing time and are module dependent.

[‡] These TBD values are determined and programmed by the customer (optional).

PRODUCT PREVIEW



**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect (continued)

Table 8. Serial-Presence-Detect Data for the TM8FJ64KPU

BYTE NO.	FUNCTION DESCRIBED	'8FJ64KPU-40		'8FJ64KPU-50		'8FJ64KPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
0	Defines number of bytes written into serial memory during module manufacturing	128 bytes	80h	128 bytes	80h	128 bytes	80h
1	Total number of bytes of SPD memory device	256 bytes	08h	256 bytes	08h	256 bytes	08h
2	Fundamental memory type (FPM, EDO, SDRAM)	EDO	02h	EDO	02h	EDO	02h
3	Number of row addresses on this assembly	12	0Ch	12	0Ch	12	0Ch
4	Number of column addresses on this assembly	10	0Ah	10	0Ah	10	0Ah
5	Number of module banks on this assembly	2 banks	02h	2 banks	02h	2 banks	02h
6	Data width of this assembly	64 bits	40h	64 bits	40h	64 bits	40h
7	Data width continuation		00h		00h		00h
8	Voltage interface standard of this assembly	LVTTL	01h	LVTTL	01h	LVTTL	01h
9	RASx access time of module	t _{RAC} = 40 ns	28h	t _{RAC} = 50 ns	32h	t _{RAC} = 60 ns	3Ch
10	CASx access time of module	t _{CAC} = 11 ns	0Bh	t _{CAC} = 13 ns	0Dh	t _{CAC} = 15 ns	0Fh
11	SODIMM configuration type (non-parity, parity, error correcting code [ECC])	Non-parity	00h	Non-parity	00h	Non-parity	00h
12	Refresh rate/type	15.6 μs/self-refresh	80h	15.6 μs/self-refresh	80h	15.6 μs/self-refresh	80h
13	DRAM width, primary DRAM	x16	10h	x16	10h	x16	10h
14	Error-checking SDRAM data width	N/A	00h	N/A	00h	N/A	00h
62	SPD revision	Rev. 1	01h	Rev. 1	01h	Rev. 1	01h
63	Checksum for bytes 0–62	167	A7h	179	B3h	191	BFh
64–71	Manufacturer's JEDEC ID code per JEP-106E	97h	9700...00h	97h	9700...00h	97h	9700...00h
72	Manufacturing location [†]	TBD		TBD		TBD	
73–90	Manufacturer's part number [†]	TBD		TBD		TBD	
91	Die revision code [†]	TBD		TBD		TBD	
92	PCB revision code [†]	TBD		TBD		TBD	
93–94	Manufacturing date [†]	TBD		TBD		TBD	
95–98	Assembly serial number [†]	TBD		TBD		TBD	
99–125	Manufacturer specific data [†]	TBD		TBD		TBD	
126–127	Vendor specific data [†]	TBD		TBD		TBD	
128–166	System integrator's specific data [†]	TBD		TBD		TBD	
167–255	Open						

[†] TBD indicates values are determined at manufacturing time and are module dependent.

[‡] These TBD values are determined and programmed by the customer (optional).

**TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM**

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

serial presence detect (continued)

Table 9. Serial-Presence-Detect Data for the TM8FJ64NPU

BYTE NO.	FUNCTION DESCRIBED	8FJ64NPU-40		'8FJ64NPU-50		'8FJ64NPU-60	
		ITEM	DATA	ITEM	DATA	ITEM	DATA
0	Defines number of bytes written into serial memory during module manufacturing	128 bytes	80h	128 bytes	80h	128 bytes	80h
1	Total number of bytes of SPD memory device	256 bytes	08h	256 bytes	08h	256 bytes	08h
2	Fundamental memory type (FPM, EDO, SDRAM)	EDO	02h	EDO	02h	EDO	02h
3	Number of row addresses on this assembly	13	0Dh	13	0Dh	13	0Dh
4	Number of column addresses on this assembly	9	09h	9	09h	9	09h
5	Number of module banks on this assembly	2 banks	02h	2 banks	02h	2 banks	02h
6	Data width of this assembly	64 bits	40h	64 bits	40h	64 bits	40h
7	Data width continuation		00h		00h		00h
8	Voltage interface standard of this assembly	LVTTL	01h	LVTTL	01h	LVTTL	01h
9	$\overline{\text{RAS}}$ access time of module	$t_{\text{RAC}} = 40 \text{ ns}$	28h	$t_{\text{RAC}} = 50 \text{ ns}$	32h	$t_{\text{RAC}} = 60 \text{ ns}$	3Ch
10	$\overline{\text{CAS}}$ access time of module	$t_{\text{CAC}} = 19 \text{ ns}$	0Bh	$t_{\text{CAC}} = 13 \text{ ns}$	0Dh	$t_{\text{CAC}} = 15 \text{ ns}$	0Fh
11	DIMM configuration type (non-parity, parity, error correcting code [ECC])	Non-parity	00h	Non-parity	00h	Non-parity	00h
12	Refresh rate/type	15.6 μs /self-refresh	80h	15.6 μs /self-refresh	80h	15.6 μs /self-refresh	80h
13	DRAM width, primary DRAM	x16	10h	x16	10h	x16	10h
14	Error-checking SDRAM data width	N/A	00h	N/A	00h	N/A	00h
62	SPD revision	Rev. 1	01h	Rev. 1	01h	Rev. 1	01h
63	Checksum for bytes 0–62	167	A7h	179	B3h	191	BFh
64–71	Manufacturer's JEDEC ID code per JEP-106E	97h	9700...00h	97h	9700...00h	97h	9700...00h
72	Manufacturing location [†]	TBD		TBD		TBD	
73–90	Manufacturer's part number [†]	TBD		TBD		TBD	
91	Die revision code [†]	TBD		TBD		TBD	
92	PCB revision code [†]	TBD		TBD		TBD	
93–94	Manufacturing date [†]	TBD		TBD		TBD	
95–98	Assembly serial number [†]	TBD		TBD		TBD	
99–125	Manufacturer specific data [†]	TBD		TBD		TBD	
126–127	Vendor specific data [†]	TBD		TBD		TBD	
128–166	System integrator's specific data [†]	TBD		TBD		TBD	
167–255	Open						

[†] TBD indicates values are determined at manufacturing time and are module dependent.

[‡] These TBD values are determined and programmed by the customer (optional).


PRODUCT PREVIEW



TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

device symbolization (TM4EJ64KPU illustrated)

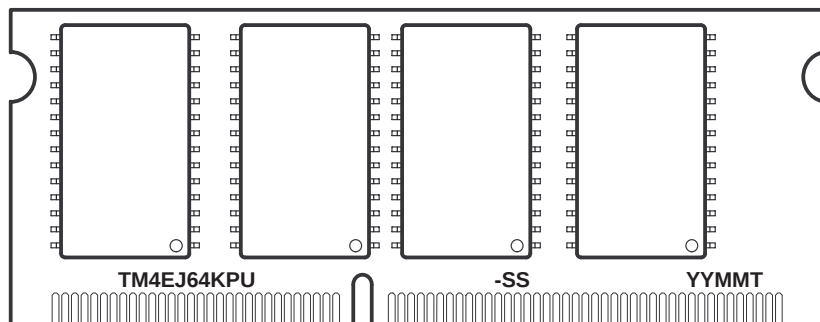

YY = Year Code
 MM = Month Code
 T = Assembly Site Code
 -SS = Speed Code

NOTES: A. Location of symbolization may vary.


TM4EJ64KPU, TM4EJ64NPU, TM4FJ64KPU, TM4FJ64NPU, 4194304 BY 64-BIT
 TM8EJ64KPU, TM8EJ64NPU, TM8FJ64KPU, TM8FJ64NPU, 8388608 BY 64-BIT
 EXTENDED-DATA-OUT DYNAMIC RAM MODULES — SODIMM

SMMS693A – AUGUST 1997 – REVISED NOVEMBER 1997

MECHANICAL DATA

BDM (R-SODIMM-N144)

SMALL OUTLINE DUAL IN-LINE MEMORY MODULE

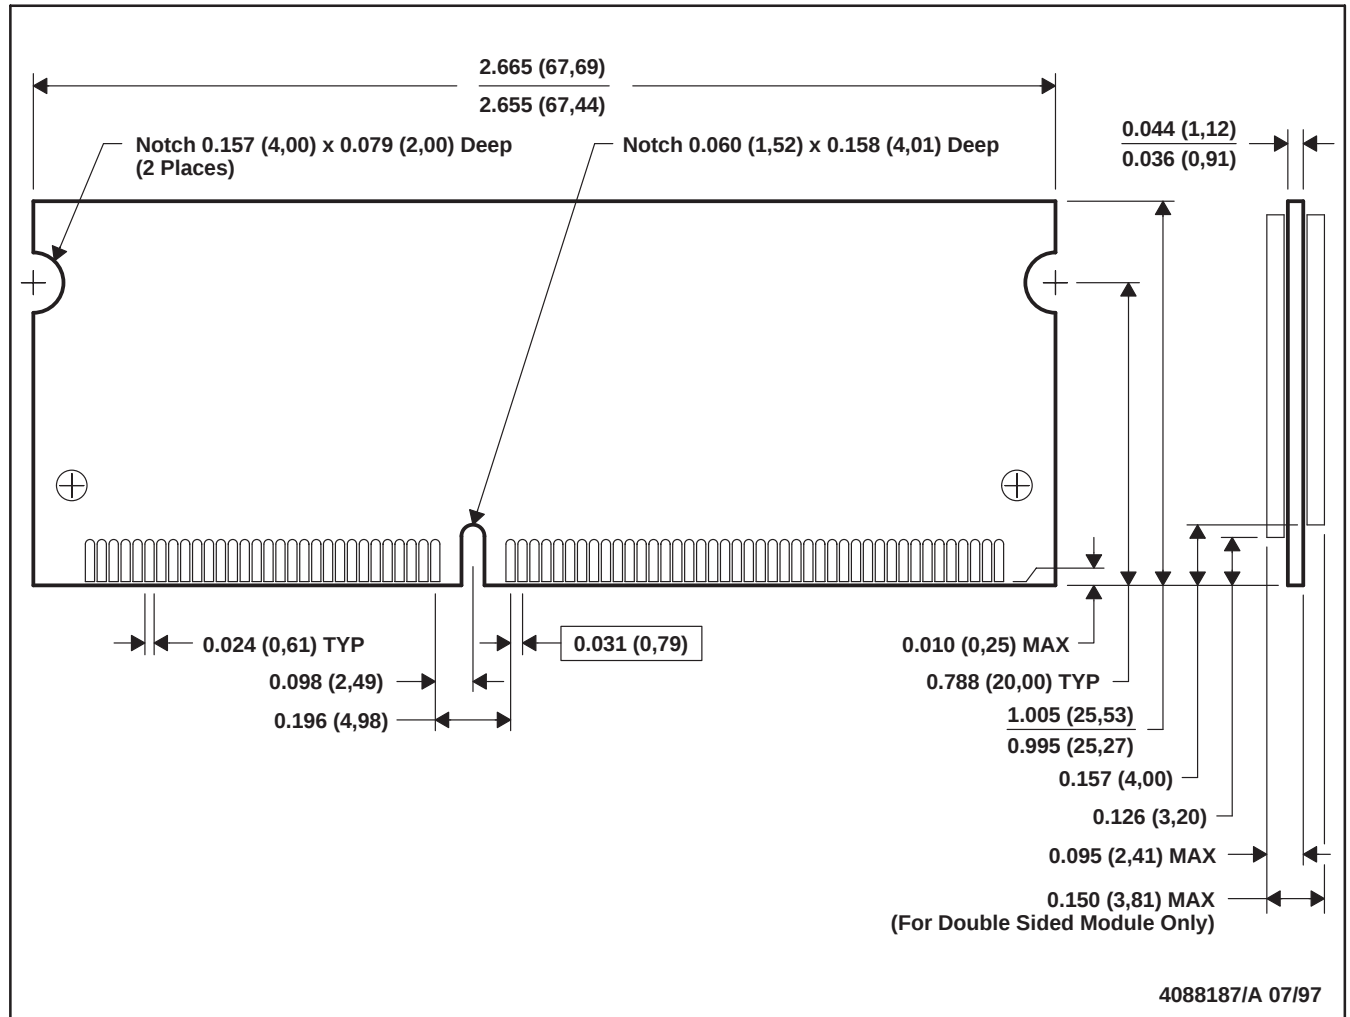

- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. Falls within JEDEC MO-190

PRODUCT PREVIEW

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated