TEMPERATURE SENSOR IC

FEATURES

- **Linear Output Voltage 6 MV/°C Output**
- **Active High On/Off Control**
- **2.7 to 10.0 V Supply Range**
- **Miniature Package (SOT-25)**
- **Minimum External Parts Count**
- **Low Power Consumption**

APPLICATIONS

- **Home and Industrial Thermostats**
- **Automotive Climate Control**
- **Battery Charger Temperature Monitor**
- **Notebook Computer Temperature Monitor**
- **Electronic Thermometers**
- **Fish Finder Water Temperature**
- **Industrial Process Controllers**
- **Home Appliance Temperature Control**

DESCRIPTION

The TK11032 is a temperature sensor IC with a linear output of 6 mV/°C over the range of -30 to + 105 °C. Its wide operating voltage range of 2.7 to 10.0 V makes it suitable for a number of applications requiring accurate temperature control, such as electronic thermostats for climate control, refrigerators, and industrial process controls. The device is in the "on" state when the control pin is pulled to a logic high level.

A typical application is to make a digital representation of temperature with an A/D converter, or to make a thermal detector with a comparator.

The TK11032 has a compensation pin for a 0.1 µF capacitor that ensures stability over the IC's operating temperature range.

The TK11032 is available in a miniature SOT-25 surface mount package.

TK11032



Note: Connect Pin 2 to GND

BLOCK DIAGRAM

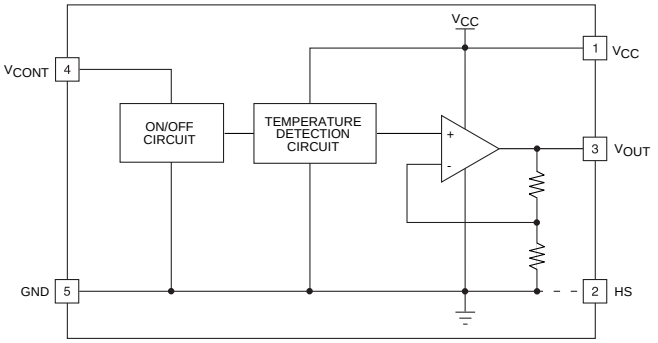

ORDERING INFORMATION

TK11032M □□

Tape/Reel Code

TAPE/REEL CODE
TL: Tape Left

ABSOLUTE MAXIMUM RATINGS

Supply Voltage ..... 12 V
Operating Voltage ..... 2.7 to 10 V
Power Dissipation (Note 1) ..... 150 mW
Junction Temperature ..... 150 °C
Storage Temperature Range ..... -55 to +150 °C
Operating Temperature Range ..... -30 to +105 °C
Lead Soldering Temperature (10 s) ..... 235 °C

TK11032 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{CC} = 3.0 V, V_{CONT} = 2.4 V, I_{OUT} = 0 µA, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{OUT}	Output Voltage	T_A = 25 ° C	1.7712	1.7892	1.8072	V
		T_A = 85 ° C	2.1306	2.1546	2.1786	V
		T_A = -30 ° C		1.4610		V
T_C	Temperature Coefficient	T_A = 25 ° C to 85 ° C	5.61	6.09	6.57	mV/° C
Line Reg	Line Regulation	V_{CC} = 3 to 10 V	-12	3	12	mV
Load Reg	Load Regulation	I_{OUT} = 0 to 400 µA		3	20	mV
I_{CC}	Supply Current			85	150	µA
I_{OUT}	Output Current	$\Delta V_{OUT} \leq$ 20 mV			400	µA
$I_{CC(STBY)}$	Standby Supply Current	$V_{CONT} \leq$ 0.6 V			1	µA
CONTROL TERMINAL SPECIFICATIONS						
$V_{CONT(ON)}$	Control Voltage (ON)	V_{OUT} = 1.7712 to 1.8072 V, Output ON	1.8	2.4	V_{CC}	V
$V_{CONT(OFF)}$	Control Voltage (OFF)	$V_{OUT} \leq$ 0.1 V, Output OFF	GND		0.6	V
I_{CONT}	Control Current			4.5	7.5	µA

Note 1: Power dissipation is 150 mW when mounted as recommended. Derate at 1.2 mW/°C for operation above 25 °C.

TEST CIRCUIT

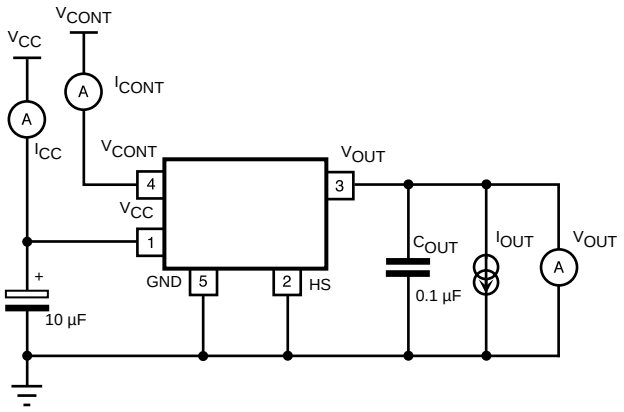

TYPICAL PERFORMANCE CHARACTERISTICS

V_{CC} = 3 V, V_{CONT} = 2.4 V, I_{OUT} = 0 µA, T_A = 25 °C, unless otherwise specified.

OUTPUT VOLTAGE vs. TEMPERATURE

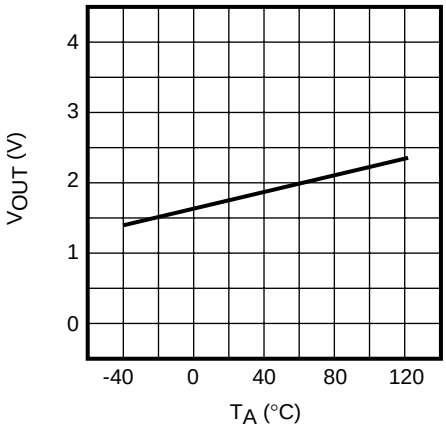

LINEARITY ERROR vs. TEMPERATURE

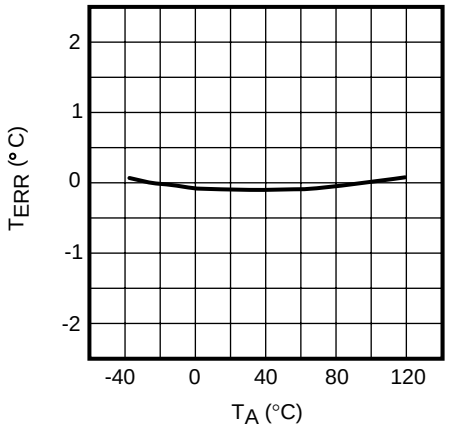

INPUT CURRENT vs. TEMPERATURE

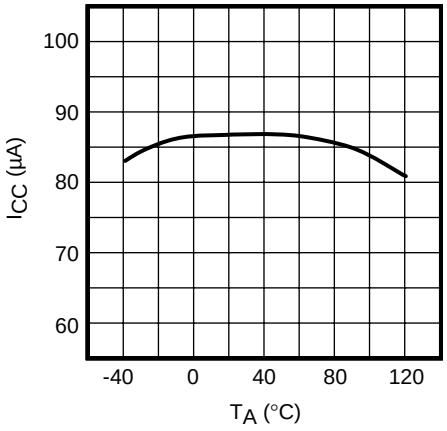

INPUT CURRENT vs. INPUT VOLTAGE

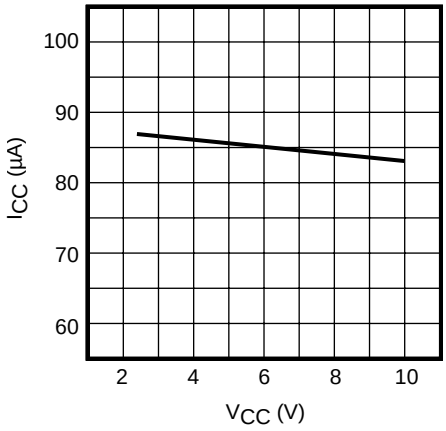

LINE REGULATION

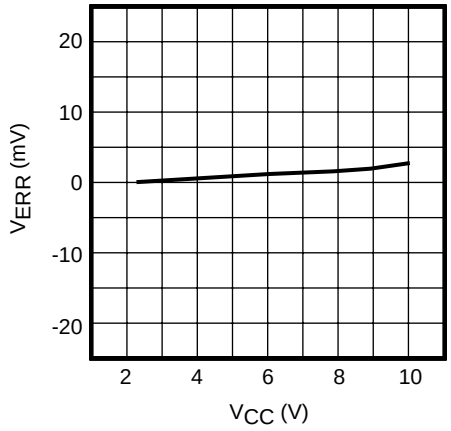

LOAD REGULATION

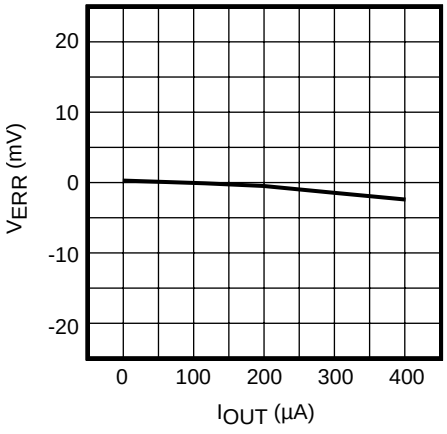

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

V_{CC} = 3 V, V_{CONT} = 2.4 V, I_{OUT} = 0 µA, T_A = 25 °C, unless otherwise specified.

OUTPUT VOLTAGE vs. CONTROL VOLTAGE

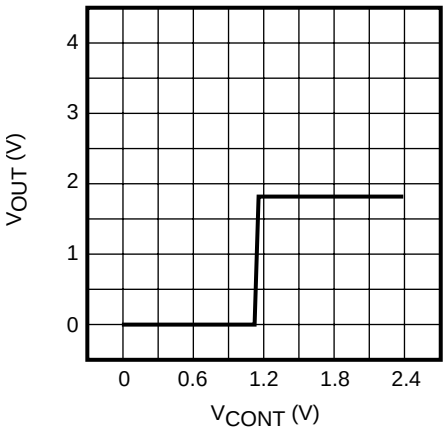

INPUT CURRENT vs. CONTROL VOLTAGE

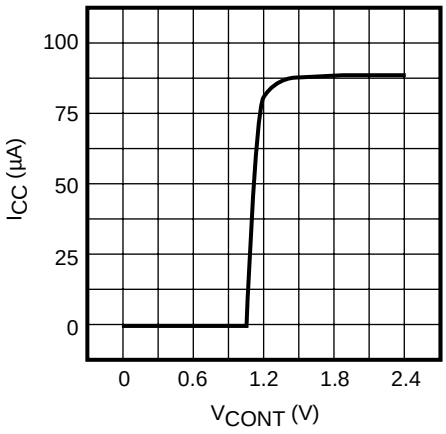

CONTROL CURRENT vs. TEMPERATURE

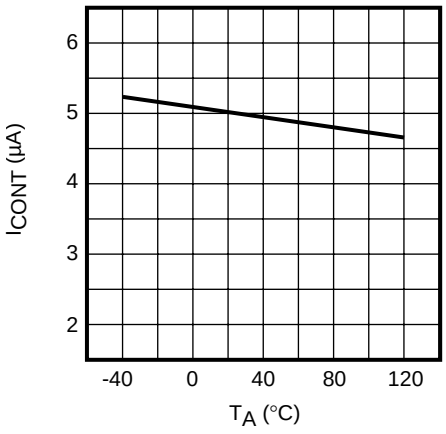

CONTROL CURRENT vs. CONTROL VOLTAGE

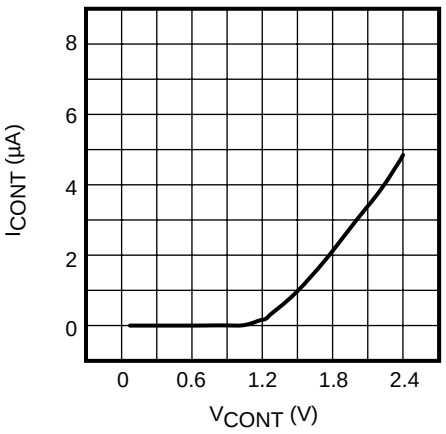

CONTROL VOLTAGE RESPONSE A

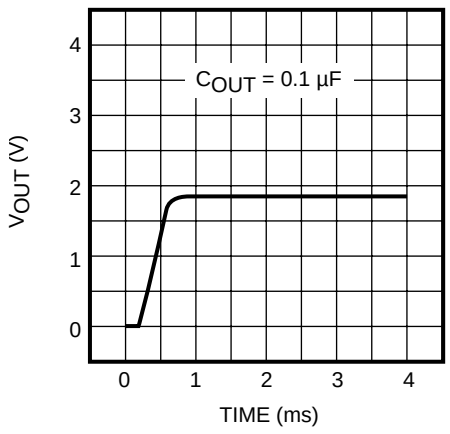

CONTROL VOLTAGE RESPONSE B

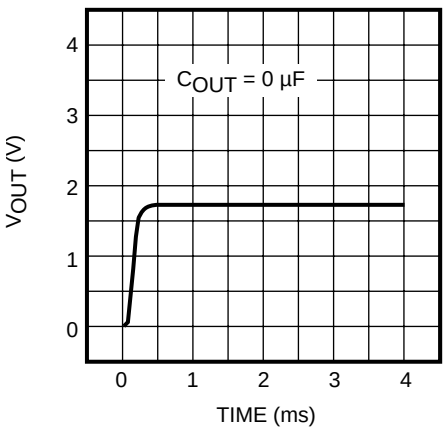

RIPPLE REJECTION RATIO A

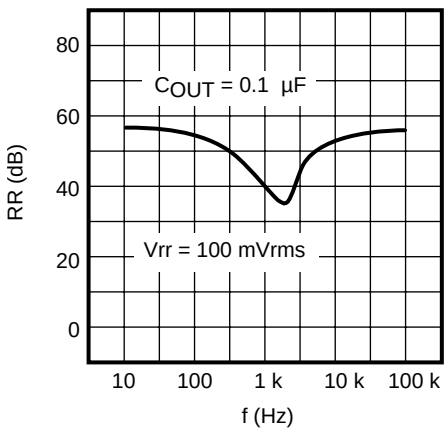

RIPPLE REJECTION RATIO B

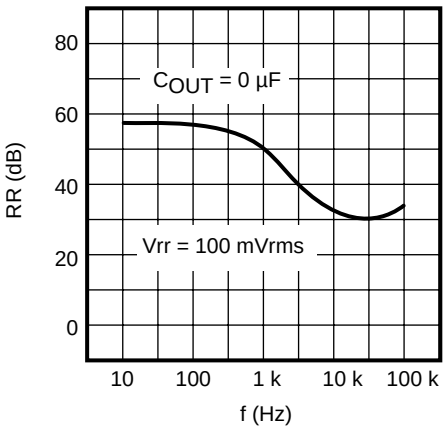

TEMPERATURE RESPONSE A

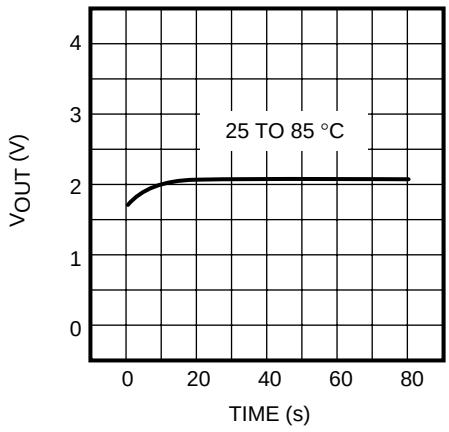

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

V_{CC} = 3 V, V_{CONT} = 2.4 V, I_{OUT} = 0 µA, T_A = 25 °C, unless otherwise specified.

TEMPERATURE RESPONSE B

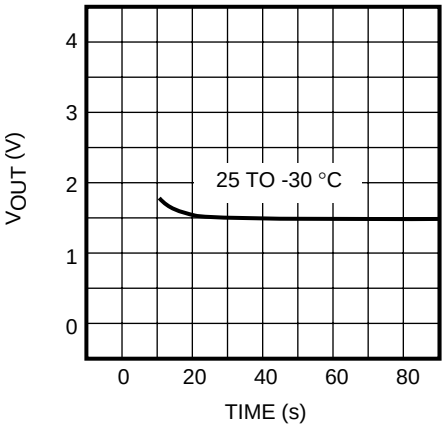

PACKAGE OUTLINE

SOT-25 (SOT-23-5)

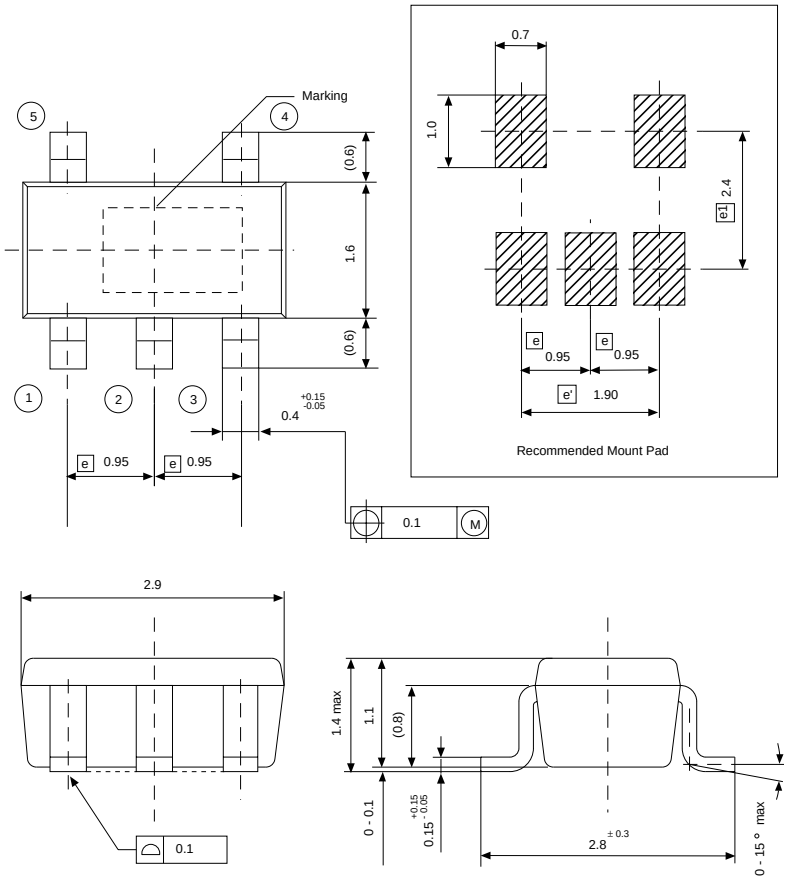

Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

Marking Information

	Marking
TK11032	32C

TOKO

Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street , Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at http://www.tokoam.com

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.

© 1999 Toko, Inc.
All Rights Reserved
IC-232-TK11032
0798O0.0K
Printed in the USA