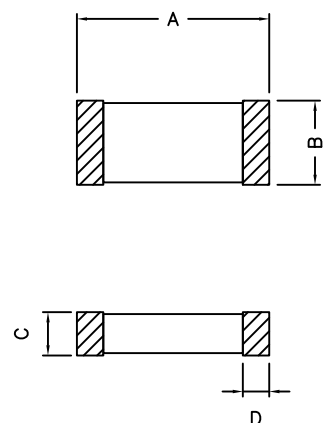


XFMRS, Inc.

SPECIFICATION FOR APPROVAL


XFMRS P/N : XFEB451616-910-3A			Rev: A/1		
DIMENSION : (m/m) <div style="text-align: center; margin: 10px 0;">  </div>			A	4.5±0.2	m/m
			B	1.6±0.2	m/m
			C	1.6±0.2	m/m
			D	0.5±0.3	m/m
			E		m/m
			F		m/m
			G		m/m
			H		m/m
			I		m/m
			J		m/m
			K		m/m
			L		m/m
			M		m/m
			N		m/m
			O		m/m
ELECTRICAL REQUIREMENTS			TEST INSTRUMENTS		
Z	91±25% Ohms	TEST FREQ.	<input checked="" type="radio"/> HP 4338A MILLION OHM METER <input type="radio"/> HP 4195A NETWORKS/SPECTRUM ANALYZER <input type="radio"/> HP4284A BIAS CURRENT SOURCE <input type="radio"/> HP 4285A PRECISION LCR METER <input type="radio"/> HP 4286A PRECISION LCR METER <input checked="" type="radio"/> HP 4291B RF IMPEDANCE / MATERIAL ANALYZER <input type="radio"/> HP 6632A DC POWER SUPPLY		
Rdc	0.030 Ohms Max	TEST FREQ.	MHz		
Idc	3000mAdc Max	TEST FREQ.	MHz		
Notes: <ol style="list-style-type: none"> 1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability. 2. Flammability: UL94V-0 3. ASTM oxygen index: > 28% 4. Insulation System: Class F 155°C. UL file E151556 5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +125°C 6. Storage Temperature Range: -55°C to +125°C 7. Aqueous wash compatible 8. SMD Lead Coplanarity: ±0.004"(0.102mm) 9. Electrical and mechanical specifications 100% tested 10. RoHS Compliant Component 					
DRAWN BY :		CHECKED BY :		APPROVED BY :	
Yuan		YK Liao		JH	
Jul-04-13		Jul-04-13		Jul-04-13	

XFMRS, Inc.

SPECIFICATION FOR APPROVAL

XFMRS P/N : XFEB451616-910-3A

Rev: A/1

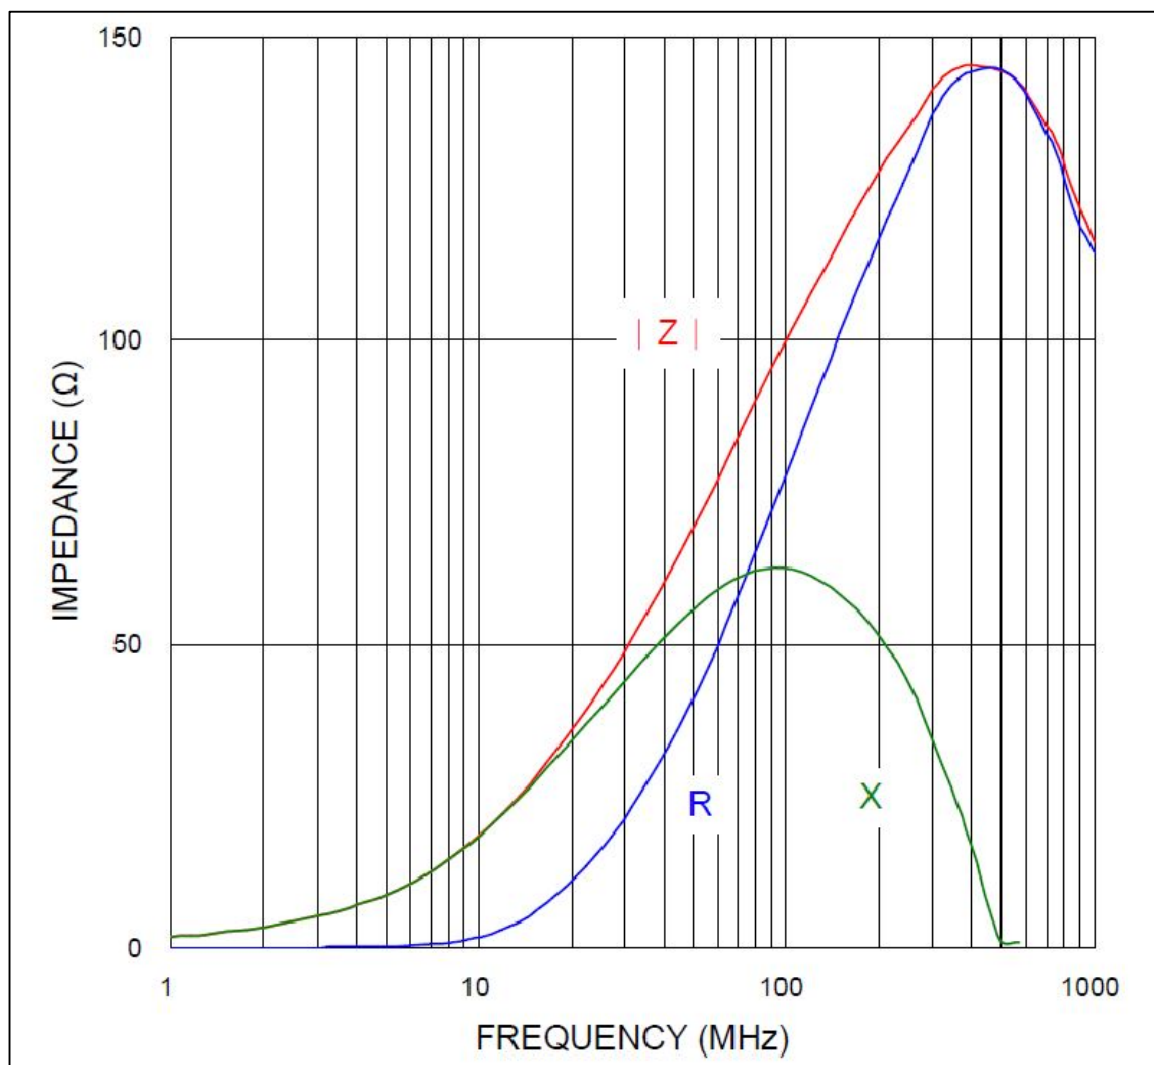

DRAWN BY :

Yuan
Jul-04-13

CHECKED BY :

YK Liao
Jul-04-13

APPROVED BY :

JH
Jul-04-13