
- 16, 24, 32 and 48 Contacts
- 3 Rows
- Class 2 and 3
- 2.54mm(0.1"), 5.08mm(0.2" Half loaded) Pitch
- High Reliability
- UL Approved

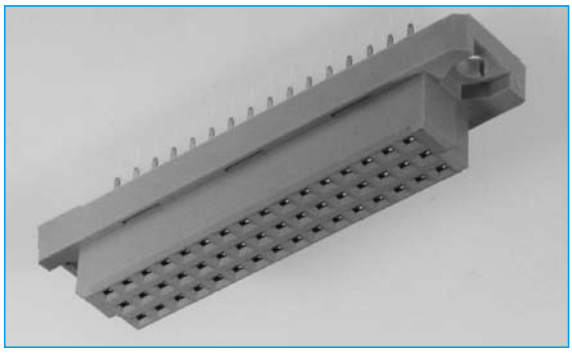

SPECIFICATION

Material

Insulator: Glass filled polyester (PBT, UL flammability 94V-0)

Contacts: Female copper alloy, male brass

Contact finish: Contact area: Gold over nickel (per requirements of performance class 3, class 2)
Termination area: Tin - plated or Gold-plated for long wrap post

Mechanical

Insertion force:
48 contacts max. 45N
32 contacts max. 30N
24 contacts max.25N
16 contacts max. 15N
Withdrawal force per contact: min 0.15N

Temperature range: -55°C to +125°C
Air and creepage distance 1.2mm min.

Electrical

Current rating: 20°C 2A
70°C 1A
100°C 0.5A

Contact resistance: ≤20mΩ (testing current 100mA)
≤40mΩ after 400 mating cycles

Capacitance between adjacent contacts: Appr. 2pF

Insulation resistance: $\geq 10^{12}\Omega$
(between adjacent contacts at 100 VDC)


Test voltage: 1,000Vrms between contacts (2.54mm spacing)
1,550Vrms between contacts (5.08mm spacing)
1,550Vrms between contacts and body

Operating voltage: 250V AC

Agency approval

U/L Electric rating: 250V, 2A
Mating Cycles: Class 2 = 400 Class 3 = 50

OUTLINE DRAWING

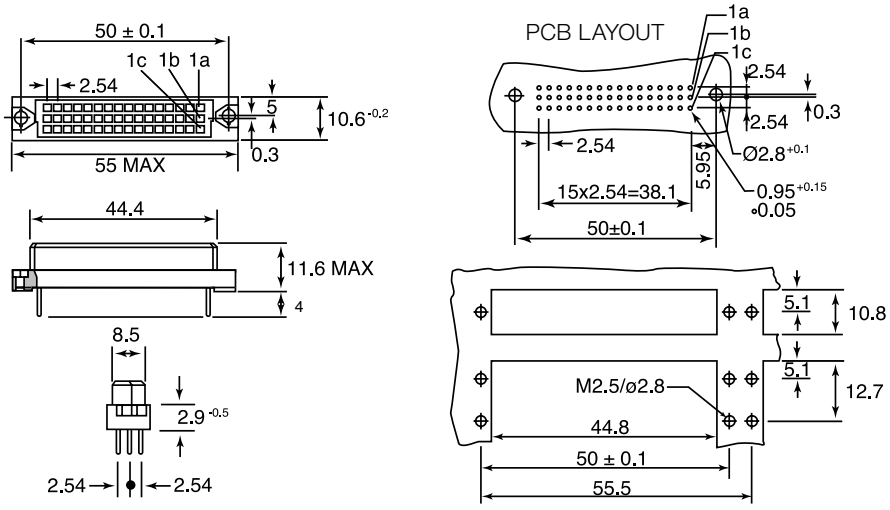

a + b + c	
a + c	
a + b	
a	
a + b + c All even no.	
a + c All even no.	

ORDERING INFORMATION

DBC	DIN	F	16	HC	A	S	3
Dubilier Connectors	Series DIN 41612	Connector Type F = Female	Nº of Ways 16 =16 ways 24 = 24 ways 32 = 32 ways 48 = 48 ways	Housing Style HC = Half C	Position of Contacts A, AB, AC, ABC, ABC1 = A+B+C even nº. AC1=AC even nº.	Termination Style S = Straight Solder Tail length options available on request	Quality Class 3 = class 3 2 = class 2

SECTION 10