CREE POWER

PRELIMINARY **CSD01060**

ZERO RECOVERY™ RECTIFIER

Features

- 600 Volt Schottky Rectifier
- Zero Reverse Recovery
- Zero Forward Recovery
- High Frequency Operation
- Temperature Independent Switching Behavior
- Extremely Fast Switching
- Positive Temperature Coefficient on V_F


Benefits

- Replace Bipolar with Unipolar Rectifiers
- Essentially No Switching Losses
- Higher Efficiency
- Reduction Of Rectifier Heat Sink
- Parallel Devices without Thermal Runaway

Applications

- Switch Mode Power Supplies
- Power Factor Correction
- Motor Control

Package





Maximum Ratings

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	600	V
Surge Peak Reverse Voltage	V_{RSM}	600	V
DC Blocking Voltage	V_{DC}	600	V
Average Forward Current T_C=150°C	$I_{F(AV)}$	1	A
Repetitive Peak Forward Surge Current T_C=25°C, t_P=8.3ms, Half Sine Wave	I_{FRM}	5	A
Non-Repetitive Peak Forward Surge Current T_C=25°C, t_p=10µs, Pulse	I_{FSM}	20	A
Power Dissipation T_C = 25°C	P_{tot}	21.4	W
Operating Junction and Storage Temperature	T_J , T_{stg}	-55 to +175	°C

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Units
Forward Voltage I_F = 1A T_J=25°C I_F = 1A T_J=150°C	V_F		1.6 2.0	1.8 2.4	V
Reverse Current V_R = 600V T_J=25°C V_R = 600V T_J=150°C	I_R		20 40	100 500	µA
Total Capacitive Charge V_R = 600V,I_F = 1A, d*i*/d*t* = 500 A/µs, T_J = 25°C	Q_C		3.3		nC
Total Capacitance V_R = 0V, T_J = 25 °C, f =1MHz V_R = 200V, T_J = 25 °C, f =1MHz V_R = 400V, T_J = 25 °C, f =1MHz	C		80 11 8.5		pF

NOTE:
1. This is a majority carrier diode, so there is no reverse recovery charge.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Units
Thermal Resistance from Junction to Case	$R_{\theta JC}$		7		°C/W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$		60		°C/W

Typical Performance

Figure 1. Forward Characteristics

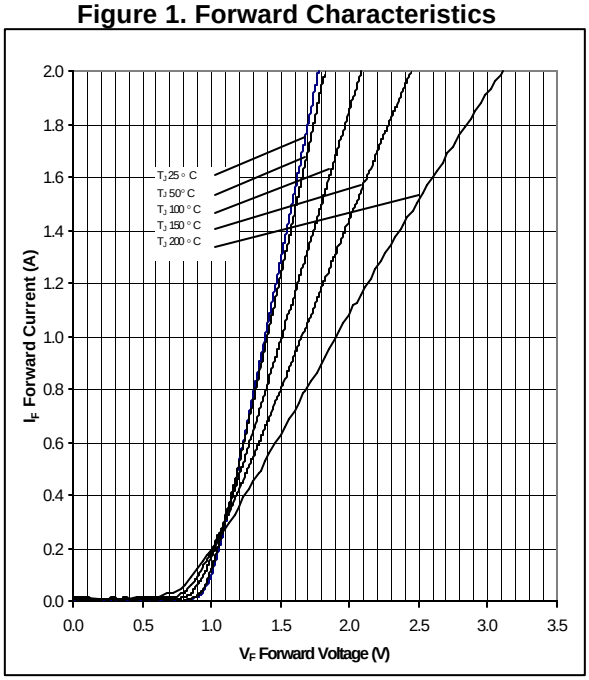


Figure 2. Reverse Characteristics

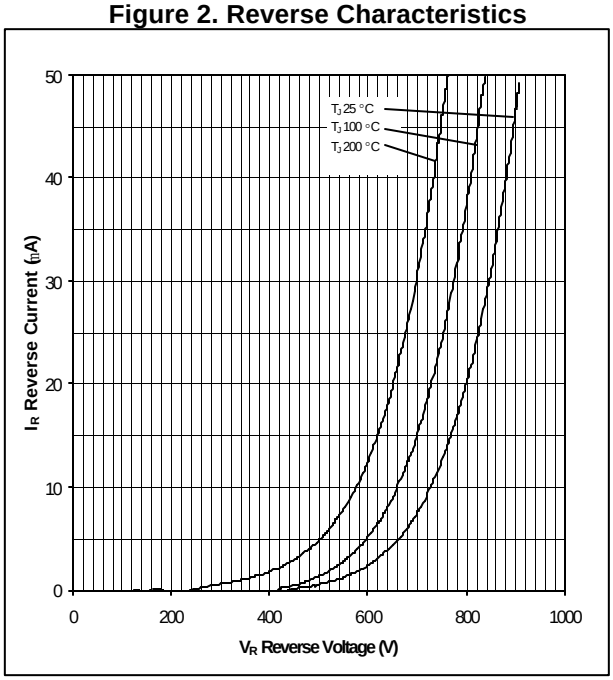


Figure 3. Current Derating



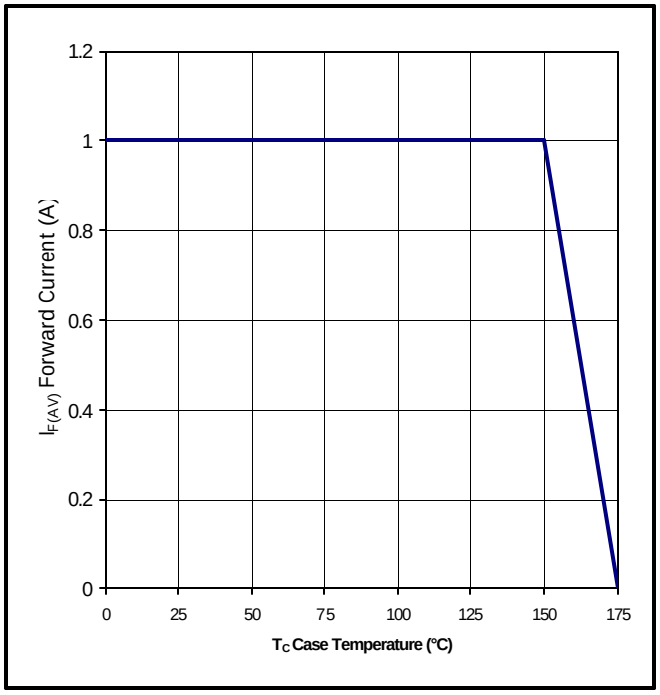


Figure 4. Capacitance vs. Reverse Voltage

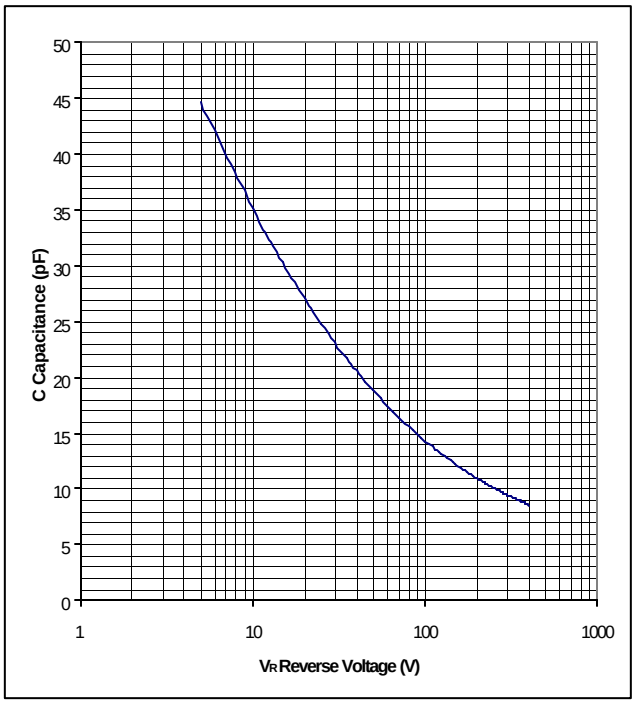

Package Dimensions

Package TO-220-2

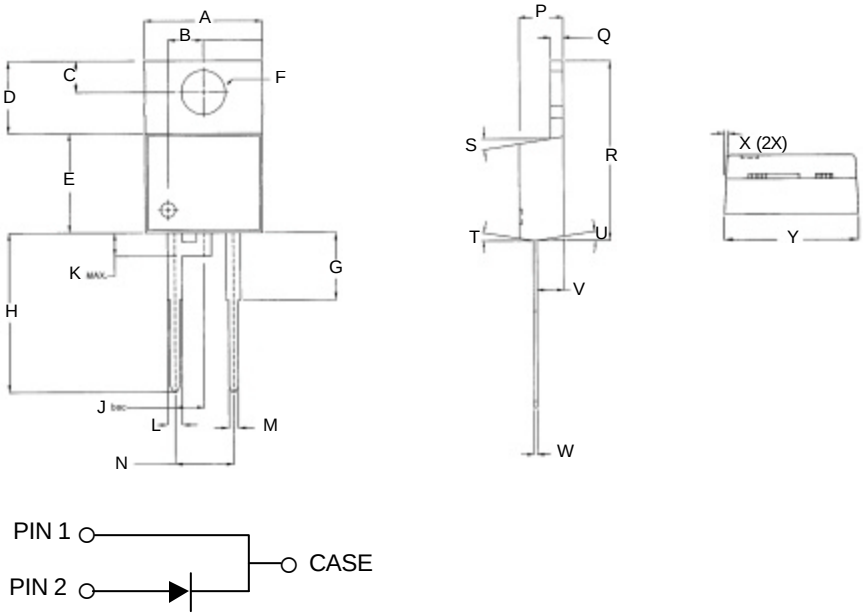


POS	Inches		Millimeters	
	Min	Max	Min	Max
A	.402	.408	10.211	10.364
B	.120	.124	3.048	3.150
C	.106	.110	2.692	2.794
D	.245	.251	6.223	6.375
E	.335	.345	8.509	8.763
F	.149	.153	3.784	3.886
G	.220	.240	5.588	6.096
H	.540	.550	13.716	13.970
J	.100 REF		2.540 REF	
K		.080		2.032
L	.050	.056	1.270	1.422
M	.032	.038	.813	.956
N	.197	.203	5.004	5.156
P	.170	.180	4.318	4.572
Q	.048	.052	1.219	1.321
R	.583	.593	14.808	15.062
S	6.5°	8.5°	6.5°	8.5°
T	6.5°	8.5°	6.5°	8.5°
U	6.5°	8.5°	6.5°	8.5°
V	.103	.107	2.616	2.718
W	.015	.021	.381	.533
X	2.0°	4.0°	2.0°	4.0°
Y	.396	.406	10.058	10.312


NOTE:

1. Dimension L, M, W apply for Solder Dip Finish.

Package TO-252-2

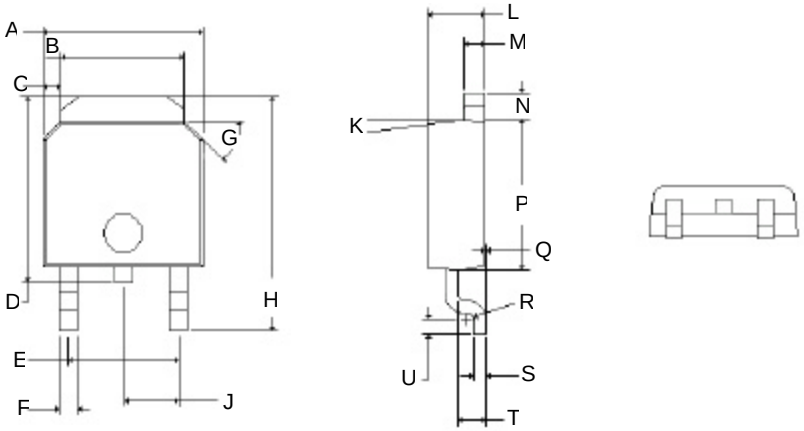

POS	Inches		Millimeters	
	Min	Max	Min	Max
A	.255	.265	6.477	6.731
B	.197	.205	5.004	5.207
C	.027	.033	.686	.838
D	.292	.322	7.417	8.179
E	.178	.182	4.521	4.623
F	.025	.035	.635	.889
G	44°	46°	44°	46°
H	.382	.397	9.703	10.084
J	.090TYP		2.286TYP	
K	6°	8°	6°	8°
L	.086	.094	2.184	2.388
M	.030	.034	.762	.864
N	.040	.044	1.016	1.118
P	.235	.245	5.969	6.223
Q	0.00	.004	0.00	.102
R	R0.01TYP		R0.31TYP	
S	.017	.023	.428	.588
T	.040	.044	1.016	1.118
U	.021	.027	.534	.686



Part Number	Package	Marking
CSD01060A	TO-220-2	SD01060
CSD01060E	TO-252-2	SD01060

Cree, Inc.
Power Products
4600 Silicon Drive
Durham, NC 27703 • USA
tel: 919-313-5300
fax: 919-313-5451
www.cree.com

Copyright © 2001 Cree, Inc. All rights reserved.
Permission is given to reproduce this document provided the entire document (including this copyright notice) is duplicated.

The information in this document is subject to change without notice.

Cree and the Cree logo are trademarks of Cree, Inc.