Ordering number :EN953C

SVC203SPA

Diffused Junction Type Sillicon Diode

Varactor Diode (IOCAP)
for FM Receiver Electronic Tuning

Features


· The SVC203SPA is a varactor diode of dual type with a good linearity of C-V characteristic. It excels in temperature characteristic, large input characteristics and suitable for use in FM electronic tuning appilications (low voltage).

Package Dimensions

unit:mm

1129A

[SVC203SPA]

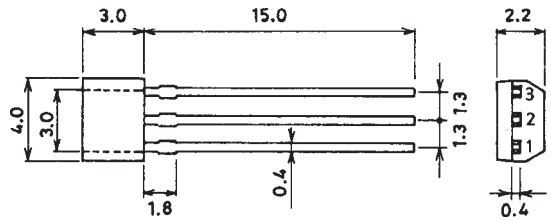

1,3:Anode
2:Cathode

SANYO:SPA

Specifications

Absolute Maximum Ratings at Ta = 25˚C


Parameter	Symbol	Conditions	Ratings	Unit
Reverse Voltage	V_R		16	V
Forward Current	I_F		100	mA
Allowable Power Dissipation	P_D		100	mW
Junction Temperature	Tj		125	˚C
Storage Temperature	Tstg		–55 to +125	˚C

Electrical Characteristics at Ta = 25˚C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Breakdown Voltage	$V_{(BR)R}$	I_R=10μA	16			V
Reverse Current	I_R	V_R=10μA			50	nA
Interterminal Capacitance*	$C_{3.0V}$	V_R=3.0V	36.92		43.03	pF
	$C_{4.5V}$	V_R=4.5V	26.13		34.45	pF
	$C_{6.0V}$	V_R=6.0V	18.04		25.61	pF
	$C_{8.0V}$	V_R=8.0V	12.64		16.84	pF
Quality Factor	Q	V_R=3.0V, f=100MHz	60			
Capacitance Ratio	CR	$C_{3.0V}/C_{8.0V}$	2.50		3.00	
Matching Tolerance	ΔC_m	$(C_{max}–C_{min})/C_{min}$, V_R=2.0V to 8.0V			0.03	

Note)*:Capacitance value of one diode

Electrical Connection



1,3:Anode
2:Cathode


SANYO Electric Co.,Ltd. Semiconductor Bussiness Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN


Address and Capacitance Value

V_R=3.0V		V_R=4.5V		V_R=6.0V		V_R=8.0V	
Address	Capacitance (pF)	Address	Capacitance (pF)	Address	Capacitance (pF)	Address	Capacitance (pF)
63	36.92~38.02	49	26.13~26.92	34	18.04~18.59	19	12.46~12.83
64	37.85~38.98	50	26.78~27.59	35	18.49~19.05	20	12.77~13.15
65	38.79~39.96	51	27.45~28.27	36	18.95~19.52	21	13.09~13.48
66	39.76~40.95	52	28.14~28.98	37	19.43~20.01	22	13.42~13.82
67	40.76~41.98	53	28.85~29.71	38	19.91~20.51	23	13.76~14.17
68	41.78~43.03	54	29.57~30.45	39	20.41~21.02	24	14.09~14.52
		55	30.30~31.21	40	20.93~21.56	25	14.44~14.88
		56	31.06~31.99	41	21.45~22.09	26	14.81~15.26
		57	31.84~32.80	42	21.98~22.64	27	15.18~15.64
		58	32.63~33.61	43	22.53~23.21	28	15.56~16.03
		59	33.45~34.45	44	23.09~23.78	29	15.95~16.43
				45	23.67~24.38	30	16.35~16.84
				46	24.27~25.00		
				47	24.87~25.61		

Rank Width

$C_{3.0V}$ \ $C_{8.0V}$	19	20	21	22	23	24	25	26	27	28	29	30
63												
64												
65												
66												
67												
68												

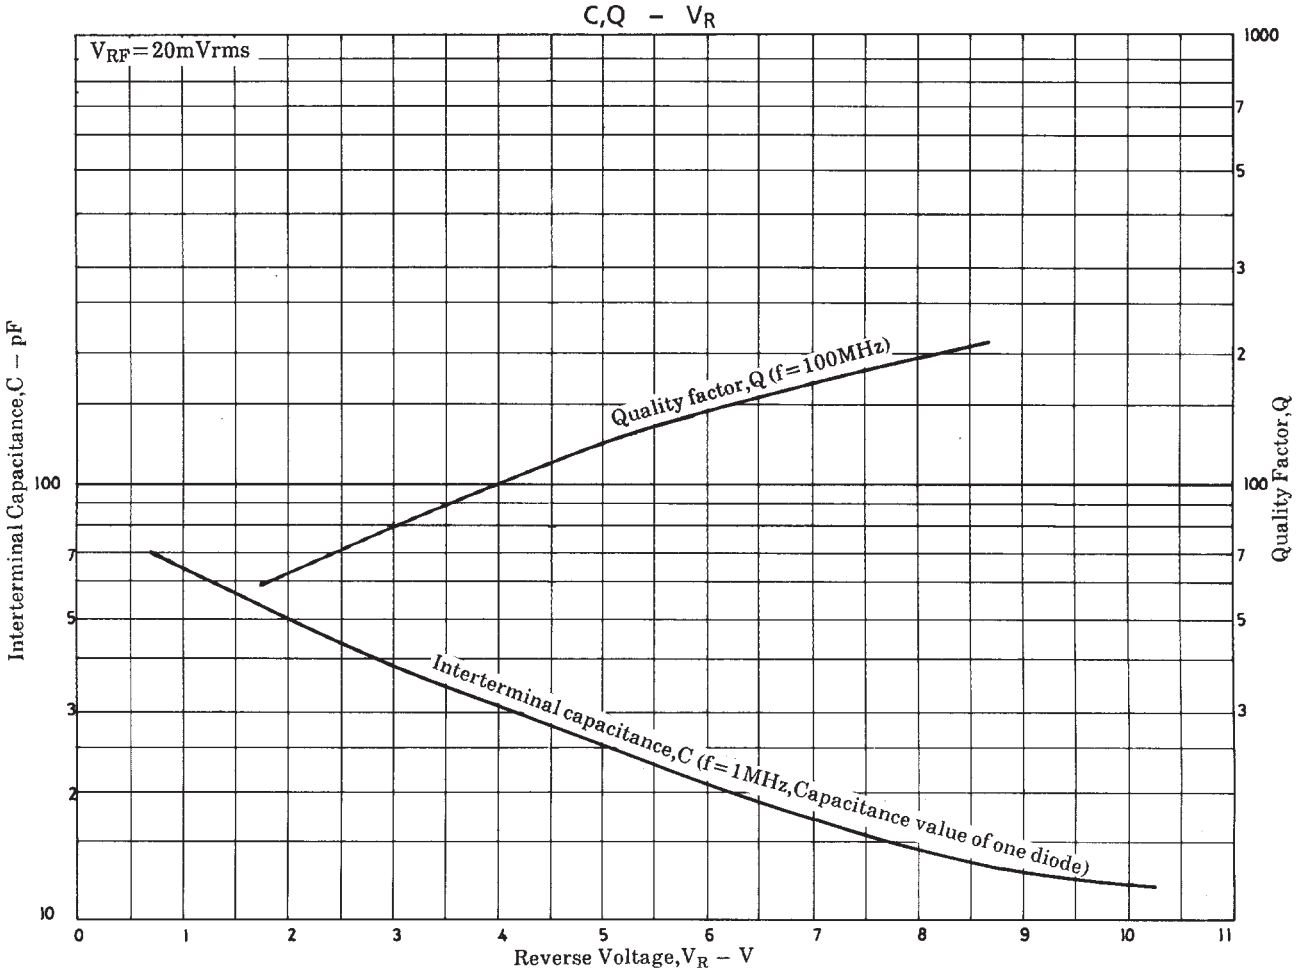
C,Q – V_R
V_{RF}=20mVrms
Quality factor,Q (f=100MHz)
Interterminal capacitance,C (f=1MHz,Capacitance value of one diode)
Interterminal Capacitance,C – pF
Quality Factor,Q
Reverse Voltage,V_R – V
1000
100
10
0
1
2
3
4
5
6
7
8
9
10
11

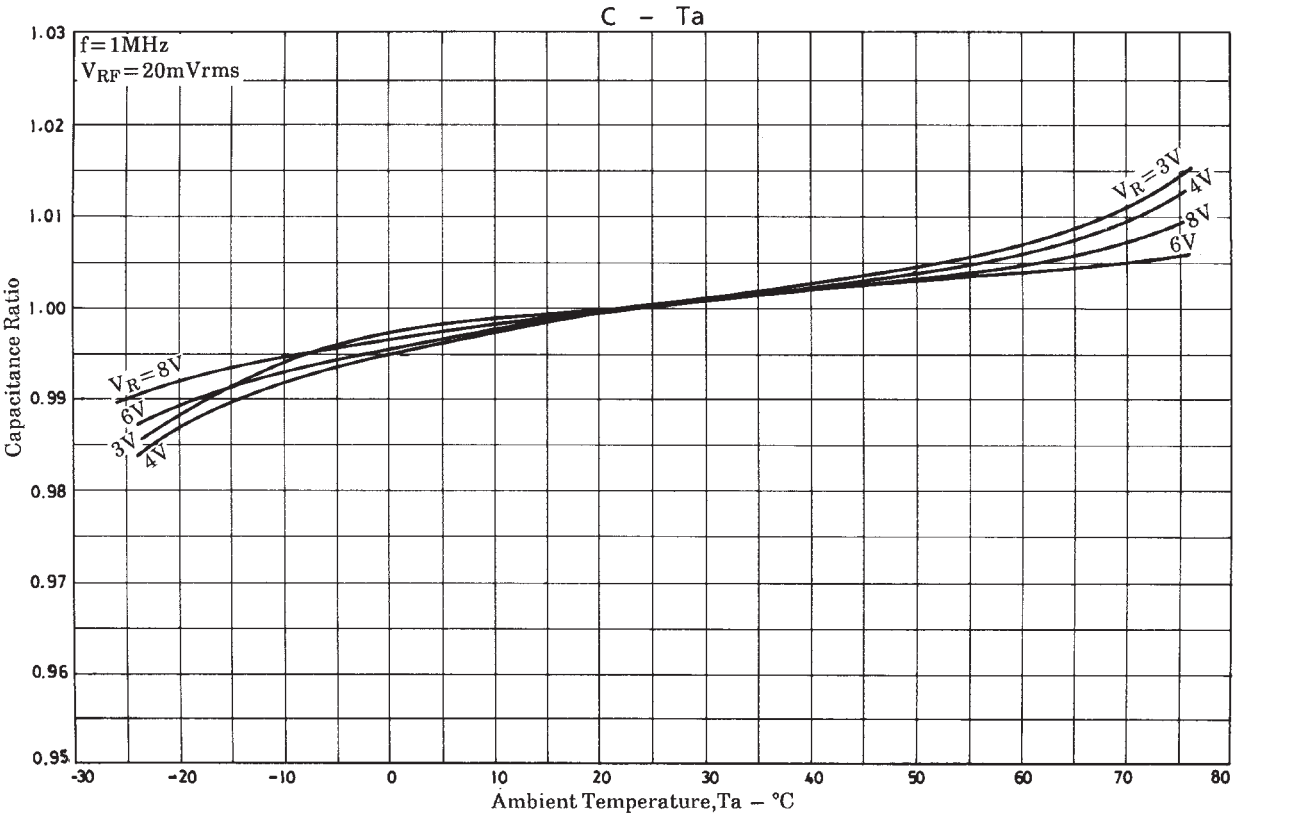
C – Ta
f=1MHz
V_{RF}=20mVrms
V_R=3V
4V
8V
6V
V_R=8V
6V
3V
4V
Capacitance Ratio
Ambient Temperature,Ta – °C
1.03
1.02
1.01
1.00
0.99
0.98
0.97
0.96
0.95
-30
-20
-10
0
10
20
30
40
50
60
70
80

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1998. Specifications and information herein are subject to change without notice.