
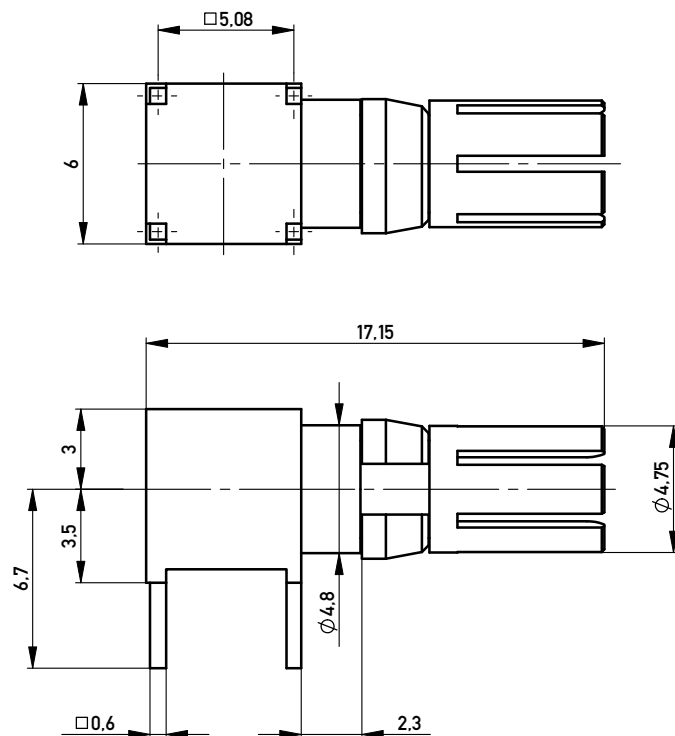


Masse nur informativ,
keine Prüfpläne erstellen.

Technical Data:

Insertion/withdrawal force per contact: $\leq 10\text{ N} / \leq 1.6\text{ N}$
 Mechanical operations: ≥ 500
 Contact resistance: $\leq 1\text{ m}\Omega$

Operation Temperature: $-55^\circ\text{C} - +125^\circ\text{C}$

Solder temperature: according JEDEC 020C
 Suitable assembly process: leadfree wave / reflow soldering

RoHS compliance: yes (6/6)

Designed for use with: right angle female 2mm HM connector

Packaging: antistatic plastic bag
 Packaging unit: 100 pieces per bag
 Marking of packaging: label or direct printed on bag
 required date see ERNI labeling spec. 254792

Current capacity: 40 A

Missing informations
and dimensions
see at DIN 41626

053298	1	2 - 4 μm NiP+, 0.15 μm Au
284924	1	2 - 3 μm Ni, min. 1.3 μm Au
Part-No.	Class	Plating

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 10161 to be observed.

Information:			Tolerances		 All Dimensions in mm	Scale	5:1		
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.			Designation			
						High Current Female Contact <i>Right Angle Solder Termination</i>			
			G		19.08.2008			www.ERNI.com	284923
Index		Date					Class	STVSKO	A3

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.