


Legacy NZG100-5M 100 Hz to 5 MHz

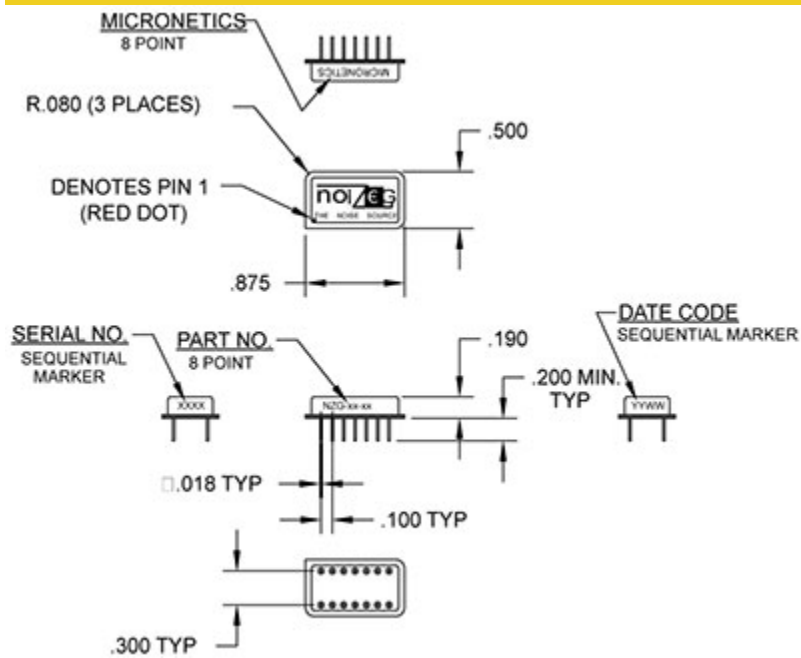

Specifications

| | |
|----------------------------------|--------------------|
| RF Frequency | 100 Hz to 5 MHz |
| Noise Output | 89.2 dB Min ENR |
| Noise Spectral Density (N_o) | -84.8 dBm/Hz Min |
| Noise Power (N) | 100 mV min in Band |
| Peak Factor | 5:1 |
| Bias Voltage | 15 V |
| Impedance | 600 ohms |

Package and Connectivity

| | |
|--------------|------------|
| Construction | DIP 14 Pin |
|--------------|------------|

Environmental

| | |
|-----------------------|---------------|
| Operating Temperature | 0 to 70 °C |
| Storage Temperature | -60 to 150 °C |

Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com


MICRONETICS

MICRONETICS
8 POINT




R.080 (3 PLACES)

DENOTES PIN 1
(RED DOT)

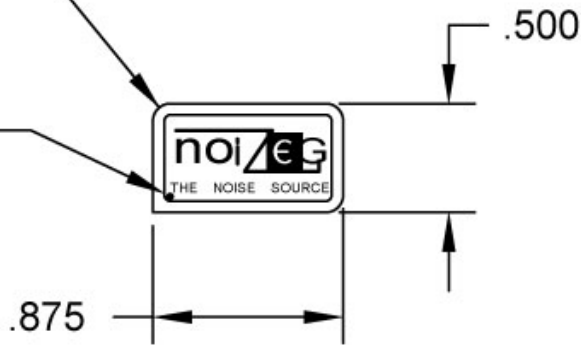

SERIAL NO.
SEQUENTIAL
MARKER

PART NO.
8 POINT



DATE CODE
SEQUENTIAL MARKER



.190

.200 MIN.
TYP

□.018 TYP

.100 TYP

.300 TYP

