

BAND PASS FILTER

SURFACE MOUNT MODEL FBS-30

OPTIMIZED BANDWIDTH


F_c = 30 MHz

SPECIFICATIONS:

Center Frequency:	30 MHz	40 dB Bandwidth :	24 - 36 MHz
Insertion Loss :	3.5 dB (Max)	Power Rating:	1 Watt (Max.)
1 dB Ripple Bandwidth	1.5 Mhz	Impedance :	50 Ohms
20 dB Bandwidth :	27 - 33 MHz	Operating Temp. Range:	-20° to +70° C



MECHANICAL OUTLINE:124S

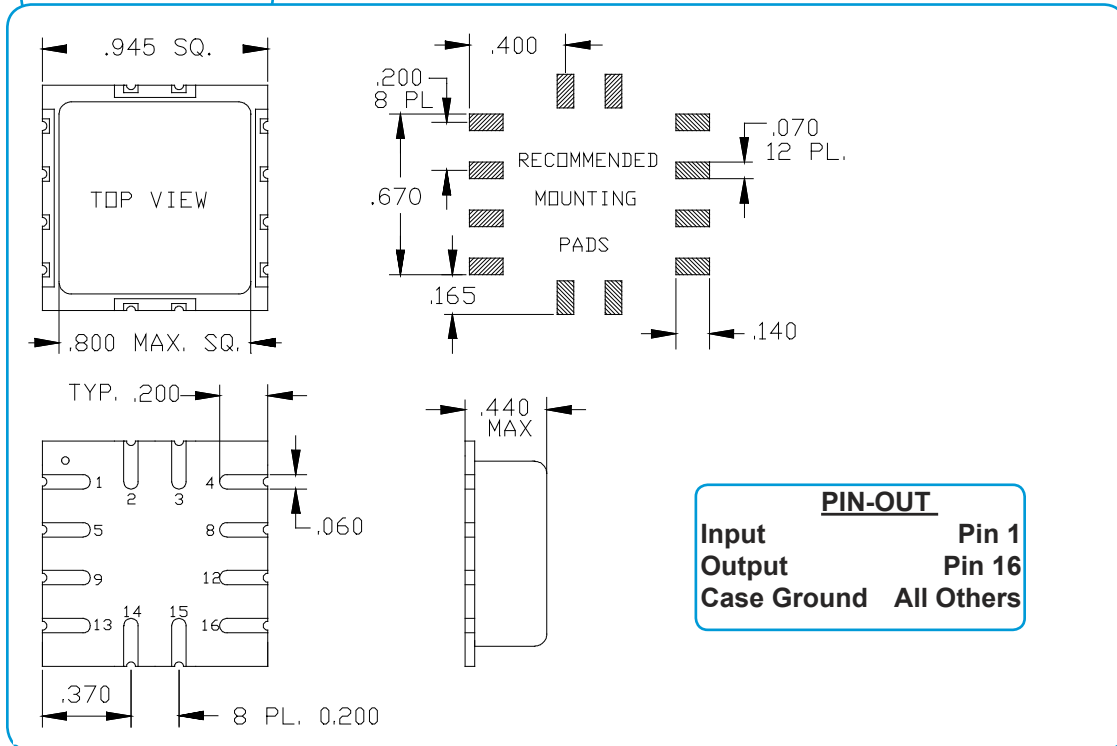

BAND PASS FILTER

SURFACE MOUNT MODEL FBS-30

OPTIMIZED BANDWIDTH

F_c = 30 MHz

PERFORMANCE PLOTS

