Product data sheet
Characteristics

XVR10J03
Rotating beacon, 106 mm, green, without buzzer, 12 V AC DC



Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	106 mm
IP degree of protection	IP55 (with accessory) conforming to IEC 60529 IP23 conforming to IEC 60529
[Us] rated supply voltage	12 V AC/DC
Light source	High luminosity LED, green

Complementary

Material	ABS (acrylonitrile butadiene-styrene): body part PMMA (polymethyl methacrylate): globe
CAD overall width	106 mm
CAD overall depth	106 mm
Net weight	0.5 kg
Marking	CE
Product mounting	By 3 M4 screws
Supply voltage limits	10…15 V DC 10.8…13.2 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	250 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm²
AWG gauge	AWG 18
Cable length	400 mm

Environment

Standards	EN 61000-6-2 EN 61000-6-4
Product certifications	UL

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Protective treatment	TC
Ambient air temperature for storage	-35…70 °C
Ambient air temperature for operation	-10…50 °C
Electrical shock protection class	Class II conforming to IEC 61140

Packing Units


Package 1 Weight	0.450 kg
Package 1 Height	1.400 dm
Package 1 width	1.400 dm
Package 1 Length	1.900 dm

Contractual warranty

Warranty	18 months

Rotating Mirror Beacon

Dimensions

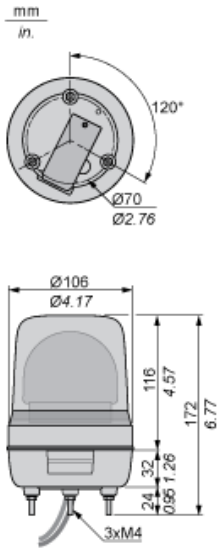

Rotating Mirror Beacon

Panel Cut-out

