


SHEET 1 OF 1





CIRCUIT: SPST
OFF (ON) ▲

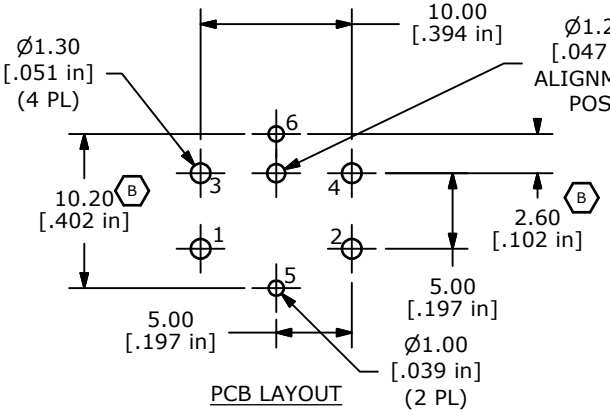

PCB LAYOUT

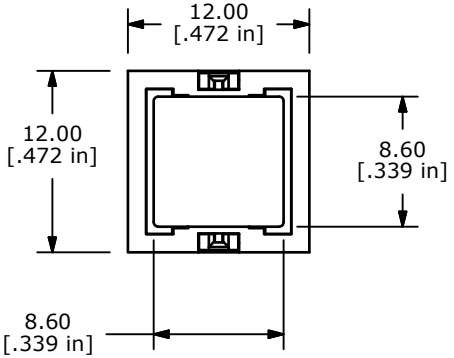

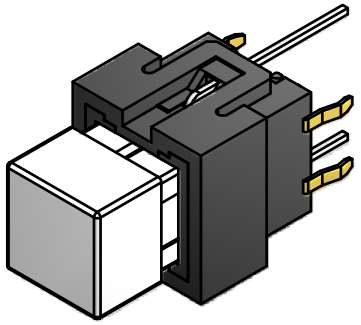

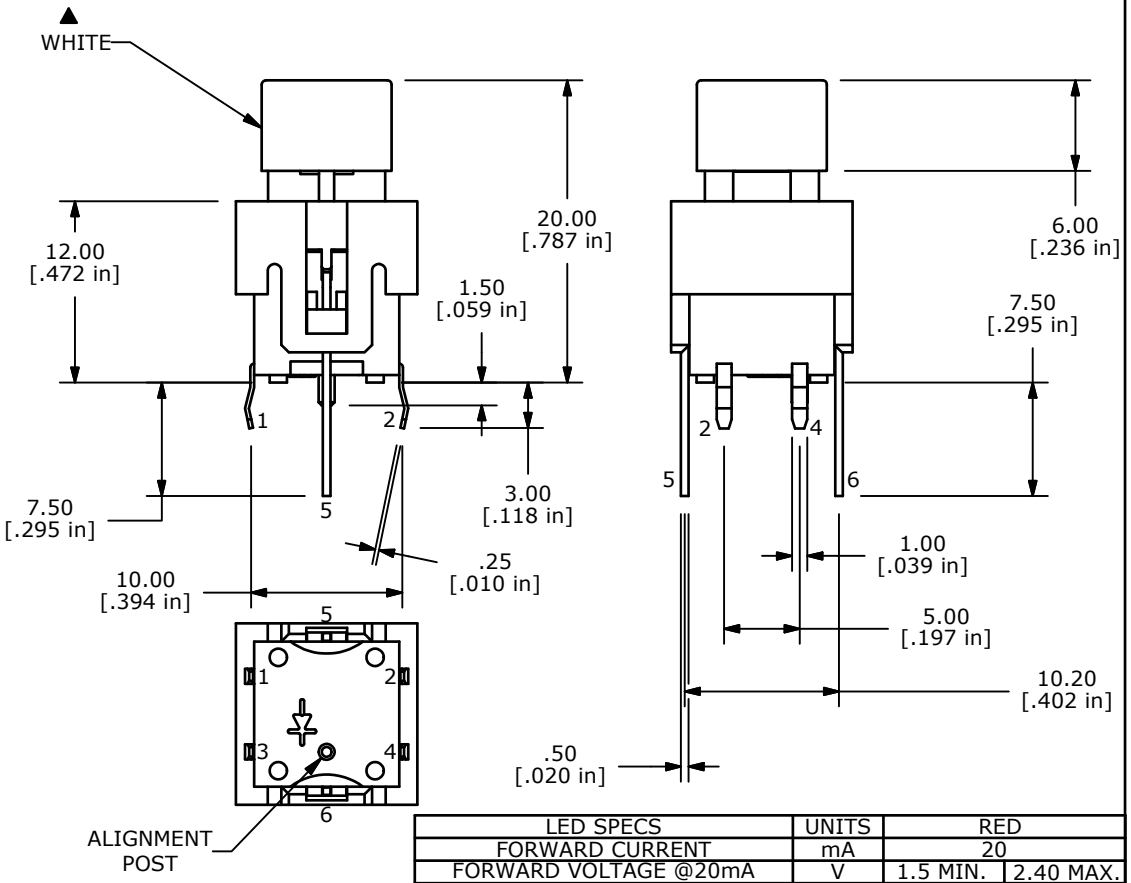

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 20VDC @ 1mA
4. CONTACT RESISTANCE: 200Ω MAX.
5. INSULATION RESISTANCE: 100MΩ MIN. @ 100VDC.
6. ▲ OPERATING FORCE: 125± 35gf
7. TRAVEL: 1.3 +/- 0.3 mm
8. OPERATING TEMPERATURE: -20˚C TO 70˚C
9. OPERATING LIFE: 300,000 CYCLES
10. ▲ LED: RED
11. ▲ DENOTES CRITICAL PARAMETERS
12. 2002/95/EC (ROHS) COMPLIANT
13. CONTACT MATR'L:GOLD FLASH OVER NICKEL

LED SPECS	UNITS	RED	
FORWARD CURRENT	mA	20	
FORWARD VOLTAGE @20mA	V	1.5 MIN.	2.40 MAX.
LUMINOUS INTENSITY @ 20mA	mcd	65 MIN.	120 TYP.

REV	PCR NO	DESCRIPTION	DATE	BY
C	20507	Added Note For Gold Flash Over Nickel	3/2/2012	MM
B	19590	UPDATE PCB LAYOUT	1/17/11	BGL
A	18656	New Release	9/14/09	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE LP15S1WHTRED-N

SCALE	DATE	DR	DWG	REV
2 : 1	8/17/2009	rc	B270000	C